F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94	2004-094 I	COOK	40	6
STA.		TO STA.		
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		

62835



1 TYPICAL SECTION S. WENTWORTH AVENUE

- 10.3' STA 100+00.10 TO STA 100+52.89
- VARIES STA 102+58.94 TO STA 106+31.13
- 6.4' & VARIES STA 109+42.35 TO STA 131+93.21

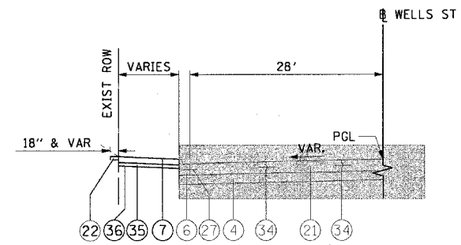

3 TYPICAL SECTION S. WELLS STREET

STA 506+92.81 TO STA 508+82.12
STA 510+66.67 TO STA 512+16.34
STA 516+19.18 TO STA 517+92.11
STA 520+87.87 TO STA 521+69.58
STA 522+86.58 TO STA 535+32.53

PROPOSED LEGEND:

- 4 SUB-BASE GRANULAR MATERIAL, TYPE B, 8"
- 5 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12 (MODIFIED)
- 6 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-V.12
- 7 PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH
- 21 PORTLAND CEMENT CONCRETE PAVEMENT, 10" (JOINTED)
- 22 SODDING, SALT TOLERANT / TOPSOIL FURNISH AND PLACE, 4 INCH
- 27 TIE BARS - 24" LONG, #6 EPOXY COATED BARS AT 24" CENTERS
- 34 KEYED LONGITUDINAL CONSTRUCTION JOINT - 24" LONG, #6 EPOXY COATED DEFORMED TIE BARS AT 24" CENTERS
- 35 SAND CUSHION, 3 INCH
- 36 SHAPING AND GRADING ROADWAY

WORK TO BE DONE BY OTHERS

NOTES:

1. FOR STA. 106+31.13 TO STA. 109+42.35 ALONG WENTWORTH AVENUE AND FOR STA. 512+16.34 TO STA. 516+19.18 ALONG WELLS STREET THE EXISTING SIDEWALK IS TO REMAIN.
2. SEE ROADWAY PLANS FOR EXACT SIDEWALK AND SODDING DIMENSIONS.

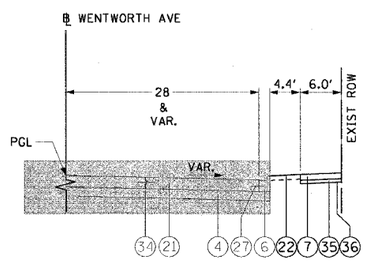

2 TYPICAL SECTION S. WENTWORTH AVENUE

STA 100+52.89 TO STA 102+58.94

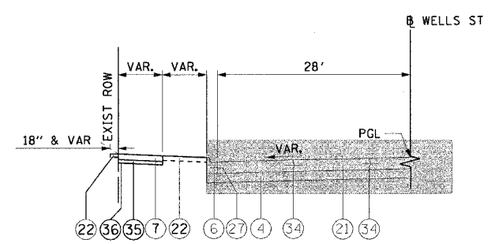

4 TYPICAL SECTION S. WELLS STREET

STA 508+82.12 TO STA 510+66.67
STA 517+92.11 TO STA 520+87.87
STA 521+69.58 TO STA 522+86.58

CTE ENGINEERS
CONSOER TOWNSEND ENVIRODYNE ENGINEERS, INC.
303 EAST WACKER DRIVE, SUITE 600
CHICAGO ILLINOIS 60601-5202, PHONE: (312) 938-0300

1 OF 1

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 90/94 (DAN RYAN EXPRESSWAY)
63rd ST TO 59th ST (SIDEWALKS & DRIVEWAYS)
PROPOSED TYPICAL SECTIONS
S. WENTWORTH AVENUE &
S. WELLS STREET

SCALE: H:1"=10', V:1"=5' DRAWN BY: JB
DATE: MARCH 04, 2005 CHECKED BY: RMG

m:\p04068\dgn\14c-cnt-9\cdd_cnt\3c01\sht\s9c100220.sht
03/01/2005 10:48:23 AM