

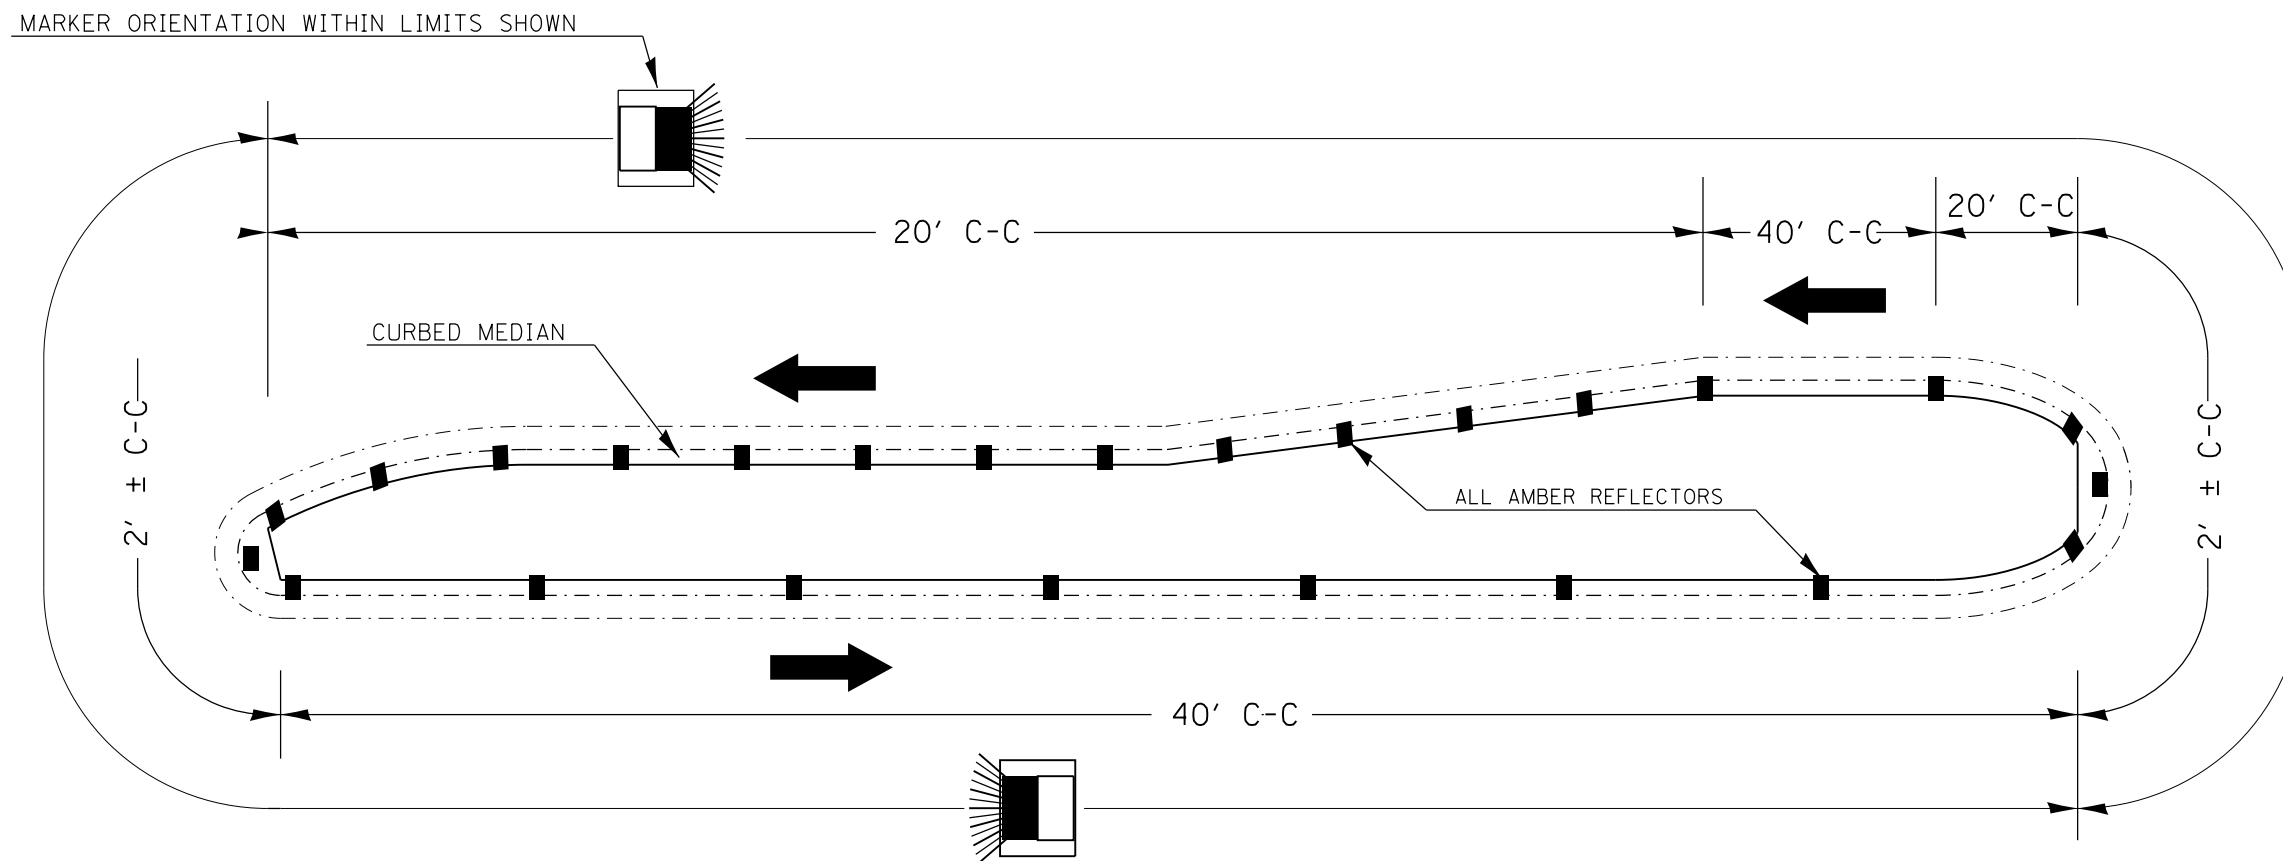


TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS

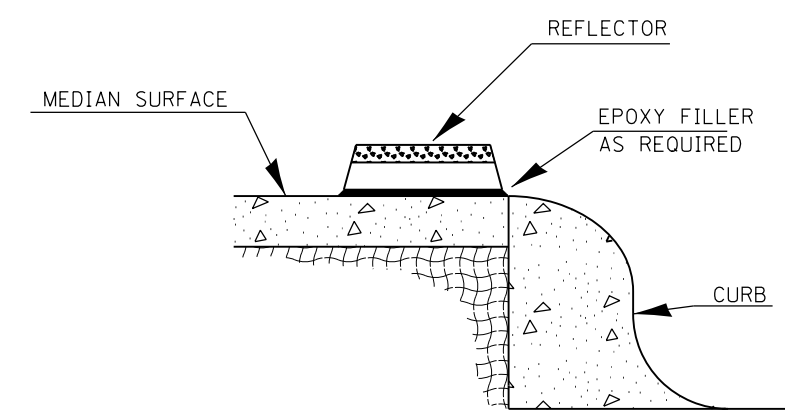

1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.
4. REFER TO SCHEDULES FOR PRISMATIC REFLECTOR QUANTITIES.

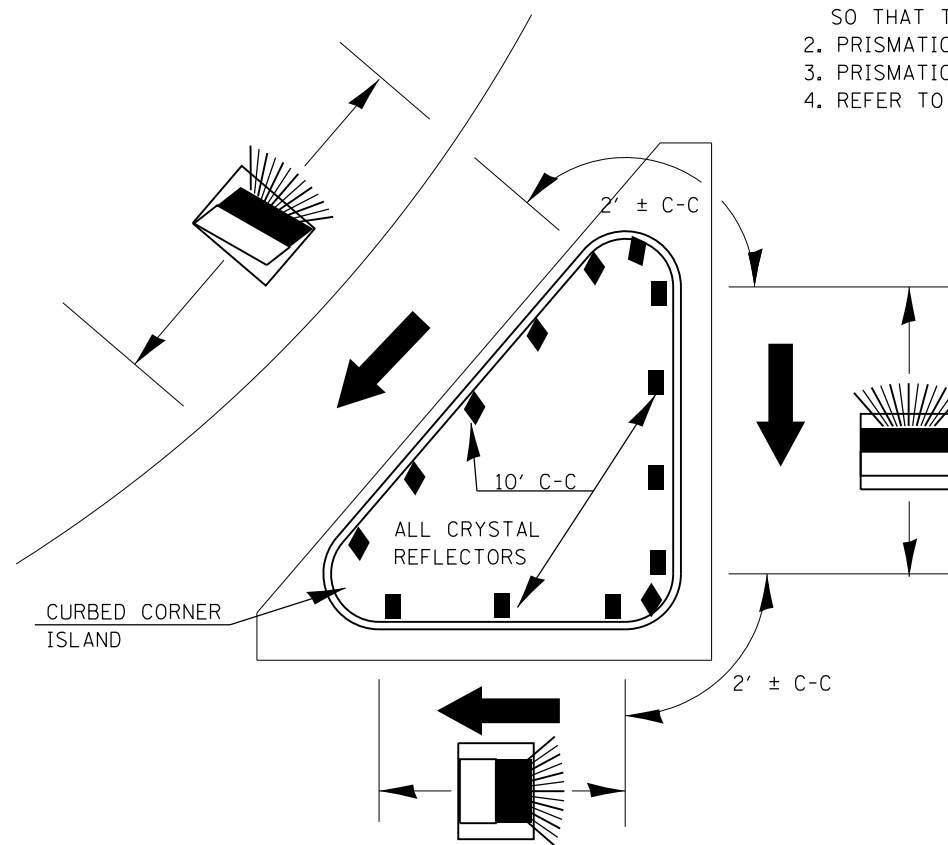

SECTION VIEW

LEGEND

	DIRECTION OF TRAFFIC
	PRISMATIC REFLECTOR

NOT TO SCALE

FILE NAME =	USER NAME = sparksgw	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PRISMATIC REFLECTOR DETAILS (PLACED ON CURB)				F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PRISM.DGN	2890-sht-district.details.dgn	DRAWN - CAD	REVISED -						8012	21(W-3, TS-1, RS-7)	SANGAMON	679	470
	PLOT SCALE = 40.0000' / in.	CHECKED -	REVISED -		CONTRACT NO. 72890								
	PLOT DATE = Feb-04-2014 01:49:50PM	DATE - 1/24/02	REVISED -		SCALE:	SHEET	OF SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT			