


**NOTES**

1. FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
2. UNIT DUCT, 600V, 4-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
3. UNIT DUCT, 600V, 8-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/2" DIA. POLYETHYLENE.
4. POLE SET-BACK SHALL BE MEASURED FROM THE BACK OF THE CURB TO THE CENTER OF THE POLE/BASE.
5. UNIT DUCT, 600V, 4-1C NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
6. CONDUIT SHALL BE INSTALLED PUSHED.
7. POLE SHALL BE WIRED TO CITY OF NAPERVILLE CONTROLLER.
8. BOLT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE RE-INSTALLED POLE.

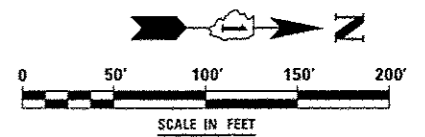

	DESIGNED <i>MCP</i>	REVISED - ADDENDUM A 02/22/2013	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>LIGHTING PLANS - ILLINOIS ROUTE 59</b>	F.A.P. RTE. 338	SECTION (112 & 113) WRS-6	COUNTY DUPAGE	TOTAL SHEETS 734	SHEET NO. 478
	DRAWN <i>MLB</i>	REVISED -		SCALE: AS SHOWN	SHEET NO. 2 OF 8 SHEETS	STA.	TO STA.	CONTRACT NO. 60R31	
	CHECKED <i>MCP</i>	REVISED -		ILLINOIS FED. AID PROJECT					
	DATE <i>03/07/2012</i>	REVISED -							