



STATION 1615+42.7 TO STATION 1648+97.87

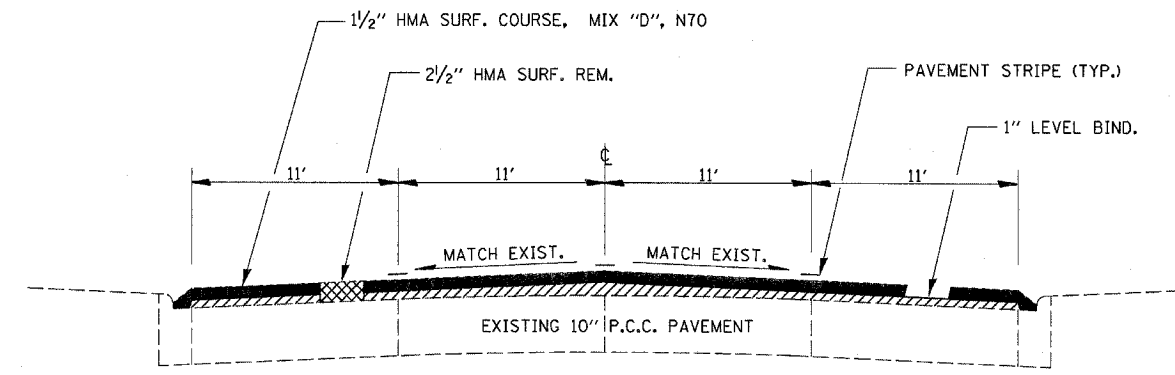


STATION 35+00 TO STATION 113+74

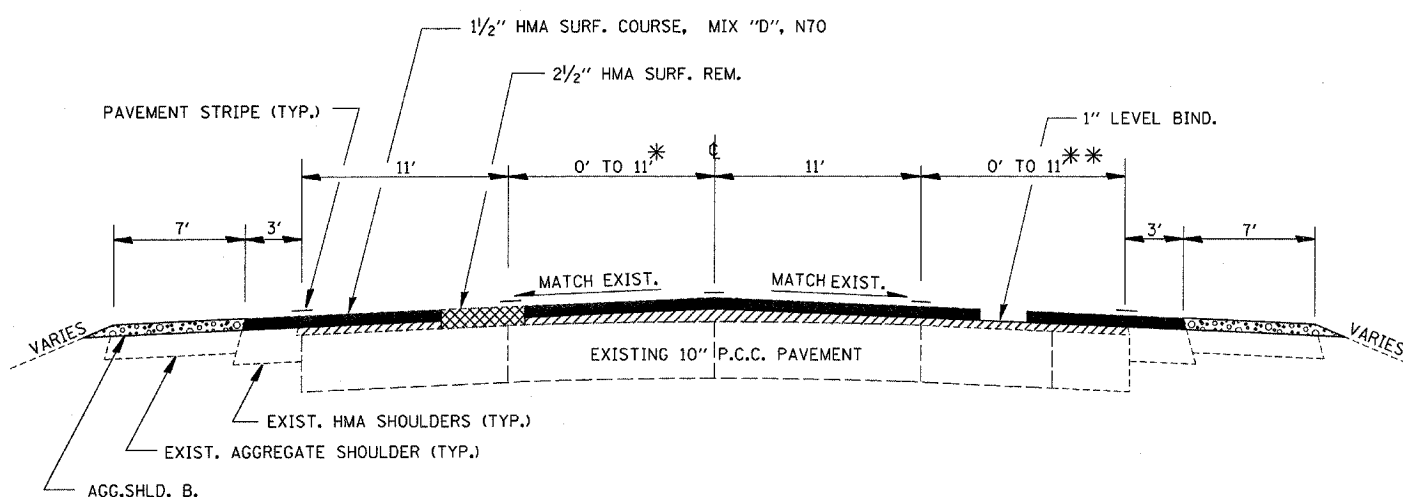

STATION 0+99 TO STATION 35+00

\* VARIES STA. 2+27 TO 6+17  
 \*\* VARIES STA. 2+27 TO 4+37

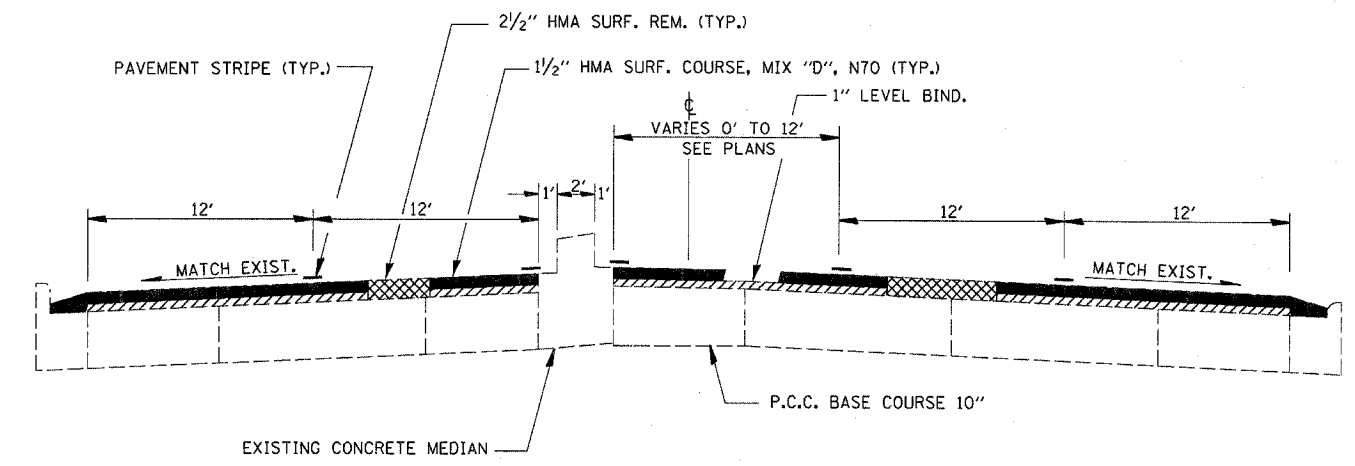

STATION 113+74 TO STATION 136+40

MIX DESIGN						
MIX	PG GRADE	MAX % RAP ALLOWABLE*	DESIGN AIR VOIDS	MIX COMPOSITION	FRICITION AGG	DENSITY CONTROL
HOT-MIX ASPHALT SURFACE COURSE	PG 64-22	10%	4.0% @N70	IL 12.5 OR IL 9.5	MIXTURE D	CORRELATION
LEVELING BINDER	PG 64-22	15%	4.0% @N70	IL 9.5		SATISFACTION OF ENGINEER

\* IF RAP PERCENTAGE IS DIFFERENT THAN LISTED ABOVE, THE PG GRADE MAY NEED TO BE ADJUSTED. THIS WILL BE DETERMINED BY THE ENGINEER.

OMISSIONS  
 RR - STA. 57+42.9 TO STA. 57+63.2  
 RR - STA. 1648+97.87 TO 1649+06.33  
 SN 050-0033 - 146+24.63 TO STA. 150+02.79

STATION EQUATIONS  
 1649+06.33 BK = 0+99 AH  
 67+18 BK = 103+41 AH  
 113+35 BK = 113+74 AH  
 145+75.5 = 145+75 AH