


ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
T.R. 54	02-09118-00-BR	FAYETTE	14	2
FED. ROAD DIST. NO.	ILLINOIS PROJECT		CONTRACT NO. 95429	

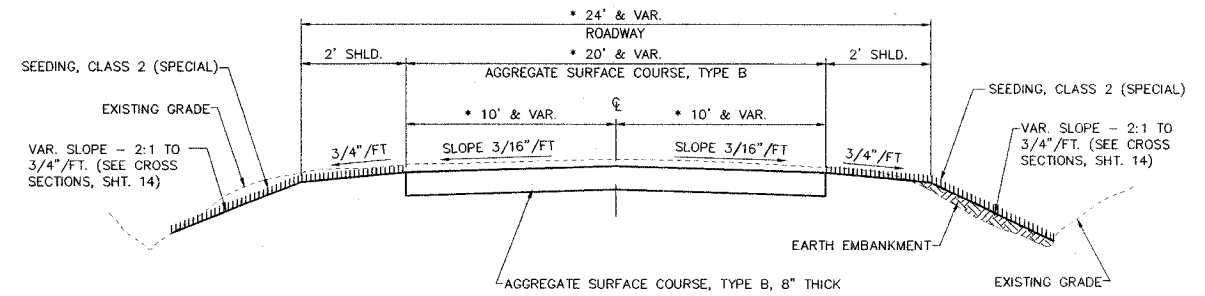

TYPICAL CROSS-SECTION (TRANSITION)

- * 24' & VAR. ROADWAY
- * 20' & VAR. AGGREGATE SURFACE COURSE, TYPE B
- * 10' & VAR. SLOPE 3/16"/FT
- * 10' & VAR. SLOPE 3/16"/FT
- * TRANSITION FROM 13' EXISTING TO 20' PROPOSED PAVEMENT, STA. 49+00 TO STA. 49+59.25
- * TRANSITION FROM 20' PROPOSED TO 12' EXISTING PAVEMENT, STA. 50+40.75 TO STA. 51+00

GENERAL NOTES

1. THIS SECTION SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE PLANS, THE SPECIAL PROVISIONS AND THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" ADOPTED JANUARY 1, 2002.
2. IF SECTION OR SUBSECTION MONUMENTS ARE ENCOUNTERED, THE ENGINEER SHALL BE NOTIFIED BEFORE SUCH MONUMENTS ARE REMOVED. THE CONTRACTOR SHALL PROTECT AND CAREFULLY PRESERVE ALL PROPERTY MARKERS AND MONUMENTS UNTIL OWNER, AN AUTHORIZED SURVEYOR OR AGENT HAS WITNESSED OR OTHERWISE REFERENCED THEIR LOCATION.
3. ALL EXISTING SIGNS AND SIGN POSTS SHALL BE SALVAGED TO THE COUNTY.
4. THE SHRINKAGE FACTOR FOR EMBANKMENT IS 25%.
5. ALL CLEARING AND GRUBBING IS TO BE INCLUDED IN THE UNIT PRICE BID FOR EARTH EXCAVATION.
6. BITUMINOUS SURFACE TREATMENT (A-2) WILL BE COMPLETED BY THE OWNER.

SUMMARY OF QUANTITIES

X080-2A

CODE NO.	ITEM	QUANTITY	UNIT
20200100	EARTH EXCAVATION	91	CU. YD.
20300100	CHANNEL EXCAVATION	307	CU. YD.
25001000	SEEDING, CLASS 2 (SPECIAL)	0.03	ACRE
28000300	TEMPORARY DITCH CHECKS	2	EACH
28100807	STONE DUMPED RIPRAP, CLASS A4	145	TON
40200800	AGGREGATE SURFACE COURSE, TYPE B	92	TON
50100100	REMOVAL OF EXISTING STRUCTURES	1	EACH
50300225	CONCRETE STRUCTURES	28.6	CU. YD.
50400305	PRECAST PRESTRESSED CONCRETE DECK BEAMS (17" DEPTH)	1920	SQ. FT.
50800105	REINFORCEMENT BARS	3040	POUND
50900205	STEEL RAILING, TYPE S1	160	FOOT
51201400	FURNISHING STEEL PILES HP 10x42	711	FOOT
51202700	DRIVING STEEL PILES	711	FOOT
51203400	TEST PILE STEEL HP 10x42	1	EACH
51204315	CONCRETE ENCASEMENT	9.4	CU. YD.
51500100	NAME PLATES	1	EACH