
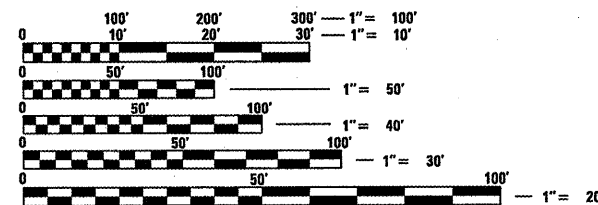


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PROPOSED
HIGHWAY PLANS

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE	29	1
		ILLINOIS	CONTRACT NO. 60T60	

FOR INDEX OF SHEETS, SEE SHEET NO. 2

VARIOUS ROUTES
SECTION: 2012-014 RS
VARIOUS LOCATIONS IN KANE COUNTY
INTERMITTENT RESURFACING
KANE COUNTY
C-91-398-12

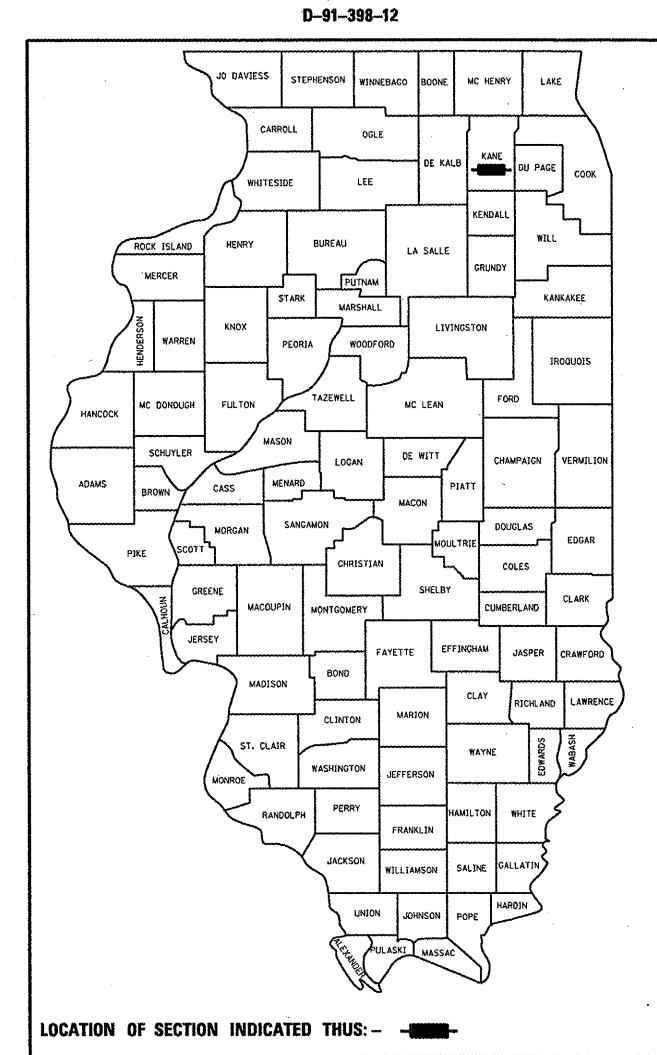

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

PROJECT ENGINEER: DANIEL WILGREEN (847) 705-4240
 PROJECT MANAGER: KEN ENG (847) 705-4247

CONTRACT NO. 60T60

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS

SUBMITTED April 5 20 12
Diane O'Keefe
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

May 11 20 12
Blund D. Baumann, P.E.
 acting ENGINEER OF DESIGN AND ENVIRONMENT

May 11 20 12
William R. Freyer
 acting DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

STATE STANDARDS

GENERAL NOTES

SHEET NO.	DESCRIPTION	STANDARD NO.	DESCRIPTION
1	TITLE SHEET	000001 - 06	TYPICAL SYMBOLS, ABBREVIATIONS AND PATTERNS
2	INDEX OF SHEETS, STATE STANDARDS AND GENERAL NOTES	701011 - 02	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
3	SUMMARY OF QUANTITIES	701301 - 04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
4	GENERAL LOCATION MAP	701306 - 03	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS - DAY ONLY
5	ROUTE INFORMATION	701311 - 03	LANE CLOSURE 2L, 2W MOVING OPERATIONS - DAY ONLY
6	SUMMARY OF PATCHING SCHEDULE	701336 - 06	LANE CLOSURE, 2L, 2W, WORK AREAS IN SERIES
7-20	PATCHING SCHEDULE	701421 - 04	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS ≥ 45 MPH TO 55 MPH
21	BUTT JOINT AND HMA TAPER DETAILS (BD-32)	701426 - 04	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS
22	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS AND DRIVEWAYS (TC-10)	701427	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPER., FOR SPEEDS ≤ 40 MPH
23	TYPICAL APPLICATIONS: RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) (TC-11)	701501 - 06	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
24	DISTRICT ONE TYPICAL PAVEMENT MARKINGS (TC-13)	701502 - 04	URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE
25	TRAFFIC CONTROL AND PROTECTION OF TURN BAYS (TO REMAIN OPEN TO TRAFFIC) (TC-14)	701601 - 07	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
26	PAVEMENT MARKING LETTERS AND SYMBOLS FOR TRAFFIC STAGING (TC-16)	701602 - 05	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
27	ARTERIAL ROAD INFORMATION SIGN (TC-22)	701606 - 08	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
28	STANDARD TRAFFIC SIGNAL DESIGN DETAILS (TS-05, SHEET 1 OF 6)	701701 - 08	URBAN LANE CLOSURE, MULTILANE INTERSECTION
29	DETECTOR LOOP INSTALLATION DETAIL FOR ROADWAY RESURFACING (TS-07)	701901 - 02	TRAFFIC CONTROL DEVICES

BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT (800) 892-0123 OR 811 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS FACILITIES. (48 HOUR NOTIFICATION REQUIRED)

THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE (OR TOLLWAY) PROPERTY WITHOUT WRITTEN PERMISSION FROM THE DEPARTMENT (OR ISTHA)

ANY PAVEMENT MARKINGS AND RAISED REFLECTIVE PAVEMENT MARKERS OBLITERATED BY MILLING AND RESURFACING OPERATIONS ON SIDE STREETS AND ENTRANCES SHALL BE REPLACED AND PAID FOR IN KIND.

BEFORE BEGINNING ANY WORK, THE CONTRACTOR SHALL RETAIN AND RECORD FOR FUTURE REFERENCE, ALL EXISTING PAVEMENT MARKING LINES (AND RAISED REFLECTIVE PAVEMENT MARKERS) IN ORDER THAT THESE LOCATIONS CAN BE RE-ESTABLISHED FOR STRIPING. EXACT LOCATIONS OF ALL PAVEMENT MARKINGS SHALL BE AS DIRECTED BY THE ENGINEER.

ALL PAVEMENT PATCHING LOCATIONS WILL BE DETERMINED IN THE FIELD BY THE ENGINEER.

THE CONTRACTOR SHALL CONTACT THE DISTRICT ONE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.

THE ENGINEER SHALL CONTACT MR. DON CHIARUGI, AREA TRAFFIC FIELD ENGINEER AT (847) 741-9857 MINIMUM OF TWO (2) WEEKS PRIOR TO PLACEMENT OF PERMANENT PAVEMENT MARKINGS.

DOUBLE LANE MARKERS ARE TO BE USED AS SHOWN ON THE DISTRICT ONE DETAIL "TYPICAL APPLICATIONS - RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)" SHOWN IN THE PLANS.

THE EXISTING ROADWAY TYPICAL SECTION IS ASSUMED TO HAVE A 3 INCH HOT-MIX ASPHALT OVERLAY ON TOP OF A TEN INCH CONCRETE BASE.

ALL PAVEMENT PATCHES SHOWN IN THE PLANS ARE TWO (2) INCH MILL AND RESURFACE ONLY. THE MINIMUM WIDTH FOR MILLING AND PATCHING SHALL BE THREE (3) FEET.

NO PATCHING OR RESURFACING IS TO BE DONE WITHIN FIFTY (50) FEET OF ANY RAILROAD CROSSING.

PAVEMENT MARKING TAPE, TYPE III SHALL BE USED FOR SHORT TERM PAVEMENT MARKINGS ON ALL FINAL SURFACES. THE COST OF THE PAVEMENT MARKING TAPE, TYPE III SHALL BE INCLUDED IN THE COST OF SHORT TERM PAVEMENT MARKING

THE COST OF TRAFFIC CONTROL AND PROTECTION FOR THE PROJECT SHALL BE INCLUDED IN THE COST OF THE ASSOCIATED ROAD WORK.

THE COST OF ANY PARTIAL OR FULL DEPTH PATCHING REQUIRED AFTER THE REMOVAL OF THE EXISTING 2 INCH HOT-MIX ASPHALT SURFACE SHALL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.

ANY DETECTOR LOOPS DAMAGED BY MILLING SHALL BE REPLACED IN KIND. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO QUANTIFY LOOP REPLACEMENTS NEEDED AND PROVIDE THE RESIDENT ENGINEER THIS INFORMATION PRIOR TO GRINDING OR REMOVAL.

ALL LOOP DETECTOR LOCATIONS SHALL BE CURB MARKED BY THE CONTRACTOR PRIOR TO MILLING FOR THE PURPOSE OF REESTABLISHING DETECTOR LOOP LAYOUT AFTER THE RESURFACING IS COMPLETED.

WHEN MILLED PAVEMENT IS OPEN TO TRAFFIC, THE MAXIMUM GRADE DIFFERENTIAL BETWEEN PASSES OF THE MILLING MACHINE SHALL NOT EXCEED 1 1/2 INCHES (40MM) WHERE THE SPEED LIMIT IS 45 MPH (80 KM/H) OR LESS AND 1 INCH (25 MM) WHERE THE SPEED LIMIT IS GREATER THAN 45 MPH (80 KM/H), WITH WRITTEN APPROVAL FROM THE RESIDENT ENGINEER. A MAXIMUM GRADE DIFFERENTIAL OF 3 INCHES (75 MM) MAY BE ALLOWED IF THE EDGE OF THE MILLING IS SLOPED A MINIMUM OF 1:3 (V:H).

OVERNIGHT LANE CLOSURES SHALL NOT BE ALLOWED FOR REHABILITATION PROJECTS INVOLVING DAYTIME MILLING AND RESURFACING OPERATIONS AND CLASS D PATCHING UNLESS OTHER CONDITIONS WARRANT EXTENDED LANE CLOSURES AS DETERMINED AND APPROVED IN WRITING BY THE ENGINEER OR AS PROVIDED FOR IN THE CONTRACT SPECIFICATIONS. ANY MILLED PAVEMENT IS TO BE RESURFACED BY THE END OF EACH DAY AND OPEN TO TRAFFIC.


HOT-MIX ASPHALT MIXTURE REQUIREMENTS	
MIXTURE TYPE	AIR VOIDS (%) @ N _{DES.}
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (IL 9.5MM), 2"	4% @ 70 GYR

THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SY/IN.

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76 -22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64 -22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

FILE NAME *	USER NAME = pencepl	DESIGNED -	REVISED - PLP 04/30/2012	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, STATE STANDARDS AND GENERAL NOTES	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
c:\pwork\pwt\dot\pencepl\d0303651\013912-Design.dgn	DRAWN -	REVISED -	VAR.			2012-014 R5	KANE	29	2		
PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -	CONTRACT NO. 60160								
PLOT DATE = 4/30/2012	DATE -	REVISED -	ILLINOIS FED. AID PROJECT								
						SCALE:	SHEET	OF	SHEETS	STA.	TO STA.

SUMMARY OF QUANTITIES			URBAN	CONSTRUCTION TYPE CODE					SUMMARY OF QUANTITIES			URBAN	CONSTRUCTION TYPE CODE				
CODE NO	ITEM	UNIT	TOTAL QUANTITIES	100% STATE 0005					CODE NO	ITEM	UNIT	TOTAL QUANTITIES	100% STATE 0005				
40600200	BITUMINOUS MATERIALS (PRIME COAT)	TON	18	18					* 78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	11000	11000				
40600300	AGGREGATE (PRIME COAT)	TON	86	86					* 78000500	THERMOPLASTIC PAVEMENT MARKING - LINE 8"	FOOT	300	300				
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	65	65					* 78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	300	300				
40600895	CONSTRUCTING TEST STRIP	EACH	1	1					* 78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 2-4"	FOOT	1050	1050				
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SO YD	1286	1286					* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	832	832				
40603340	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70	TON	4802	4802					78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	832	832				
44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SO YD	42868	42868					* 88600600	DETECTOR LOOP REPLACEMENT	FOOT	3122	3122				
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	6	6					Z0030850	TEMPORARY INFORMATION SIGNING	SO FT	257	257				
67100100	MOBILIZATION	L SUM	1	1													
70300100	SHORT TERM PAVEMENT MARKING	FOOT	4955	4955													
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SO FT	1652	1652													
* 78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SO FT	100	100													
* 78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	43501	43501													
									* SPECIALTY ITEM								

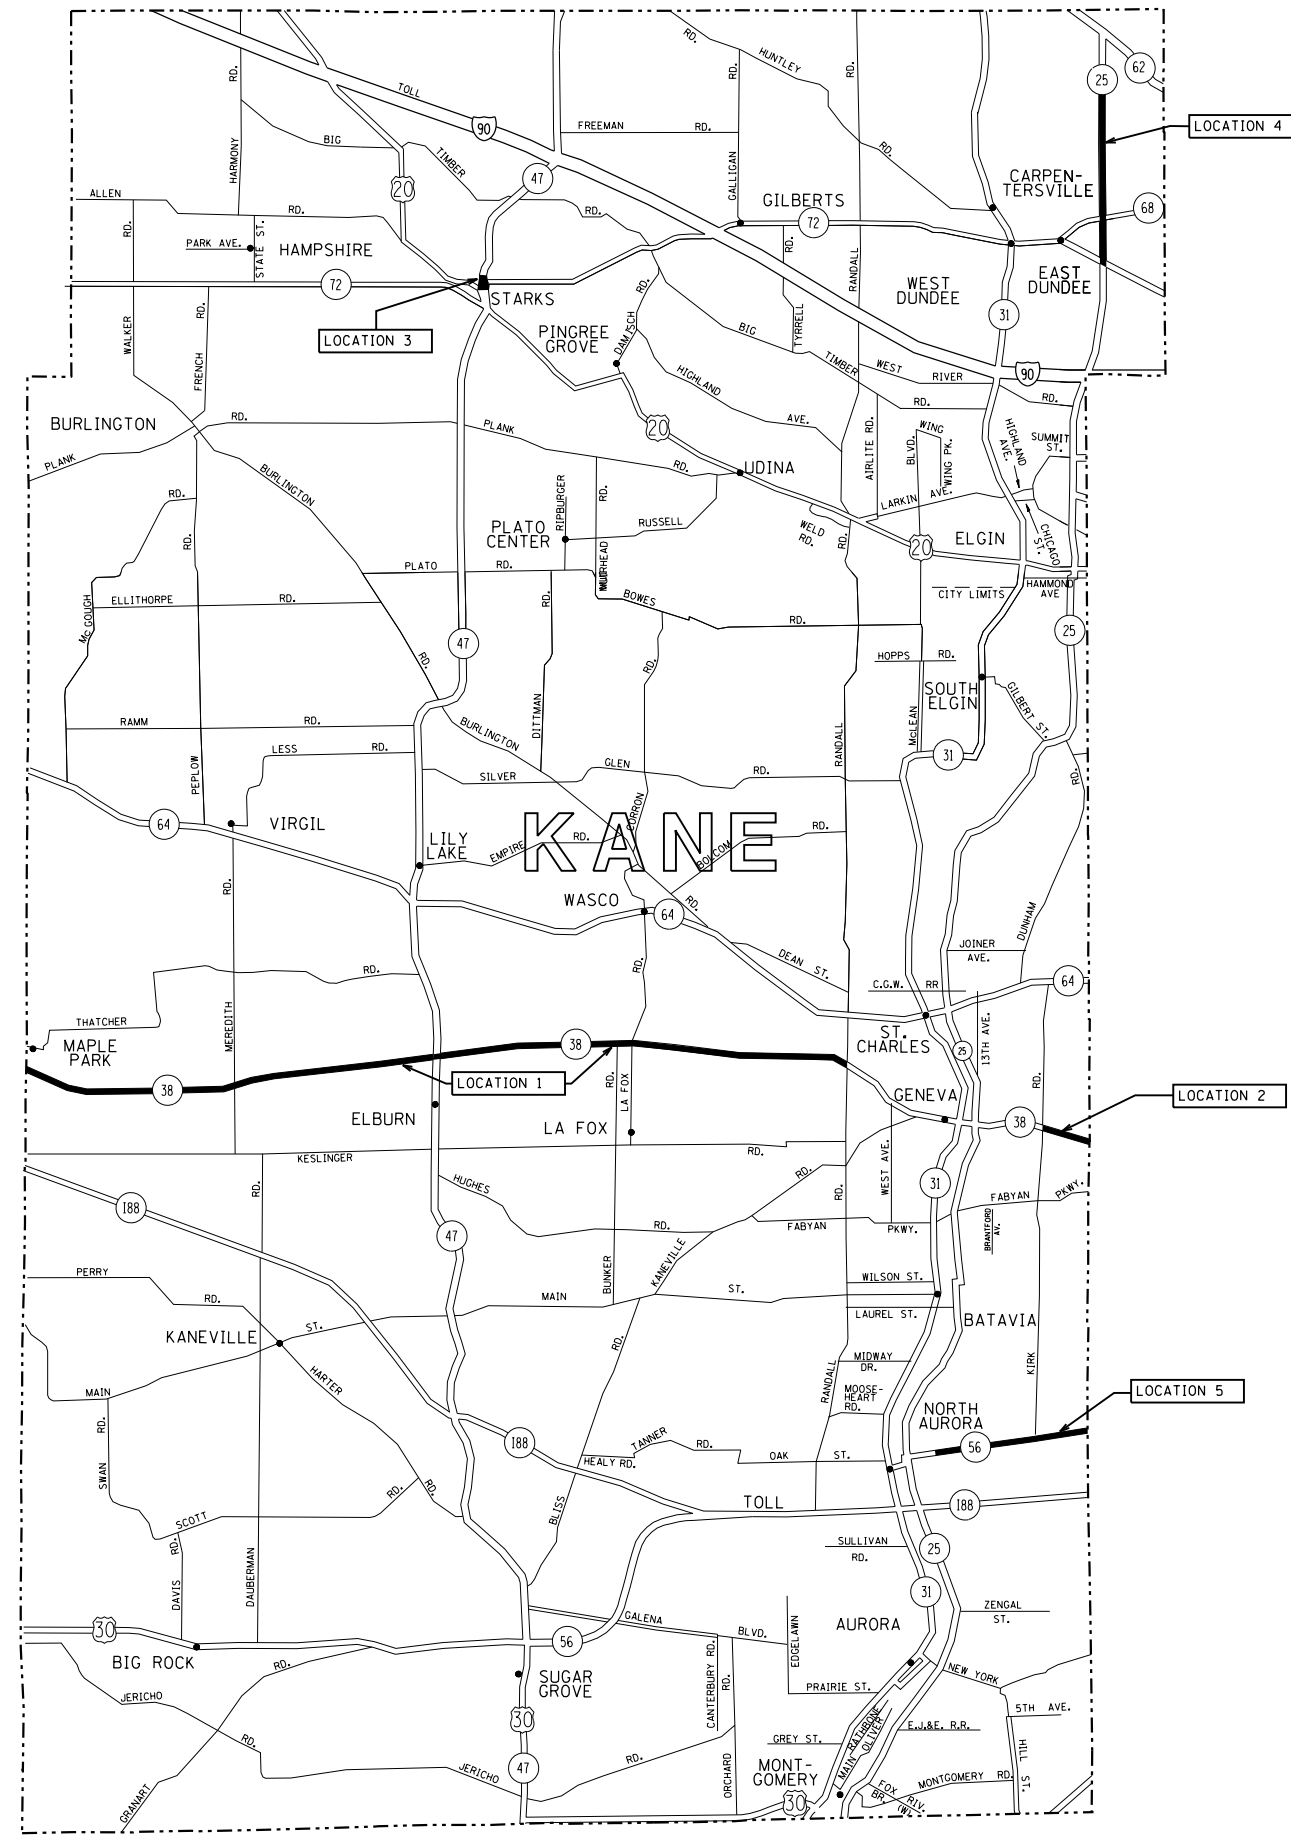

FILE NAME =	USER NAME = chrzesl-r	DESIGNED -	REVISED -
c:\pwwork\pwwork\chrzesl-r\d030365\1\013\812-Design.dgn		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

GENERAL LOCATION MAP			
SCALE:	SHEET	OF SHEETS	STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 R5	KANE	29	4
CONTRACT NO. 60T60			ILLINOIS FED. AID PROJECT	

	SUMMARY - KANE COUNTY ROUTES	MUNICIPALITIES	SPEED LIMIT	ADT (YEAR)
LOC. 1	IL 38 (RANDALL RD. TO KANE COUNTY LINE)	ELBURN, ST. CHARLES, CAMPTON TWP., ST. CHARLES TWP.	35-55 MPH	15,600 (2011)
LOC. 2	IL 38 (KIRK RD. TO KAUTZ RD.)	WEST CHICAGO, GENEVA, GENEVA TWP.	45-50 MPH	33,600 (2011)
LOC. 3	US 20/IL 47/IL 72 AT NORTH INTERSECTION	PINGREE GROVE	45-55 MPH	9,600 (2011)
LOC. 4	IL 25 (IL 72 TO BOLZ RD.)	EAST DUNDEE, CARPENTERSVILLE, BARRINGTON HILLS	45 MPH	27,200 (2011)
LOC. 5	IL 56 (HART RD./MITCHELL RD. TO EJ&E RAILROAD)	NORTH AURORA, AURORA, WARRENVILLE, WINFIELD TWP.	50-55 MPH	16,700 (2011)

SUMMARY - KANE COUNTY ROUTES		HMA 2" MILL & RESURFACE (SY)
LOC. 1	IL 38 (RANDALL RD. TO KANE COUNTY LINE)	24235
LOC. 2	IL 38 (KIRK RD. TO KAUTZ RD.)	800
LOC. 3	US 20/IL 47/IL 72 AT NORTH INTERSECTION	4000
LOC. 4	IL 25 (IL 72 TO BOLZ RD.)	12908
LOC. 5	IL 56 (HART RD./MITCHELL RD. TO EJ&E RAILROAD)	925
KANE COUNTY TOTAL =		42868
		SY

FILE NAME =	USER NAME = chrzesclr	DESIGNED -	REVISED -
ct:\pwork\pwork\chrzesclr\030365\1\013\012-Design.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / 1in.	CHECKED -	REVISED -
	PLOT DATE = 4/6/2012	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF PATCHING SCHEDULE

SHEET OF SHEETS STA. TO STA.

F.A. - RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE	29	6
CONTRACT NO. 60T60				
ILLINOIS FED. AID PROJECT				

ROUTE: IL 38 (Randall Rd. to Kane County Line)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
East of Randall Rd.		WB	1	12	40	480	53
		WB	C/L	40	4	160	18
		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	12	144	16
		WB	1(JT,LT)	4	150	600	67
		WB	1	12	25	300	33
		WB	1	12	15	180	20
		WB	1	12	8	96	11
		EB	2	12	100	1200	133
		EB	2(JT)	4	100	400	44
		EB	LT	12	20	240	27
		EB	2	12	120	1440	160
		EB	1	12	20	240	27
		EB	1	12	6	72	8
		EB	1	12	8	96	11
		EB	LT	12	8	96	11
		EB	1	12	10	120	13
		EB	1	12	6	72	8
		EB	LT	12	20	240	27
		EB	2	12	10	120	13
		EB	JT, LT, 1	4	50	200	22
		EB	2	12	75	900	100
		EB	2	12	6	72	8
		WB	2	12	6	72	8
		WB	12	12	120	1440	160
		WB	2	12	12	144	16
		WB	1	12	6	72	8
	Randall Rd.	WB	1	12	6	72	8
Randall Rd.		WB	2	15	15	225	25
		WB	1	12	15	180	20
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	30	360	40
		WB	2	12	25	300	33
		EB	1	12	30	360	40
		EB	1	12	20	240	27
		EB	2	12	200	2400	267
		EB	1	12	15	180	20
		EB	1	12	6	72	8
		EB	1	12	40	480	53
		EB	LT	12	10	120	13
		EB	JT, LT, 1	4	100	400	44
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	JT, LT, 1	4	200	800	89
		EB	2	12	20	240	27
		EB	2	12	75	900	100
		EB	2	12	15	180	20
		EB	2	12	15	180	20
	Peck Rd.	EB	2	12	80	960	107

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Randall Rd.		WB	2	12	30	360	40
		WB	2	12	75	900	100
		WB	LT	12	30	360	40
		WB	1	12	6	72	8
		WB	2	12	12	144	16
	Peck Rd.	WB	JT, LT, 1	4	60	240	27
Peck Rd.		WB	2	12	6	72	8
		WB	2	12	6	72	8
		WB	1	12	6	72	8
		WB	2	12	30	360	40
		WB	2	12	12	144	16
		WB	2	12	12	144	16
		WB	2	12	60	720	80
		WB	1	12	40	480	53
		WB	2	12	25	300	33
		WB	2	12	6	72	8
		WB	2	12	20	240	27
		WB	1(JT, LT)	4	600	2400	267
		WB		6	130	780	87
		EB	2	12	30	360	40
		EB	2	12	6	72	8
		EB	1	12	15	180	20
		EB	2	12	15	180	20
		EB	1	12	6	72	8
		EB	2	12	6	72	8
		EB	2	12	6	72	8
		EB	2	12	12	144	16
		EB	2	12	6	72	8
		EB	1	12	12	144	16
		EB	2	12	6	72	8
		EB	1(JT, LT)	4	500	2000	222
		EB	2	12	10	120	13
		EB	1	12	50	600	67
		EB	2	4	80	320	36
		EB	2	12	20	240	27
		EB	LT	12	20	240	27
		EB	2	4	60	240	27
		EB	1	12	30	360	40
		EB	1	12	8	96	11
		EB	2	12	6	72	8
		EB	2	12	6	72	8
		EB	2	12	6	72	8
		WB	2	12	6	72	8
		WB	2	12	20	240	27
		WB	2	12	6	72	8
		WB	1	12	20	240	27
		WB	2	12	6	72	8
		WB	2	12	6	72	8
		WB	2	12	6	72	8
		WB	1	12	30	360	40
	Brundige Rd.	WB	1	12	200	2400	267

Continued on next sheet

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WIDTH	LENGTH	(SQ FT)	(SQ YD)
Peck Rd.		WB	LT	12	30	360	40
		WB	2	12	80	960	107
		WB	2	12	6	72	8
		WB	RT	12	12	144	16
	Brundige Rd.	WB	1	12	6	72	8
Brunidge Rd.		WB	1	40	18	720	80
		EB	1	12	16	192	21
		C/L	1	12	100	1200	133
		WB	1	12	12	144	16
		EB	1	12	6	72	8
		MED	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		C/L	1	100	4	400	44
		JOINT	1	100	4	400	44
		RT	1	12	20	240	27
		WB	1	12	6	72	8
		JOINT	1	200	4	800	89
		EB	1	12	6	72	8
		EB	1	12	10	120	13
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	8	96	11
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		C/L	1	60	4	240	27
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		C/L	1	40	4	160	18
	Garfield	WB	1	12	6	72	8
Garfield		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	8	96	11
		C/L	1	60	4	240	27
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	8	96	11
		C/L	1	50	4	200	22
		C/L	1	10	4	40	4
		C/L	1	10	4	40	4
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	1	12	6	72	8
	LaFox Rd.	WB	1	12	6	72	8

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WIDTH	LENGTH	(SQ FT)	(SQ YD)
Garfield		C/L	1	100	4	400	44
		EB	1	12	10	120	13
		WB	1	12	10	120	13
		EB	1	12	6	72	8
		WB	1	12	12	144	16
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		C/L	1	40	4	160	18
		EB	1	12	14	168	19
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	6	72	8
	LaFox Rd.	C/L	1	100	4	400	44
LaFox Rd.		EB	1	12	15	180	20
		EB	1	12	6	72	8
		C/L	1	100	4	400	44
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		C/L	1	50	4	200	22
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		EB	1	12	8	96	11
		WB	1	12	6	72	8
		RT	1	12	6	72	8
	LaFox Rd.					0	0
		EB	1	12	150	1800	200
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		JOINT	1	300	4	1200	133
		LT.EB	1	50	6	300	33
		JOINT	1	60	4	240	27
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	EDGE	100	6	600	67
		WB	1	12	30	360	40
		WB	1	12	10	120	13
		WB	EDGE	300	6	1800	200
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		C/L	1	700	4	2800	311
	Beith Rd.	EB	1	12	6	72	8

Continued on next sheet

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
LaFox Rd.		WB	1	12	6	72	8
		WB	EDGE	300	6	1800	200
		WB	1	12	6	72	8
		C/L	1	100	4	400	44
		EB	1	12	6	72	8
		WB	1	12	20	240	27
		EB	1	12	6	72	8
	Beith Rd.	C/L	1	20	4	80	9
Beith Rd.		WB	1	12	12	144	16
		EB	1	12	6	72	8
		EB	EDGE	100	6	600	67
		WB	1	12	6	72	8
		EB	1	12	10	120	13
		WB	1	12	8	96	11
		WB	1	12	20	240	27
		C/L	1	200	4	800	89
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	6	72	8
		WB	1	12	8	96	11
		EB	EDGE	200	6	1200	133
		EB	1	12	12	144	16
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		C/L	1	200	4	800	89
		WB	1	12	10	120	13
		WB	1	12	12	144	16
		C/L	1	500	4	2000	222
		WB	1	12	6	72	8
		WB	1	12	20	240	27
		EB	EDGE	100	6	600	67
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		EB	1	12	50	600	67
		WB	1	12	10	120	13
		WB	1	12	15	180	20
		EB	1	12	30	360	40
	Hartley Rd.	EB	1	12	6	72	8
Hartley Rd.		EB	JOINT	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	20	240	27
		C/L	1	1500	4	6000	667
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	10	120	13
	Pouley Rd.	EB	1	12	6	72	8

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Hartley Rd.		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	EDGE	800	6	4800	533
		C/L	1	1500	4	6000	667
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
	Pouley Rd.	EB	1	12	6	72	8
Pouley Rd.		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	150	1800	200
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	8	96	11
		C/L	1	1000	4	4000	444
		EB	1	12	8	96	11
		WB	1	12	8	96	11
		EB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	20	240	27
		EB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		EB	1	12	10	120	13
		EB	1	12	15	180	20
		EB	1	12	8	96	11
	Anderson	WB	1	12	8	96	11

Continued on next sheet

FILE NAME = c:\pw\work\pwidot\chrzescr\d0303651\0131812-Design.dgn		USER NAME = chrzescr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PATCHING SCHEDULE IL 38			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 100.0000' / 111.		CHECKED -	REVISSED -	SCALE:		SHEET OF SHEETS	STA.	TO STA.	VAR.	2012-014 R5	KANE	29	9
PLOT DATE = 4/6/2012		DATE -	REVISSED -					CONTRACT NO. 60T60					
ILLINOIS FED. AID PROJECT													

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Pouley Rd.		EB	1	12	10	120	13
		WB	1	12	6	72	8
		EB	1	12	10	120	13
		WB	1	12	10	120	13
		EB	1	12	6	72	8
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	10	120	13
		WB	1	12	10	120	13
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	8	96	11
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	15	180	20
		WB	1	12	20	240	27
		EB	1	12	10	120	13
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	100	6	600	67
		EB	1	12	6	72	8
		EB	1	12	200	2400	267
		WB	1	12	200	2400	267
		C/L	1	500	4	2000	222
		WB	1	12	60	720	80
		WB	1	12	60	720	80
		LT	1	12	60	720	80
		EB	1	12	8	96	11
		EB	1	12	6	72	8
		RT	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	15	180	20
		EB	1	12	6	72	8
		WB	1	12	10	120	13
		EB	1	12	6	72	8
		EB	1	12	6	72	8
Anderson	Anderson	WB	1	12	6	72	8
		EB	1	12	8	96	11
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	8	96	11
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	10	120	13
	IL 47	WB	1	12	6	72	8

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB) (NB/SB)	NO. (1, 2, 3)	PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Anderson		WB	1	12	10	120	13
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	6	200	1200	133
		EB	1	6	200	1200	133
		WB	1	6	100	600	67
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	8	96	11
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	12	144	16
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
IL 47	IL 47	EB	1	12	6	72	8
		EB	1	6	300	1800	200
		WB	1	6	300	1800	200
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		EB	1	6	700	4200	467
		WB	1	6	700	4200	467
		WB	1	12	8	96	11
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	6	300	1800	200
		WB	1	6	300	1800	200
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
	Frances Rd	EB	1	12	6	72	8

Continued on next sheet

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WIDTH	LENGTH	(SQ FT)	(SQ YD)
IL 47		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
	Frances Rd	EB	1	6	100	600	67
Frances Rd		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	6	200	1200	133
		WB	1	6	200	1200	133
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	6	200	1200	133
		WB	1	6	200	1200	133
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	20	240	27
		WB	1	12	6	72	8
		WB	1	12	8	96	11
	Merridith Rd	EB	1	12	12	144	16
Merridith Rd		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		WB	1	12	20	240	27
		EB	1	6	150	900	100
		WB	1	6	150	900	100
		WB	1	12	6	72	8
		WB	1	12	6	72	8
		EB	1	12	25	300	33
		WB	1	12	15	180	20
		WB	1	12	15	180	20
		WB	1	12	15	180	20
		EB	1	6	100	600	67
		WB	1	12	20	240	27
		EB	1	12	6	72	8
		EB	1	6	300	1800	200
	County Line Rd	WB	1	6	300	1800	200
Merridith Rd		E	1	12	8	96	11
		W	1	12	20	240	27
		W	1	6	200	1200	133
		E	1	6	300	1800	200
		W	1	12	20	240	27
		E	1	6	100	600	67
	County Line Rd	W	1	6	100	600	67

ROUTE: IL 38 (Randall Rd. to Kane County Line) (Continued)							
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WIDTH	LENGTH	(SQ FT)	(SQ YD)
Merridith Rd		W	1	6	500	3000	333
		E	1	12	8	96	11
		E	1	12	6	72	8
		W	1	12	6	72	8
		E	1	6	300	1800	200
		W	1	12	6	72	8
		W	1	12	6	72	8
		W	1	12	100	1200	133
		W	1	12	12	144	16
		E	1	6	500	3000	333
		W	1	12	30	360	40
		W	1	12	10	120	13
		CL	1	4	500	2000	222
		W	1	12	6	72	8
		W	1	12	6	72	8
		W	1	12	20	240	27
		W	1	12	10	120	13
		E	1	6	300	1800	200
		W	1	6	500	3000	333
		W	1	12	6	72	8
		E	1	12	6	72	8
		E	1	6	300	1800	200
		W	1	6	300	1800	200
		E	1	12	12	144	16
		E	1	12	10	120	13
		E	1	12	10	120	13
		W	1	12	25	300	33
		E	1	12	20	240	27
		W	1	6	300	1800	200
		E	1	6	300	1800	200
		E	1	12	10	120	13
		W	1	12	10	120	13
		E	1	12	6	72	8
		W	1	12	6	72	8
		E	1	12	6	72	8
	County Line Rd	E	1	12	6	72	8
Additional Edge Patching (2") Throughout Project Limits (6' wide x 100' long minimum)						4200	
Locations to be determined in the field by the Engineer.							
TOTALS:						17736	24235
						FT	SY

ROUTE: IL 38 (Kirk Rd. to Kautz Rd.)							
CROSS STREET		DIRECTION (EB/WB) (NB/SB)	LANE NO. (1, 2, 3)	PAVEMENT		REPAIR	
FROM	TO			PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Kirk Rd.		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		WB	1	12	10	120	13
		WB	1	12	6	72	8
		WB	1	12	10	120	13
	Kautz Rd.	WB	1	12	10	120	13
Kirk Rd.		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
	Kautz Rd.	WB	2	12	10	120	13

ROUTE: IL 38 (Kirk Rd. to Kautz Rd.) (Continued)							
CROSS STREET		DIRECTION (EB/WB) (NB/SB)	LANE NO. (1, 2, 3)	PAVEMENT		REPAIR	
FROM	TO			PATCH WIDTH	PATCH LENGTH	AREA (SQ FT)	AREA (SQ YD)
Kirk Rd.		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	6	72	8
		WB	2	12	10	120	13
		WB	2	12	10	120	13
		WB	2	12	6	72	8
		WB	2	12	10	120	13
	Kautz Rd.	WB	2	12	10	120	13
Kirk Rd.		EB	1	12	10	120	13
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	10	120	13
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	8	96	11
		EB	1	12	6	72	8
		EB	1	12	8	96	11
		EB	1	12	8	96	11
	Kautz Rd.	EB	1	12	10	120	13
Kirk Rd.		EB	2	12	10	120	13
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	8	96	11
		EB	2	12	6	72	8
		EB	2	12	8	96	11
		EB	2	12	8	96	11
	Kautz Rd.	EB	2	12	10	120	13
		TOTALS:				600	800
						FT	SY

ROUTE: IL 25 (IL 72 to Bolz Rd.)		(Continued)					
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WDTH	LENGTH	(SQ FT)	(SQ YD)
ROBIN RD		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	8	96	11
		SB	2	12	8	96	11
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
	BERKLEY ST	SB				0	0
BERKLEY ST		SB	2	6	200	1200	133
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	30	360	40
		SB	1	12	20	240	27
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	20	240	27
		SB	2	12	20	240	27
		SB	RT	12	20	240	27
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	RT	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	10	120	13
		SB	2	12	20	240	27
		SB	RT	12	10	120	13
	HAZARD RD	SB				0	0
HAZARD RD		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
	TACO BELL	SB	1/2	12	500	6000	667

ROUTE: IL 25 (IL 72 to Bolz Rd.)		(Continued)					
CROSS STREET		DIRECTION	LANE	PAVEMENT	PAVEMENT	REPAIR	REPAIR
FROM	TO	(EB/WB)	NO.	PATCH	PATCH	AREA	AREA
		(NB/SB)	(1, 2, 3)	WIDTH	LENGTH	(SQ FT)	(SQ YD)
HAZARD RD		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	RT	12	6	72	8
		SB	LT	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	LT	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	RT	12	6	72	8
		SB	LT	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	LT	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	2	12	6	72	8
		SB	1/2	4	300	1200	133
	TACO BELL	SB				0	0
TACO BELL		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1	12	6	72	8
		SB	2	12	6	72	8
		SB	1/2	4	300	1200	133

Continued on next sheet


FILE NAME =	USER NAME = chrzescr	DESIGNED -	REVISED -
c:\pwork\pwork\chrzescr\d030365\1\013\012-Design.dgn		DRAWN -	REVISED -
		CHECKED -	REVISED -
PLOT SCALE = 100.0000' / in.		DATE -	REVISED -
PLOT DATE = 4/6/2012			

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


PATCHING SCHEDULE
IL 25

SCALE: SHEET OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 R5	KANE	29	16
CONTRACT NO. 60T60			ILLINOIS FED. AID PROJECT	

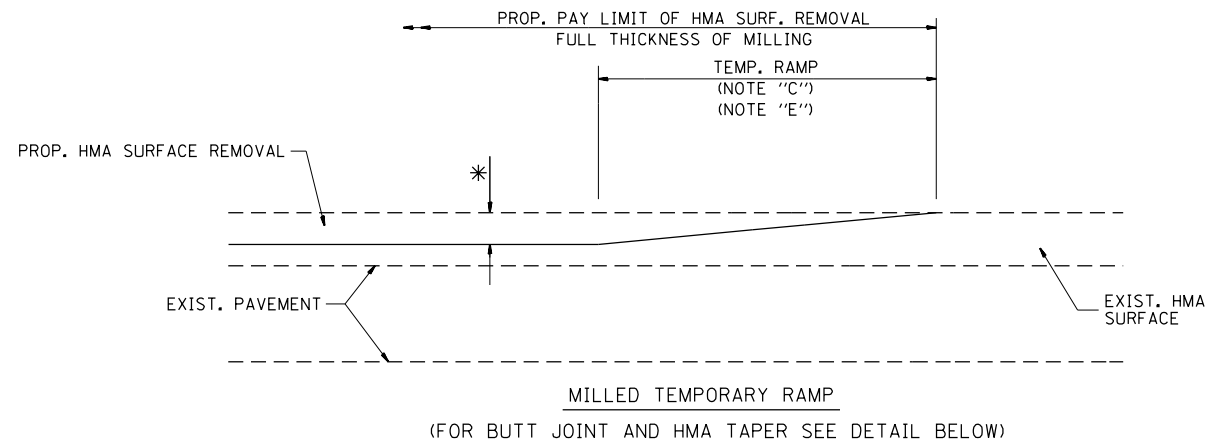


OPTION 1

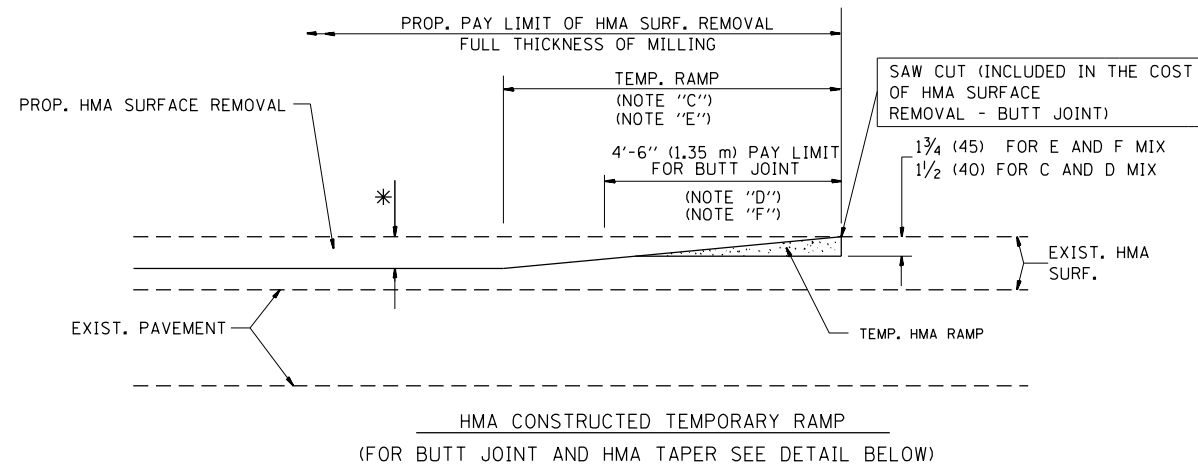


OPTION 2


TYPICAL TEMPORARY RAMP

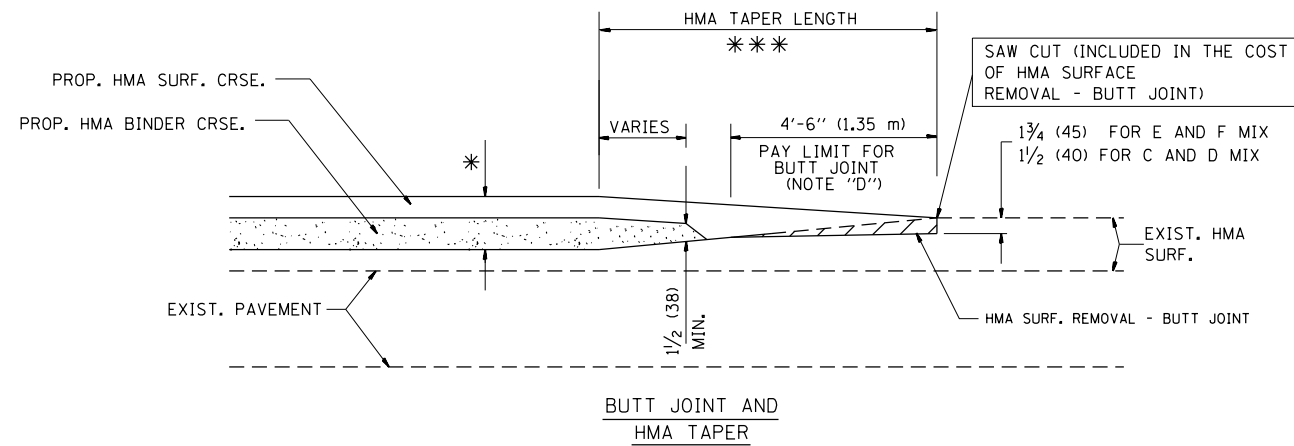

TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

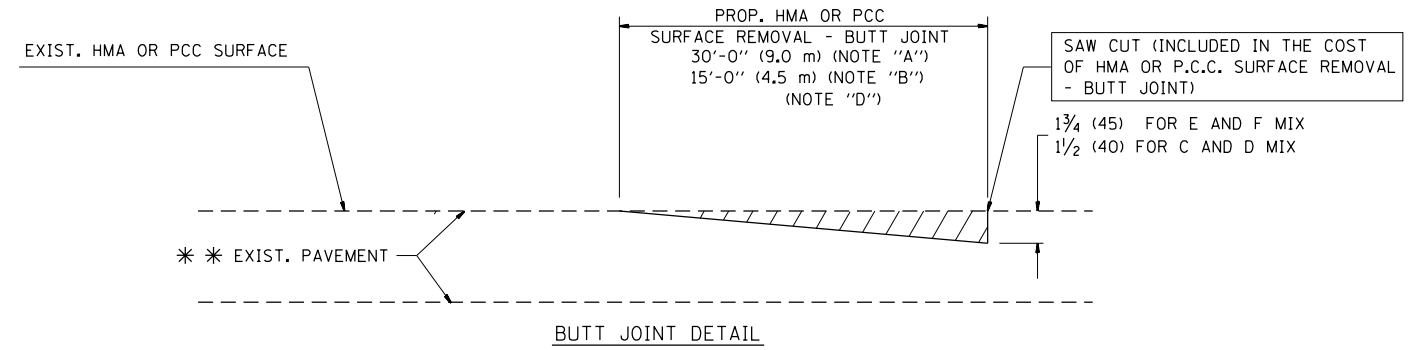

BUTT JOINT DETAIL

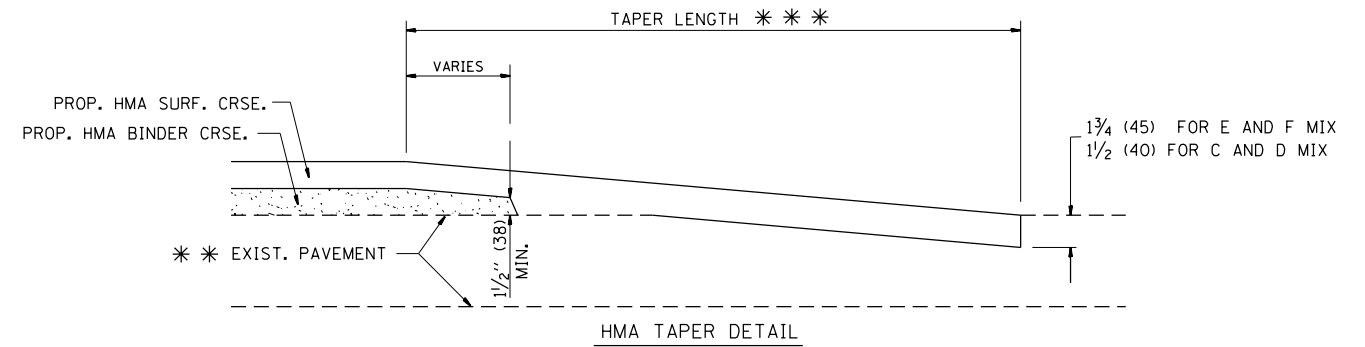

HMA TAPER DETAIL

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

*** PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
 - B: MINOR SIDE ROADS.
 - C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
 - D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
 - E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
 - F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
 - G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- *** 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A")
10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT".


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = chrzesclr	DESIGNED - M. DE YONG	REVISED - R. SHAH 10-25-94
et:\pw\work\p\id\chrzesclr\0303651\01s	Std.dgn	DRAWN -	REVISED - A. ABBAS 03-21-97
	PLOT SCALE = 100.0000' / 1in.	CHECKED -	REVISED - M. GOMEZ 04-06-01
	PLOT DATE = 4/6/2012	DATE - 06-13-90	REVISED - R. BORO 01-01-07

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BUTT JOINT AND HMA TAPER DETAILS	
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS
STA.	TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	21
BD400-05 BD32		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

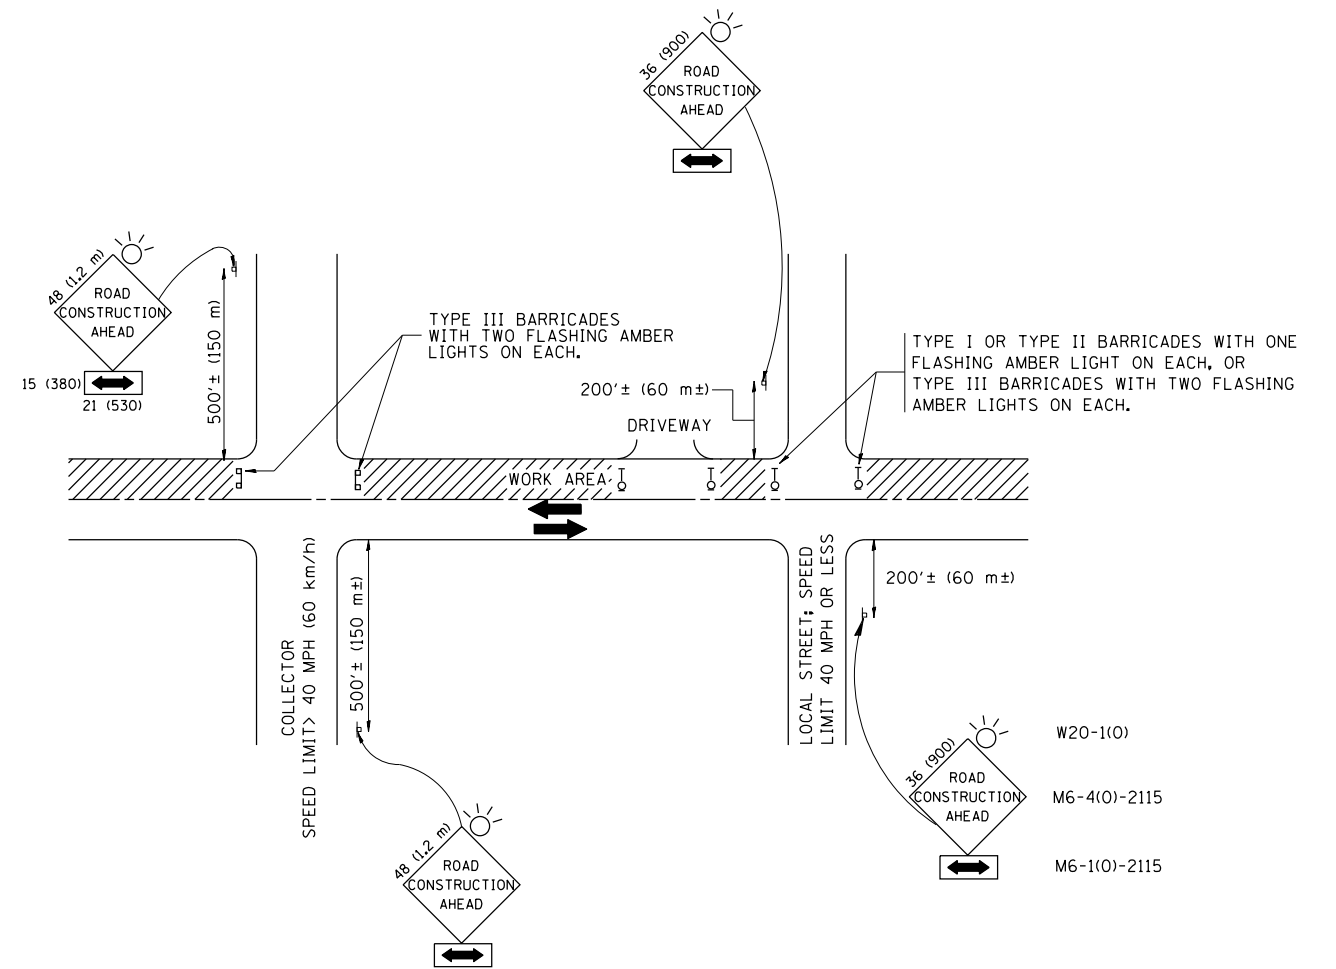

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

NOTES:

A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS

1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:

a) ONE ROAD CONSTRUCTION AHEAD SIGN 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.

b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION.

2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:

a) ONE ROAD CONSTRUCTION AHEAD SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.

b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.

3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (M6-4).

B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:

USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.

C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.

D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in millimeters (inches) unless otherwise shown.


FILE NAME =	USER NAME = chrzesclr	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95
et:\pwork\pwork\chrzesclr\d0303651\Dis	Std.dgn	DRAWN -	REVISED - A. HOUSEH 03-06-96
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED - A. HOUSEH 10-15-96
	PLOT DATE = 4/6/2012	DATE - 06-89	REVISED - T. RAMMACH 01-06-00

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL AND PROTECTION FOR
SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS


SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	22
TC-10			CONTRACT NO. 60T60	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

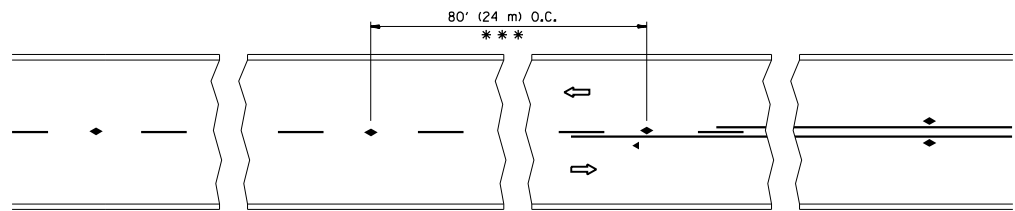


*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.


TWO-LANE/TWO-WAY

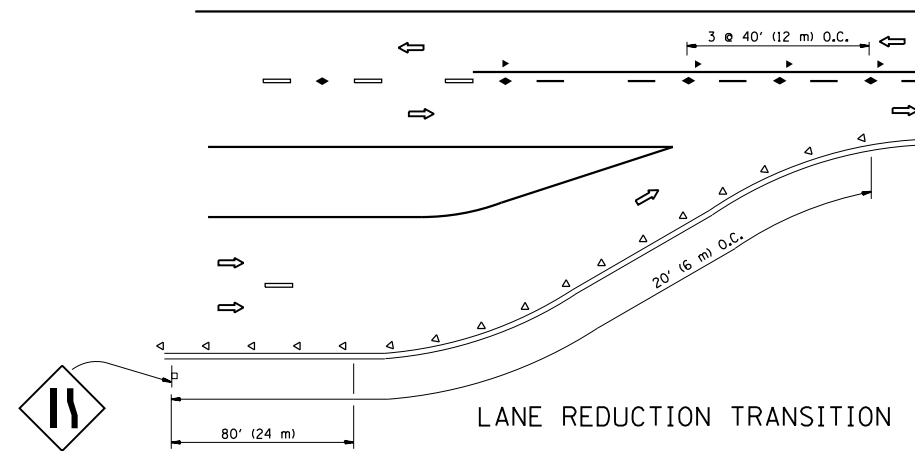


LANE REDUCTION TRANSITION

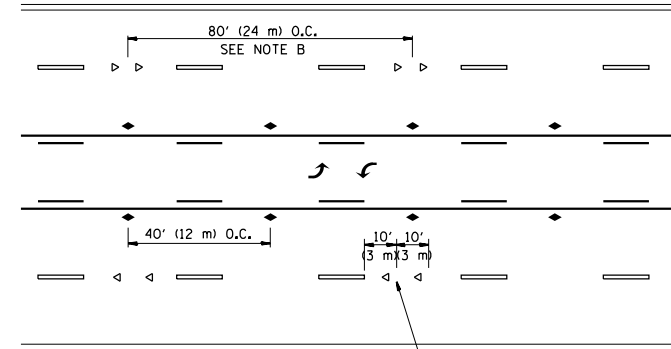

TWO-WAY LEFT TURN

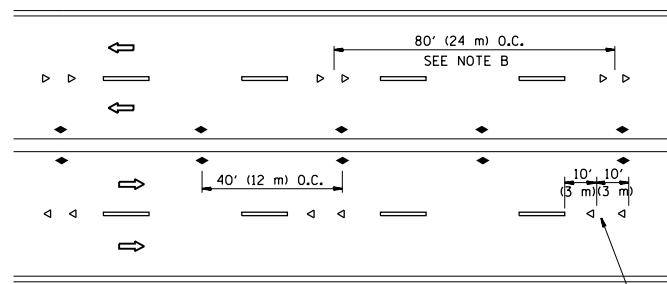

MULTI-LANE/UNDIVIDED

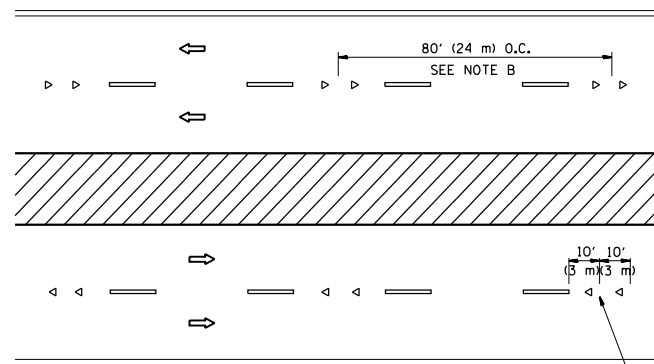

MULTI-LANE/DIVIDED

GENERAL NOTES

1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

SYMBOLS


- YELLOW STRIPE
- WHITE STRIPE
- ◀ ONE-WAY AMBER MARKER
- ◁ ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

DESIGN NOTES

1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHALL BE INCLUDED IN THE PLANS WHEN STANDARD SPECIFICATIONS ARE NOT BEING USED.
4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

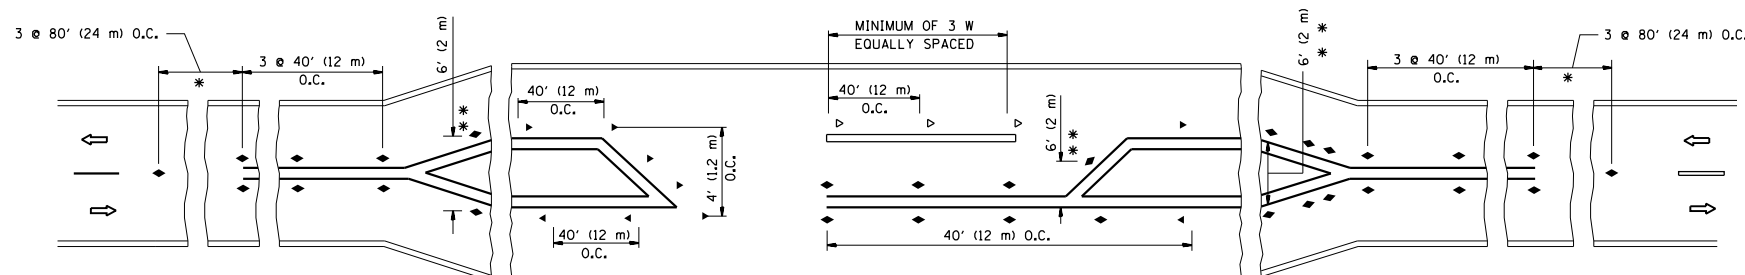

* SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE
 ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS USE TWO-WAY MARKERS.

LEFT TURN




All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = chrzesclr	DESIGNED -	REVISED - T. RAMMACHER 09-19-94
et:\pw\work\p\midot\chrzesclr\40303651\013	Std.dgn	DRAWN -	REVISED - T. RAMMACHER 03-12-99
	PLOT SCALE = 100.0000' / 1"	CHECKED -	REVISED - T. RAMMACHER 01-06-00
	PLOT DATE = 4/6/2012	DATE -	REVISED - C. JUCIUS 09-09-09

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION



TYPICAL APPLICATIONS			
RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)			
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	23
TC-11		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

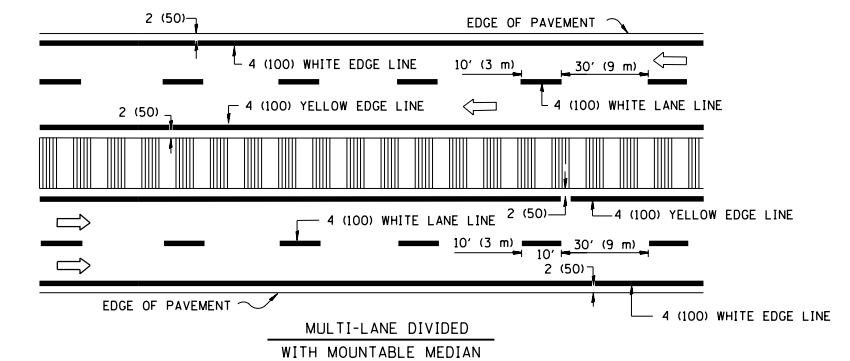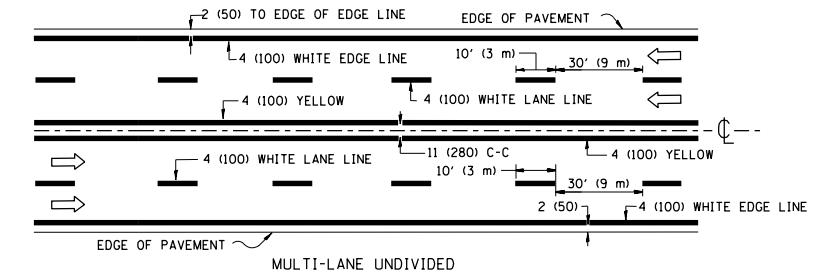
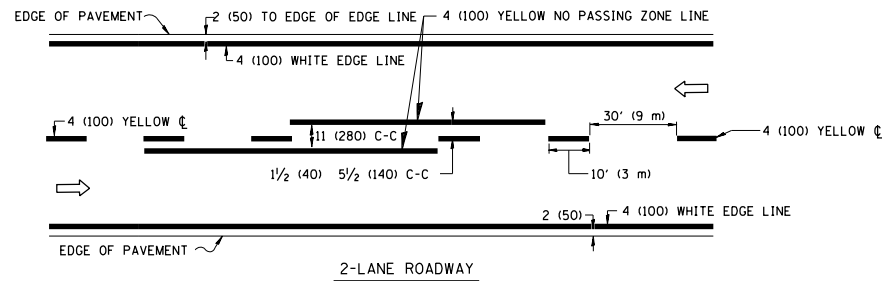


NOTE: MEDIANS WITH BARRIER CURB DO NOT REQUIRE AN EDGE LINE

TYPICAL LANE AND EDGE LINE MARKING

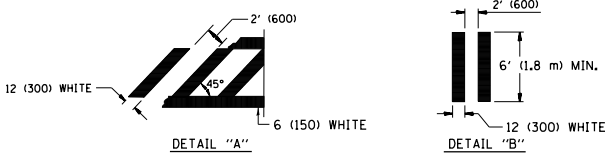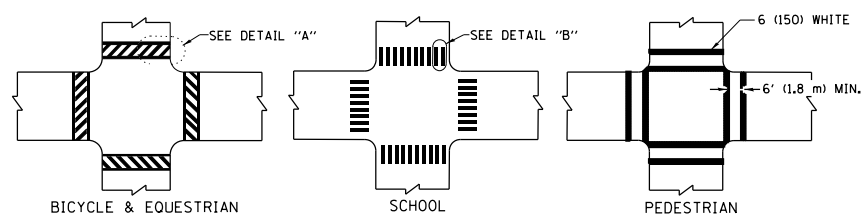


TYPICAL CROSSWALK MARKING

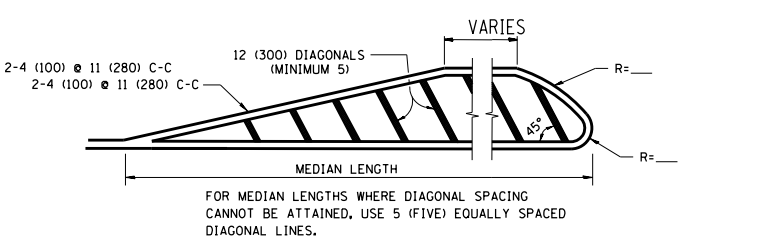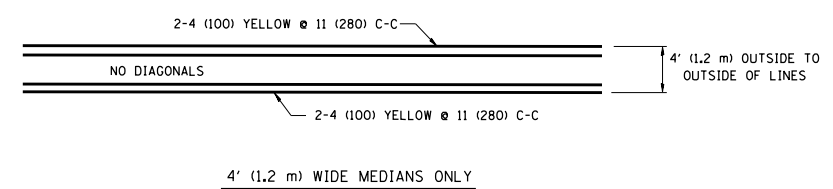


DIAGONAL LINE SPACING: 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))
75' (25 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)
150' (45 m) C-C (MORE THAN 45MPH (70 km/h))

MEDIANS OVER 4' (1.2 m) WIDE

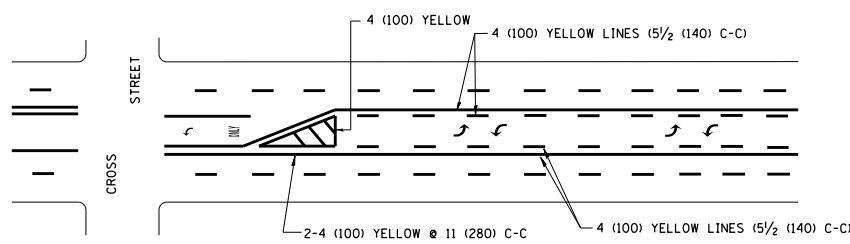


A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR. ADDITIONAL PAIRS SHALL BE PLACED AT 200' (60 m) TO 300' (90 m) INTERVALS.



MEDIAN WITH TWO-WAY LEFT TURN LANE

TYPICAL PAINTED MEDIAN MARKING


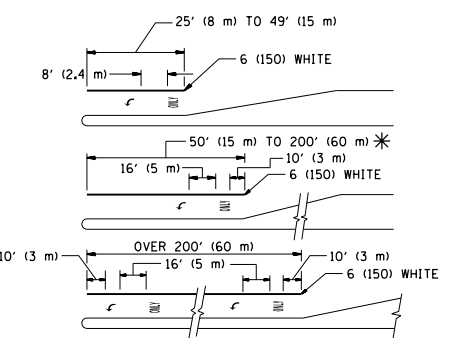


FULL SIZE LETTERS 8' (2.4 m) AND ARROWS SHALL BE USED.
AREA = 15.6 SQ. FT. (1.5 m²) ONLY AREA = 20.8 SQ. FT. (1.9 m²)

* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW - "ONLY".

TYPICAL LEFT (OR RIGHT) TURN LANE

TYPICAL TURN LANE MARKING

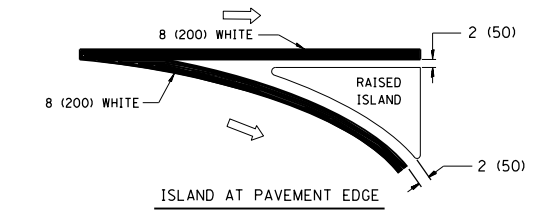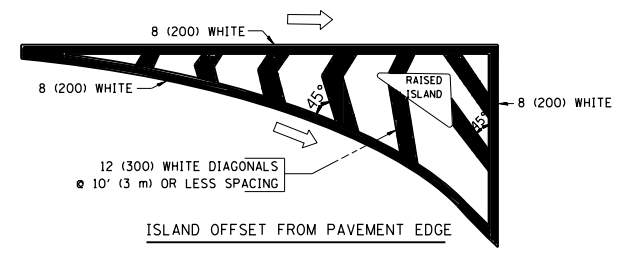

TYPICAL ISLAND MARKING

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / REMARKS
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE
CENTERLINE ON MULTI-LANE UNDIVIDED PAVEMENT	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C
NO PASSING ZONE LINES: FOR ONE DIRECTION	4 (100)	SOLID	YELLOW	5/2 (140) C-C FROM SKIP-DASH CENTERLINE
NO PASSING ZONE LINES: FOR BOTH DIRECTIONS	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	SAME AS LINE BEING EXTENDED	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
EDGE LINES	4 (100)	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MOUNTABLE MEDIANS IN YELLOW; EDGE LINES ARE NOT USED NEXT TO BARRIER CURB
TURN LANE MARKINGS	6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
TWO WAY LEFT TURN MARKING	2 @ 4 (100) EACH DIRECTION 8' (2.4m) LEFT ARROW	SKIP-DASH AND SOLID IN PAIRS	YELLOW WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5/2 (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE. SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 @ 6 (150) 12 (300) @ 45° 12 (300) @ 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1.2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT. OTHERWISE, PLACE AT DESIRED STOPPING POINT, PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
PAINTED MEDIANS	2 @ 4 (100) WITH 12 (300) DIAGONALS @ 45° NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS	SOLID	YELLOW; TWO WAY TRAFFIC WHITE; ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE. SEE TYPICAL PAINTED MEDIAN MARKING.
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIAGONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h) 30' (9 m) C-C (OVER 45MPH (70 km/h))
RAILROAD CROSSING	24 (600) TRANSVERSE LINES; "RR" 15 6' (1.8 m) LETTERS; 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R": 3.6 SQ. FT. (0.33 m ²) EACH "X": 54.0 SQ. FT. (5.0 m ²) EACH
SHOULDER DIAGONALS	12 (300) @ 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h)) 150' (45 m) C-C (OVER 45MPH (70 km/h))

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.


All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = chrzeselr	DESIGNED - EVERS	REVISED - T. RAMMACHER 10-27-94
et:\pw\work\p\dot\chrzeselr\d0303651\Dis	Std.dgn	DRAWN -	REVISED - C. JUCIUS 09-09-09
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 4/6/2012	DATE - 03-19-90	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DISTRICT ONE			
TYPICAL PAVEMENT MARKINGS			
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	24
TC-13		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				



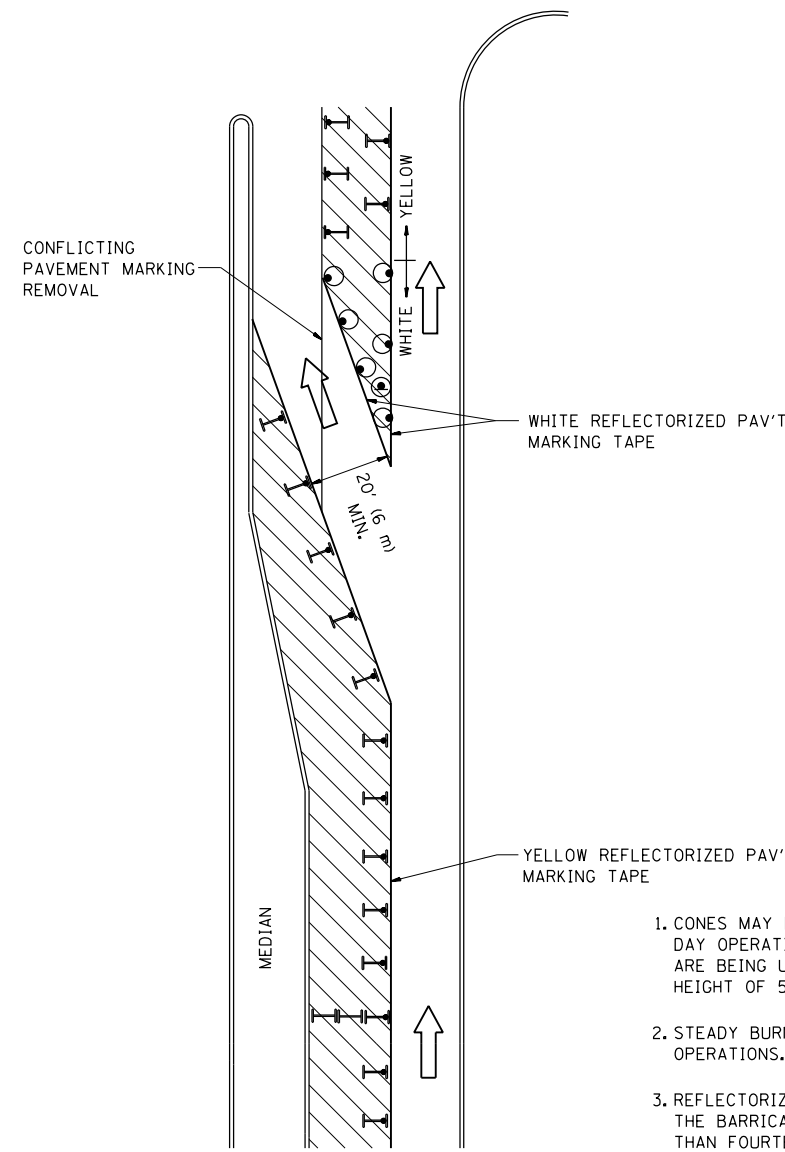





GENERAL NOTES

1. CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRUMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 28 (710) IN HEIGHT. WHEN CONES ARE BEING USED, THE "LEFT TURN LANE" SIGN MAY BE SKID MOUNTED AT A MINIMUM HEIGHT OF 5' (1.5 m).
2. STEADY BURNING LIGHTS WILL NOT BE REQUIRED ON BARRICADES OR DRUMS FOR DAY OPERATIONS. ALL LIGHTS SHALL BE MONODIRECTIONAL.
3. REFLECTORIZED TEMPORARY PAVEMENT MARKING TAPE SHALL BE PLACED THROUGHOUT THE BARRICADED AREA OF EACH TURN BAY WHERE THE CLOSURE TIME IS GREATER THAN FOURTEEN DAYS.
4. THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANE(S) AND THE RIGHT TURN BAY IS TO REMAIN OPEN. UNDER THIS CONDITION, "RIGHT TURN LANE" R3-100 24 x 24 (600 x 600) AND M6-2R 21 x 15 (530 x 380) SHALL BE USED.
5. THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES.
6. LONGITUDINAL DIMENSIONS MAY BE ADJUSTED TO FIT FIELD CONDITIONS.
7. FORM OPER 725 IS REQUIRED.
8. IF A DRUM OR TYPE II BARRICADE WITH AN ATTACHED SIGN PANEL WHICH MEETS NCHRP 350 REQUIREMENTS IS NOT AVAILABLE, THE SIGNS SHALL BE MOUNTED, ABOVE THE BARRICADES, ON SEPARATE SIGNS SUPPORTS THAT MEET NCHRP 350 PREQUIREMENTS.
9. TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SHALL BE INCLUDED IN THE COST SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in inches (millimeters) unless otherwise shown.

LEGEND


-  WORK AREA
-  LANE OPEN TO TRAFFIC
-  TYPE I OR II BARRICADE WITH STEADY BURN LIGHT
-  DRUM WITH STEADY BURN LIGHT
-  DRUM WITH SIGN (WITH OPTIONAL FLASHING LIGHT) SEE DETAIL
-  TYPE I OR II CHECK BARRICADE WITH FLASHING LIGHT

FILE NAME =	USER NAME = chrzesclr	REVISED -T, RAMMACHER 09-08-94	REVISED - R, BORO 09-14-09
et:\pw\work\pwidot\chrzesclr\d0303651\Dis	Std.dgn	REVISED - A. HOUSEH 11-07-95	REVISED -
	PLOT SCALE = 100.0000' / in.	REVISED - A. HOUSEH 10-12-96	REVISED -
	PLOT DATE = 4/6/2012	REVISED -T, RAMMACHER 01-06-00	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)			
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	25
TC-14			CONTRACT NO. 60T60	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

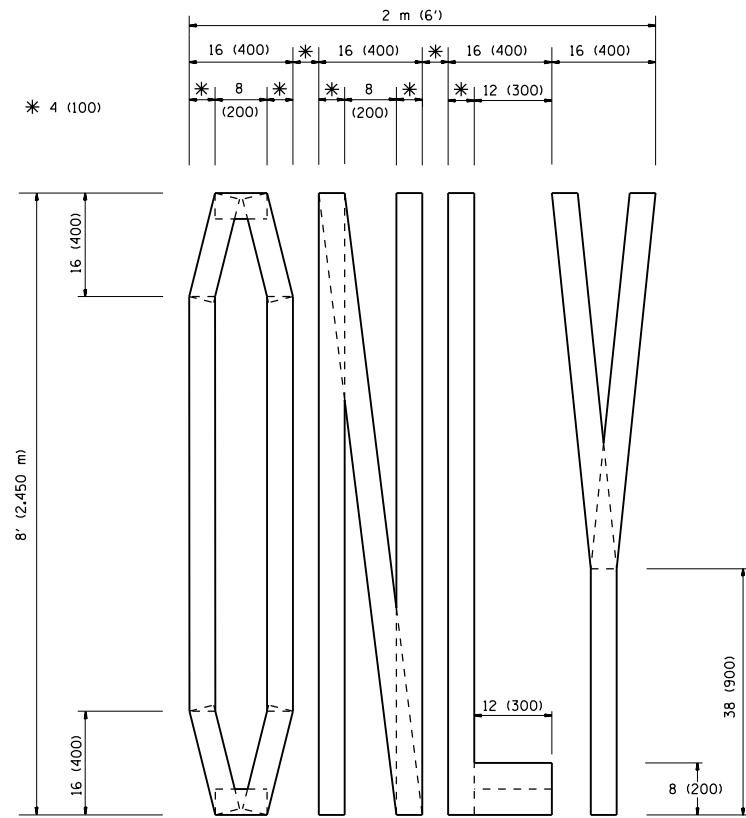

QUANTITY
 4 (100) LINE = 64.1 ft. (19.7 m)
 21.1 sq. ft. (1.97 sq. m)

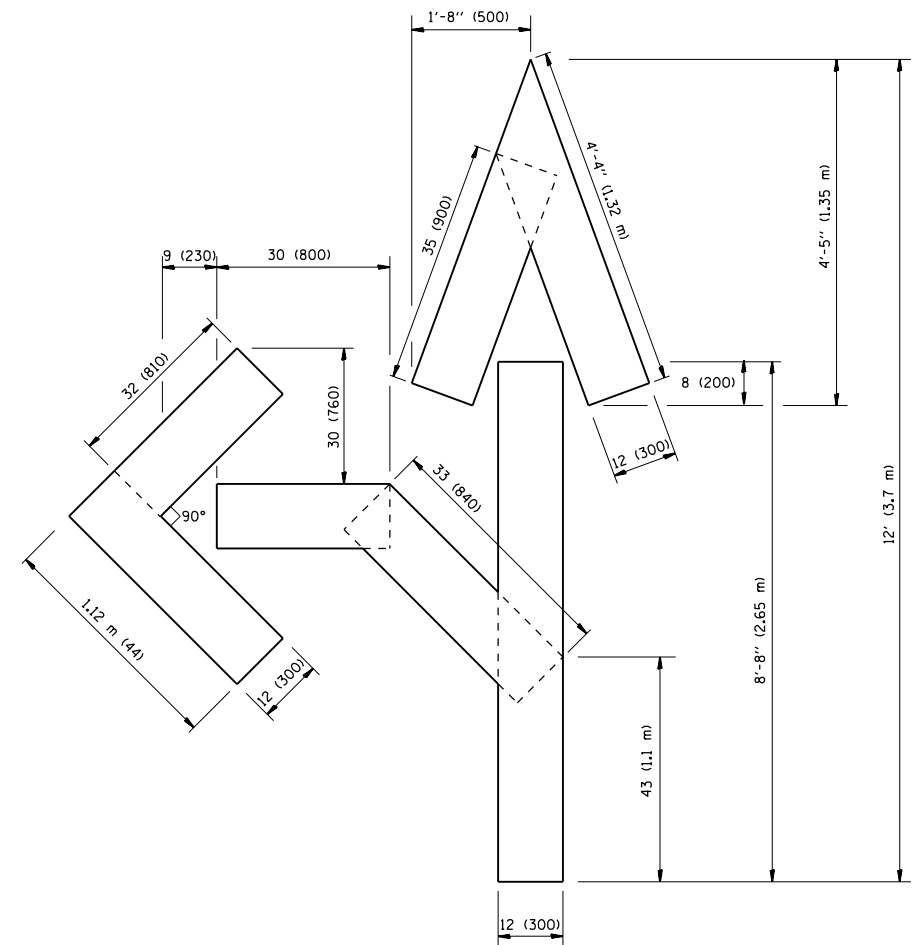

QUANTITY
 4 (100) LINE = 82.5 ft. (25.3 m)
 27.5 sq. ft. (2.53 sq. m)

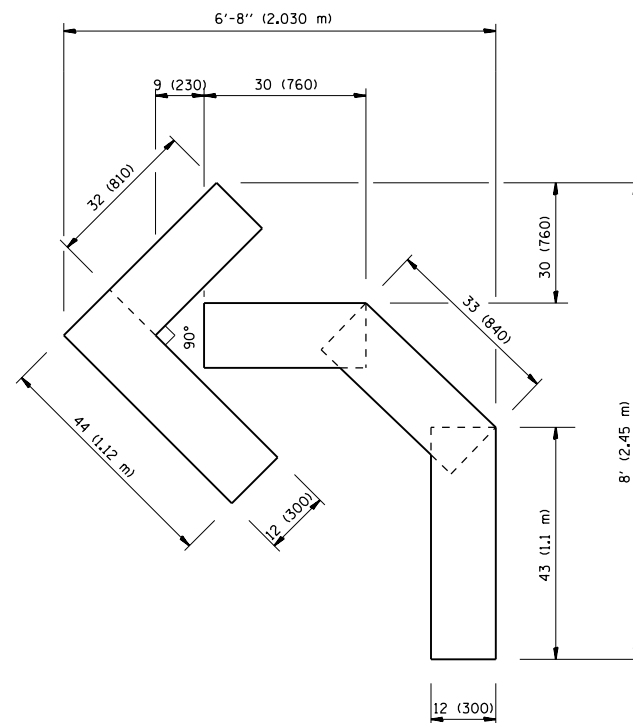

QUANTITY
 4 (100) LINE = 45.5 ft. (13.9 m)
 15.2 sq. ft. (1.39 sq. m)

All dimensions are in inches (millimeters) unless otherwise shown.


FILE NAME =	USER NAME = chrzesclr	DESIGNED -	REVISED -T. RAMMACHER 06-05-96
et:\pw\work\p\dot\chrzesclr\d0303651\Dis	Std.dgn	DRAWN -	REVISED -T. RAMMACHER 11-04-97
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -T. RAMMACHER 03-02-98
	PLOT DATE = 4/6/2012	DATE - 09-18-94	REVISED -E. GOMEZ 08-28-00

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING LETTERS AND SYMBOLS
 FOR TRAFFIC STAGING

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	26
TC-16		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

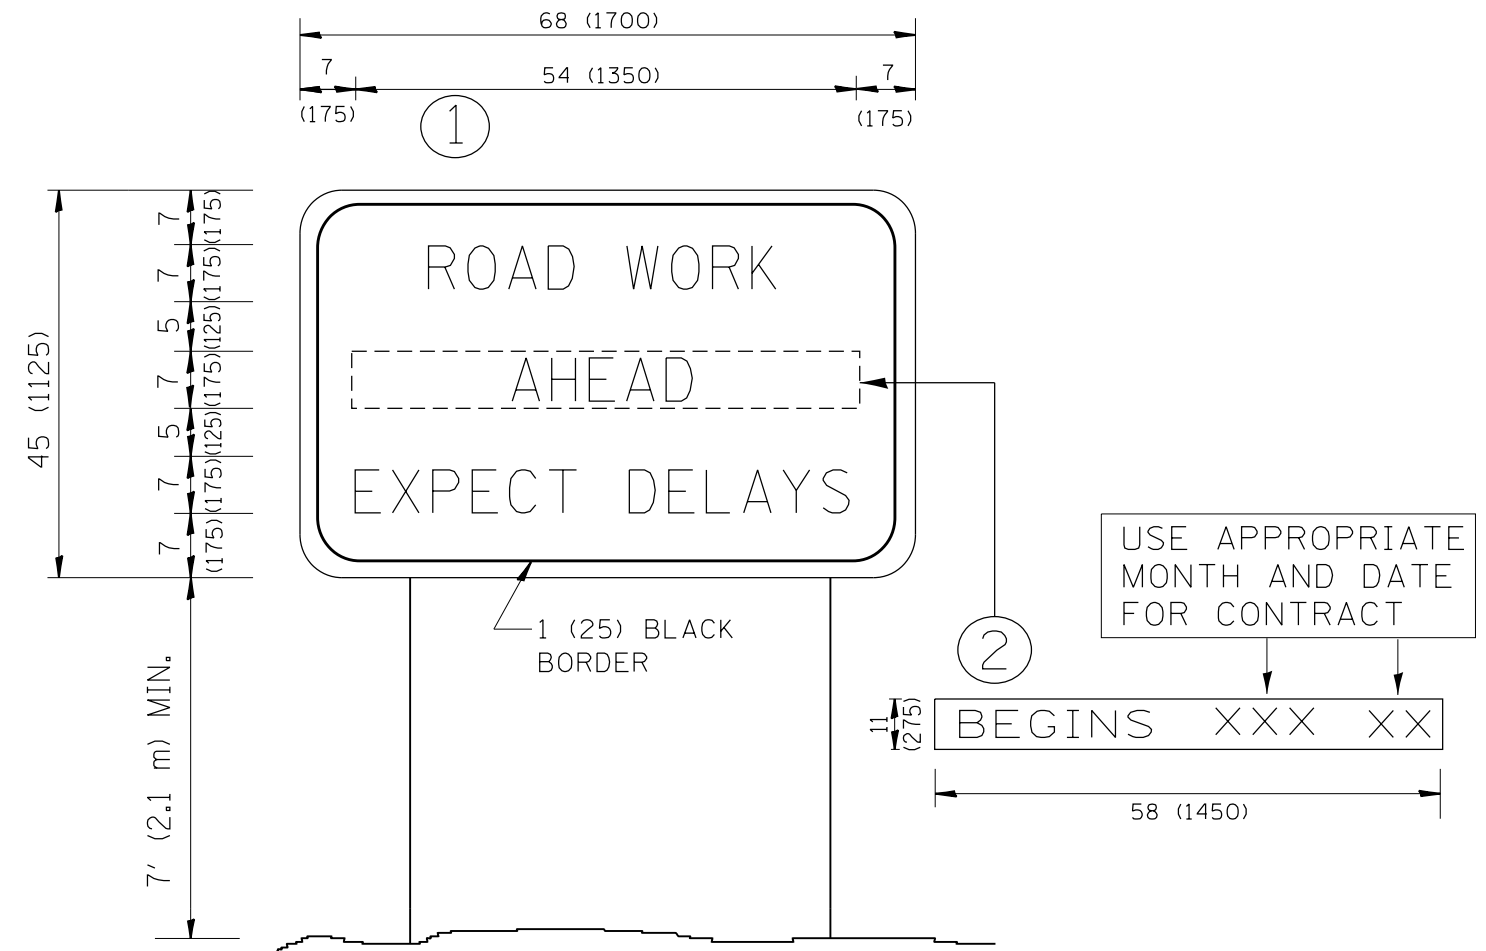

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = chrzesclr	DESIGNED -	REVISED - R. MIRS 09-15-97
et:\pw\work\pwidot\chrzesclr\d0303651\Dis	Std.dgn	DRAWN -	REVISED - R. MIRS 12-11-97
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED - T. RAMMACHER 02-02-99
	PLOT DATE = 4/6/2012	DATE -	REVISED - C. JUCIUS 01-31-07

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**ARTERIAL ROAD
INFORMATION SIGN**


SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	27
TC-22		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				


LOOP DETECTOR NOTES

1. EACH PAIR OF LOOP WIRES SHALL BE PLACED IN A SEPARATE EMPTY COILABLE NONMETALLIC CONDUIT FROM THE EDGE OF PAVEMENT TO THE HANDHOLE. SPACING BETWEEN THE HOLES DRILLED IN THE PAVEMENT SHALL NOT BE LESS THAN 6" (150 mm). EMPTY COILABLE NONMETALLIC CONDUIT SHALL BE INCLUDED IN THE COST OF THE LOOP WIRE.
2. THE NUMBER OF LOOP TURNS SHALL BE AS RECOMMENDED BY THE AMPLIFIER MANUFACTURER. ALL ADJACENT SIDES OF THE LOOPS SHALL BE INSTALLED IN SUCH A WAY THAT THE CURRENT FLOW IS IN THE SAME DIRECTION TO REINFORCE ITS MAGNETIC FIELDS FOR SMALL VEHICLE DETECTION.
3. EACH LOOP LEAD-IN SHALL BE IDENTIFIED AND PERMANENTLY TAGGED IN THE HANDHOLE. EACH LEAD-IN CABLE TAG SHALL INDICATE THE LOCATION OF THE LOOP, LOOP ROTATION (CLOCKWISE/COUNTERCLOCKWISE), LOOP LEAD-IN DIRECTION (IN OR OUT), LOOP CABLE NUMBER AND LOCATION IN CABINET, AND NUMBER OF TURNS IN THE DETECTOR LOOPS IN WATER PROOF INK AS INDICATED ON THE DISTRICT 1 STANDARD TRAFFIC SIGNAL DESIGN DETAIL. THE CONTRACTOR SHALL MARK LOOP LOCATIONS ON RECORD DRAWINGS AND PRESENT TO THE ENGINEER AFTER FINAL INSPECTION. LOOPS SHALL BE MARKED BY LANE AND LOOP NUMBER. SEE DETAIL BELOW.
4. ALL LOOP CABLE SHALL BE FASTENED WITH PLASTIC TIE WRAP TO THE HANDHOLE HOOKS.
5. IN ASPHALT PAVEMENT, LOOPS SHOULD BE PLACED IN THE BINDER AND DIVEHOLES MARKED AT THE CURB WITH A SAW-CUT. THE SAW-CUT SHALL BE CUT IN ACCORDANCE WITH LOCAL AND E.P.A. DUST CONTROL REQUIREMENTS. DETECTOR LOOP(S) SHALL NOT BE INSTALLED IN WET CONDITIONS AND THE SAW-CUTS MUST BE FREE OF DEBRIS AND RESIDUE SUCH AS DUST AND WATER WHICH IS TO BE ACHIEVED BY THE USE OF COMPRESSED AIR, WIRE BRUSHING AND HEAT DRYING ACCORDING TO SEALANT MANUFACTURER REQUIREMENTS. THE DETECTOR WIRE SHALL BE HELD IN PLACE BY THE USE OF FORM WEDGES. WEDGES SHALL BE SPACED NO MORE THAN 18" (450 mm) APART.
6. LOOP SPLICES SHALL BE SOLDERED USING A SOLDERING IRON. BLOW TORCHES OR OTHER DEVICES WHICH OXIDIZE COPPER CABLE SHALL NOT BE ALLOWED FOR SOLDERING OPERATIONS. SEE DETAIL BELOW RIGHT.
7. PREFORMED DETECTOR LOOPS SHALL BE USED, AS SHOWN ON THE PLANS, WHERE NEW CONCRETE PAVEMENT IS PROPOSED. THE INSTALLATION OF PREFORMED LOOPS SHALL BE IN ACCORDANCE WITH THE DISTRICT 1 SPECIFICATIONS OR AS DIRECTED BY THE ENGINEER.

LOOP LEAD-IN CABLE TAG

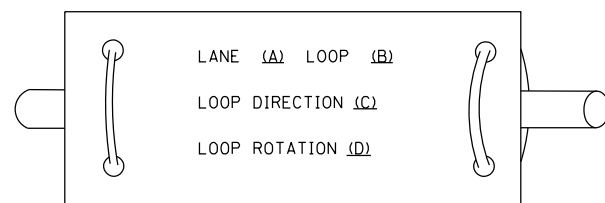


- A. LANE 1 IS THE LANE CLOSEST TO THE CENTERLINE OF THE ROADWAY
- B. LOOP #1 IS THE LOOP IN THE LANE CLOSEST TO THE INTERSECTION.
- C. LABEL LOOP CABLE "IN" OR LOOP CABLE "OUT".
- D. LABEL LOOP CABLE CLOCKWISE OR LOOP CABLE COUNTERCLOCKWISE.

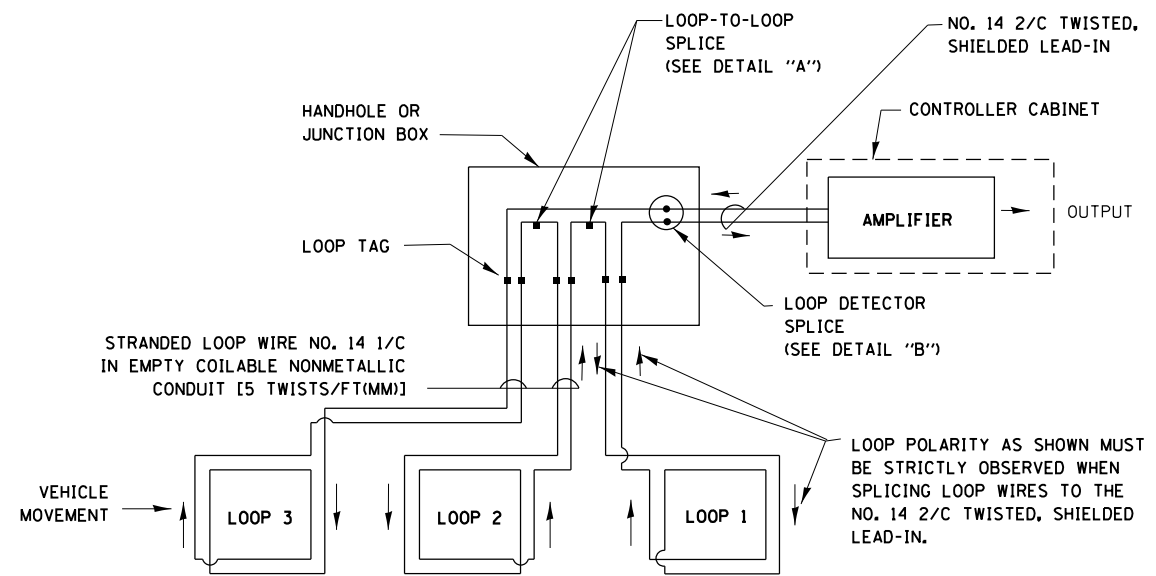


DETECTOR LOOP WIRING SCHEMATIC

- LOOPS SHALL BE SPLICED IN SERIES.
- SAW-CUTS SHALL BE A MINIMUM WIDTH OF 5/16" (8 mm).
- SAW-CUT DEPTHS SHALL BE 3" (75 mm). IF IN CONCRETE, THE SAW-CUT DEPTH SHALL BE TO THE TOP OF THE REINFORCEMENT.
- LOOP CORNERS SHALL BE DRILLED WITH A 2" (50 mm) DIAMETER CORE.

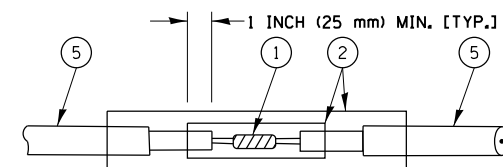


**DETAIL "A"
LOOP-TO-LOOP SPLICE**

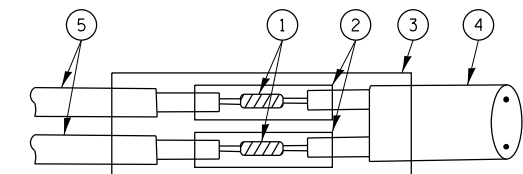


**DETAIL "B"
LOOP-TO-CONTROLLER SPLICE**

TYPE I LOOP

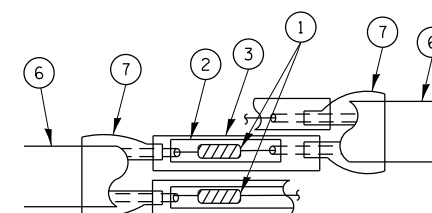

**DETAIL "A"
LOOP-TO-LOOP SPLICE**

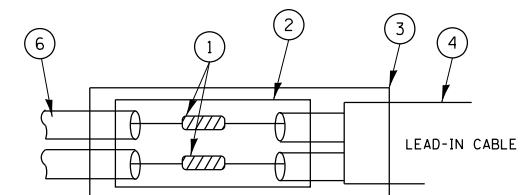

**DETAIL "B"
LOOP-TO-CONTROLLER SPLICE**

LOOP DETECTOR SPLICE

- 1 WESTERN UNION SPLICE SOLDERED WITH ROSIN CORE FLUX. ALL EXPOSED SURFACES OF THE SOLDER SHALL BE SMOOTH.
- 2 WCSMW 30/100 HEAT SHRINK TUBE, MINIMUM LENGTH 3" (75 mm), UNDERWATER GRADE.
- 3 WCS 200/750 HEAT SHRINK TUBE, MINIMUM LENGTH 6" (150 mm), UNDERWATER GRADE.
- 4 NO. 14 2/C TWISTED, SHIELDED CABLE.
- 5 LOOP CONDUCTOR WITH FLEXIBLE PLASTIC TUBE.
- 6 PRE-FORMED LOOP
- 7 XL POLYOLEFIN 2 CONDUCTOR BREAKOUT SEALS. TYCO CBR-2 OR APPROVED EQUAL

FILE NAME =	USER NAME = chrzesclr	DESIGNED - DAD	REVISED -
et:\pw\work\p\id\chrzesclr\40303651\013	Std.dgn	DRAWN - BCK	REVISED -
	PLOT SCALE = 100.0000' / in.	CHECKED - DAD	REVISED -
	PLOT DATE = 4/6/2012	DATE - 10-28-09	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**DISTRICT ONE
STANDARD TRAFFIC SIGNAL DESIGN DETAILS**

SCALE: NONE SHEET NO. 1 OF 6 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	28
TS-05			CONTRACT NO. 60T60	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

LOOPS NEXT TO SHOULDERS

PROVIDE A PAVEMENT REPLACEMENT NOTE WHICH SHOULD EQUAL 3' (900 mm) X WIDTH OF PAVED SHOULDER.

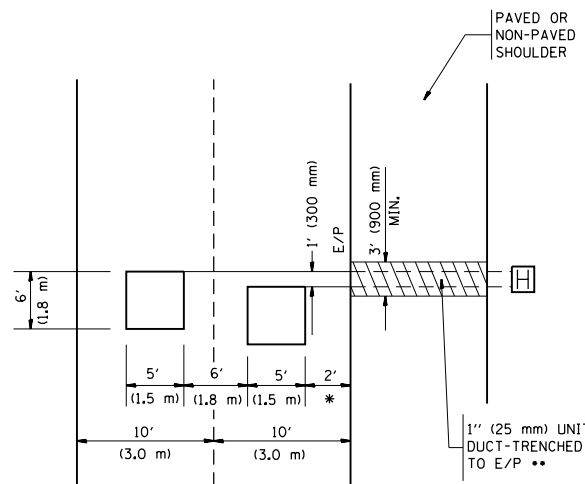


* = (600 mm)

** UNIT DUCT IS TO BE SHOWN ON PLAN SHEETS BUT SHALL NOT BE INCLUDED IN THE PAY ITEMS.

LEFT TURN LANES WITH MEDIANS
VOLUME DENSITY ("FAR OUT" DETECTION)
ON SAME APPROACH

(PROTECTED / PERMITTED LEFT TURN PHASING)

HANDHOLE LOCATION MAY VARY DEPENDING ON GEOMETRICS AND DESIGN OF TRAFFIC SIGNALS. HEAVY-DUTY HANDHOLES TO BE USED WHEN THE MEDIAN IS MOUNTABLE. REFER TO STANDARD 814001 TO ENSURE THAT HANDHOLE FITS IN MEDIAN.

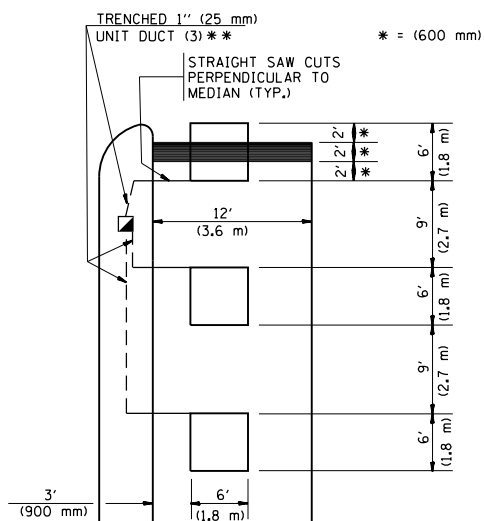


** UNIT DUCT IS TO BE SHOWN ON PLAN SHEETS BUT SHALL NOT BE INCLUDED IN THE PAY ITEMS.

NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

LEFT TURN LANES WITHOUT MEDIANS
VOLUME DENSITY ("FAR OUT" DETECTION)
ON SAME APPROACH

(PROTECTED / PERMITTED LEFT TURN PHASING)

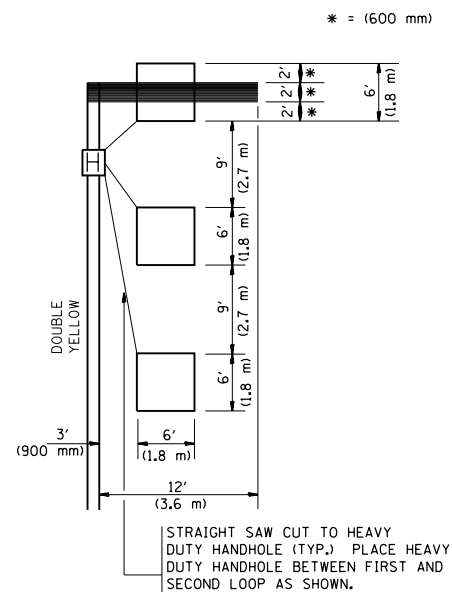

NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

NOTES:

VEHICLES LOOP DETECTORS

- * ALL LEAD IN CABLE SHALL BE TWO CONDUCTOR NO. 14 TWISTED, SHIELDED.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN SAW CUT FROM THE LOOP TO THE EDGE OF PAVEMENT OR TO A HANDHOLE IN THE PAVEMENT.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN ONE INCH (25 mm) UNIT DUCT BETWEEN THE EDGE OF PAVEMENT AND THE FIRST HANDHOLE OR JUNCTION BOX. EACH UNIT DUCT RUN SHALL BE SHOWN ON THE PLANS BY THE DESIGNER, BUT SHALL NOT BE PAID FOR SEPARATELY. THIS ITEM IS INCIDENTAL TO THE PAY ITEM FOR DETECTOR LOOPS.
- * ONE DIMENSION OF ALL DETECTOR LOOPS SHALL BE SIX FEET (1.8 m)
- * EACH LANE OF NON-LOCKING, PRESENCE DETECTION AND EACH LANE OF A DOUBLE LEFT TURN LANE REQUIRES A SEPARATE INDUCTIVE LOOP DETECTOR AND LEAD IN CABLE.
- * WHEN NON-LOCKING, PRESENCE DETECTION IS USED, MORE THAN ONE LOOP PER LANE IS REQUIRED BEHIND THE STOP BAR (i.e. 1-1/2, 1-3/4, 2).
- * WHEN SYSTEM LOOPS ARE REQUIRED ON AN APPROACH OF AN INTERSECTION, THE LOOPS USED FOR VOLUME DENSITY AND INTERSECTION TIMING SHALL ALSO BE USED AS SYSTEM DETECTORS. EACH ONE OF THESE TYPE OF LOOPS REQUIRES A SEPARATE TWO CONDUCTOR NO. 14 TWISTED SHIELDED CABLE AND A SEPARATE INDUCTIVE LOOP DETECTOR WHEN NEW CONTROLLERS ARE UTILIZED. THE DESIGNER SHALL LABEL THESE TYPES OF LOOPS AS "INTERSECTION AND SAMPLING (SYSTEM) DETECTORS" ON THE SIGNAL LAYOUT, THE INTERCONNECT PLAN AND THE SYSTEM CABLE PLAN. WHEN AN EXISTING CONTROLLER IS UTILIZED FOR THIS TYPE OF DETECTION, THE PAY ITEM "INDUCTIVE LOOP DETECTOR WITH SYSTEM OUTPUT" SHOULD BE USED.

PLACEMENT OF DETECTORS

THE FOLLOWING FIGURES REPRESENT THE MOST COMMON DETECTOR LOOP LOCATIONS AND SIZES. ADJUSTMENTS WILL BE NECESSARY FOR SPECIFIC GEOMETRIC CONSIDERATIONS.

LOCATIONS AND DEMENSIONS OF DETECTOR LOOPS ARE REQUIRED ON ALL SIGNAL LAYOUT PLAN SHEETS.


"FAR OUT" DETECTION REFERS TO LOCKING, PRESENCE TYPE DETECTION LOCATED IN THRU LANES, RIGHT TURN LANES, AND RIGHT TURN LANE TAPER AREAS (IF APPLICABLE), USUALLY 250' (75 m) IN ADVANCE OF STOP BARS. "UPTIGHT" DETECTION REFERS TO NON-LOCKING PRESENCE TYPE DETECTION LOCATED IN ALL LANES AND 10'-15' (3.0 m-4.5 m) BEHIND THE CROSSING STREET'S EDGE OF PAVEMENT EXTENDED.

NOTE:

ALL DETAILS AND NOTES SHOWN ARE FROM THE I.D.O.T. DISTRICT 1 TRAFFIC SIGNAL DESIGN GUIDELINES DATED JANUARY 1995


THIS DRAWING HAS BEEN PREPARED TO ASSIST THE RESIDENT ENGINEER FOR ALL ROADWAY RESURFACING OR S.M.A.R.T. PROJECTS WHERE THE DIMENSIONS ARE NOT SHOWN ON THE PLANS AND THE FINAL LOCATIONS FOR CROSSWALKS OR STOP BARS ARE NOT DETERMINED.

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION)
CROSS STREET-VOLUME DENSITY ("FAR OUT" DETECTION)

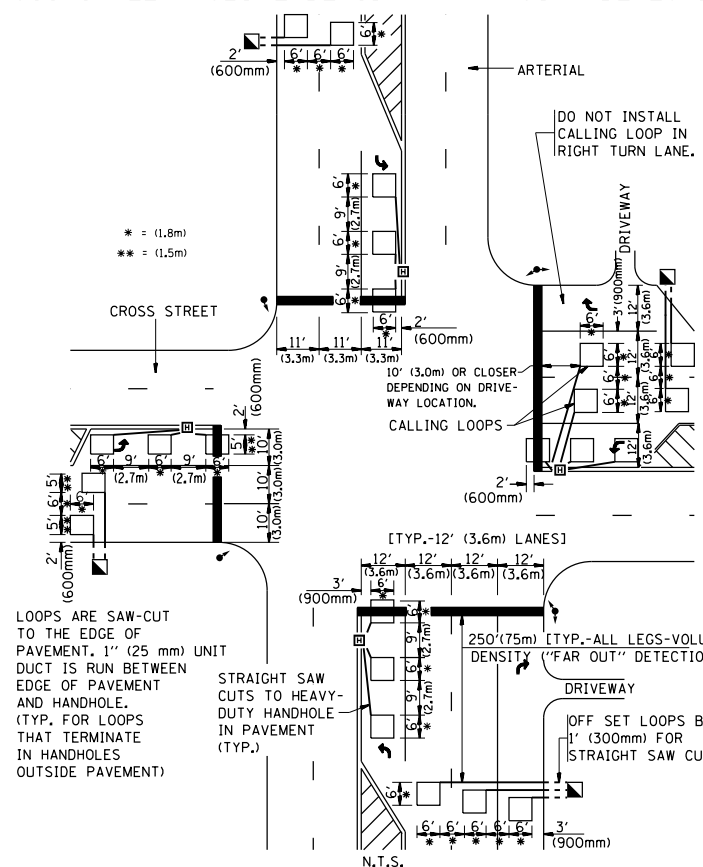

DETAIL 1
N.T.S.

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION)
CROSS STREET-NON VOLUME DENSITY ("UPTIGHT" PRESENCE DETECTION)

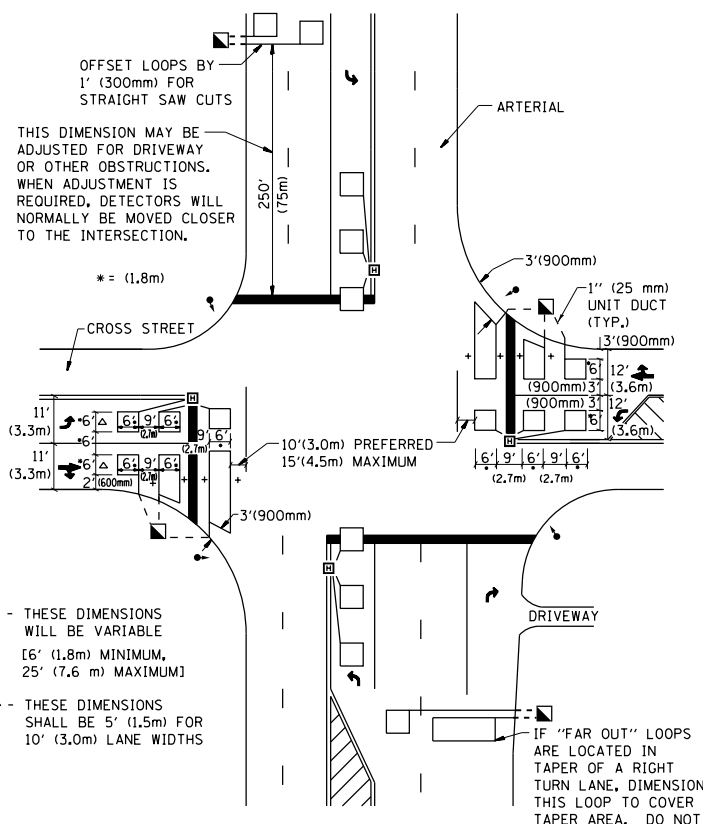

DETAIL 2
N.T.S.

FILE NAME =	USER NAME = chrzesl	DESIGNED -	REVISED -
et:\pw\work\p1dot\chrzesl\1\030365\1\01s	Std.dgn	DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / 1in.	CHECKED - R.K.F.	REVISED -
	PLOT DATE = 4/6/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT 1 - DETECTOR LOOP INSTALLATION
DETAILS FOR ROADWAY RESURFACING

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	2012-014 RS	KANE & KENDALL	29	29
TS-07		CONTRACT NO. 60T60		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				