

MAINTENANCE OF TRAFFIC GENERAL NOTES

- ONE LANE OF TRAFFIC WILL BE MAINTAINED AT ALL TIMES IN THE EASTBOUND DIRECTION.
- DRUM MINIMUM SPACING: 50' C-C TANGENT SECTION, 15' C-C AT CORNERS, OR AS SHOWN ON HIGHWAY STANDARDS.
- ALL SIGNAGE TO BE IN ACCORDANCE WITH MUTCD. SUGGESTED MAINTENANCE OF TRAFFIC SHOWN IS MINIMUM REQUIRED; CONTRACTOR SHALL PROVIDE ADDITIONAL TRAFFIC CONTROL MEASURES AS DIRECTED BY RESIDENT ENGINEER. THIS WORK WILL BE INCLUDED IN THE COST OF TRAFFIC CONTROL AND PROTECTION (SPECIAL).

SUGGESTED STAGING SEQUENCE

PRE-STAGE

MAINTENANCE OF TRAFFIC

- ESTABLISH DETOUR FOR EASTBOUND HIGHLAND ROAD IN ACCORDANCE WITH THE MUTCD, THE DETOUR PLAN, AND AS DIRECTED BY THE ENGINEER.

CONSTRUCTION

- PLACE EROSION CONTROL ITEMS PROJECT WIDE.

STAGE 1

MAINTENANCE OF TRAFFIC

- ESTABLISH THE EASTBOUND LANE IN ACCORDANCE WITH THE MUTCD, THE MOT PLAN, AND AS DIRECTED BY THE ENGINEER.

CONSTRUCTION OF SOUTH SIDE OF PAVEMENT

- REMOVE/MILL PAVEMENT.
- INSTALL MAINLINE STORM SEWER, LATERALS, AND DRAINAGE STRUCTURES.
- CONSTRUCT SUBGRADE AND PROPOSED PAVEMENT.
- HMA SURFACE COURSE WILL NOT BE PLACED AT THIS TIME.
- CONSTRUCT SIDEWALK
- PLACE TOPSOIL /SODDING/FERTILIZERS.

STAGE 2

MAINTENANCE OF TRAFFIC

- SHIFT THE EASTBOUND LANE ONTO THE PAVEMENT CONSTRUCTED IN STAGE 1 IN ACCORDANCE WITH THE MUTCD, THE MOT PLANS AND AS DIRECTED BY THE ENGINEER.

CONSTRUCTION OF NORTH SIDE OF PAVEMENT

- REMOVE/MILL PAVEMENT.
- INSTALL STORM SEWER LATERALS AND DRAINAGE STRUCTURES.
- CONSTRUCT SUBGRADE AND PROPOSED PAVEMENT.
- HMA SURFACE COURSE WILL NOT BE PLACED AT THIS TIME.
- PLACE TEMPORARY BITUMINOUS RAMPS.
- CONSTRUCT SIDEWALK
- PLACE TOPSOIL /SODDING/FERTILIZERS.


STAGE 3

MAINTENANCE OF TRAFFIC


- MAINTAIN BOTH DIRECTIONS OF TRAFFIC IN ACCORDANCE WITH THE MUTCD, AND AS DIRECTED BY THE ENGINEER.
- CONSTRUCTION ACTIVITIES BELOW SHALL BE COMPLETED IN ACCORDANCE WITH IDOT STANDARD 701501

CONSTRUCTION (SURFACE COURSE)

- PLACE HMA SURFACE COURSE.
- PLACE FINAL PAVEMENT MARKINGS.
- REMOVE DETOUR ROUTE SIGNAGE.
- REMOVE TEMPORARY EROSION CONTROL ITEMS AS DIRECTED BY THE ENGINEER.

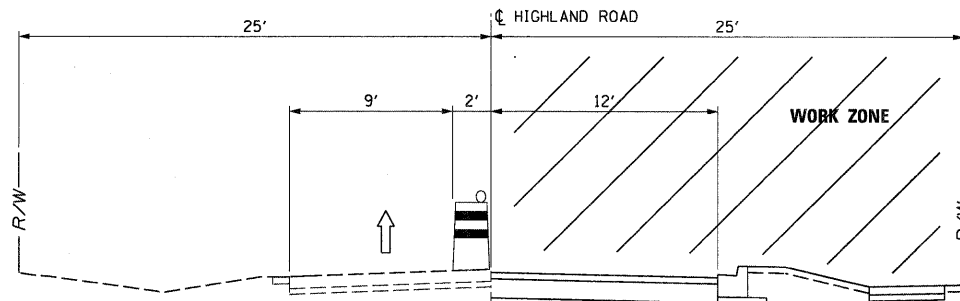


**MAINTENANCE OF TRAFFIC-STAGE 1
LOOKING EAST**

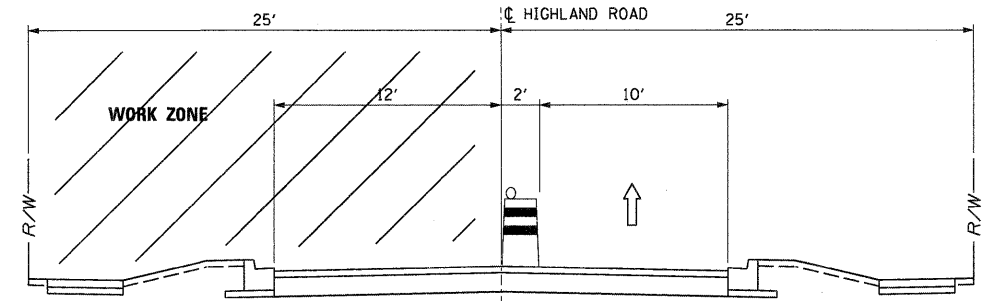

**MAINTENANCE OF TRAFFIC-STAGE 2
LOOKING EAST**

LEGEND

- SIGNALIZED INTERSECTION
- DETOUR SIGNS, NUMBER DENOTES TYPE.
- TYPE III BARRICADE WITH AMBER FLASHING LIGHTS.
- DETOUR ROUTE
- DIRECTION OF TRAFFIC

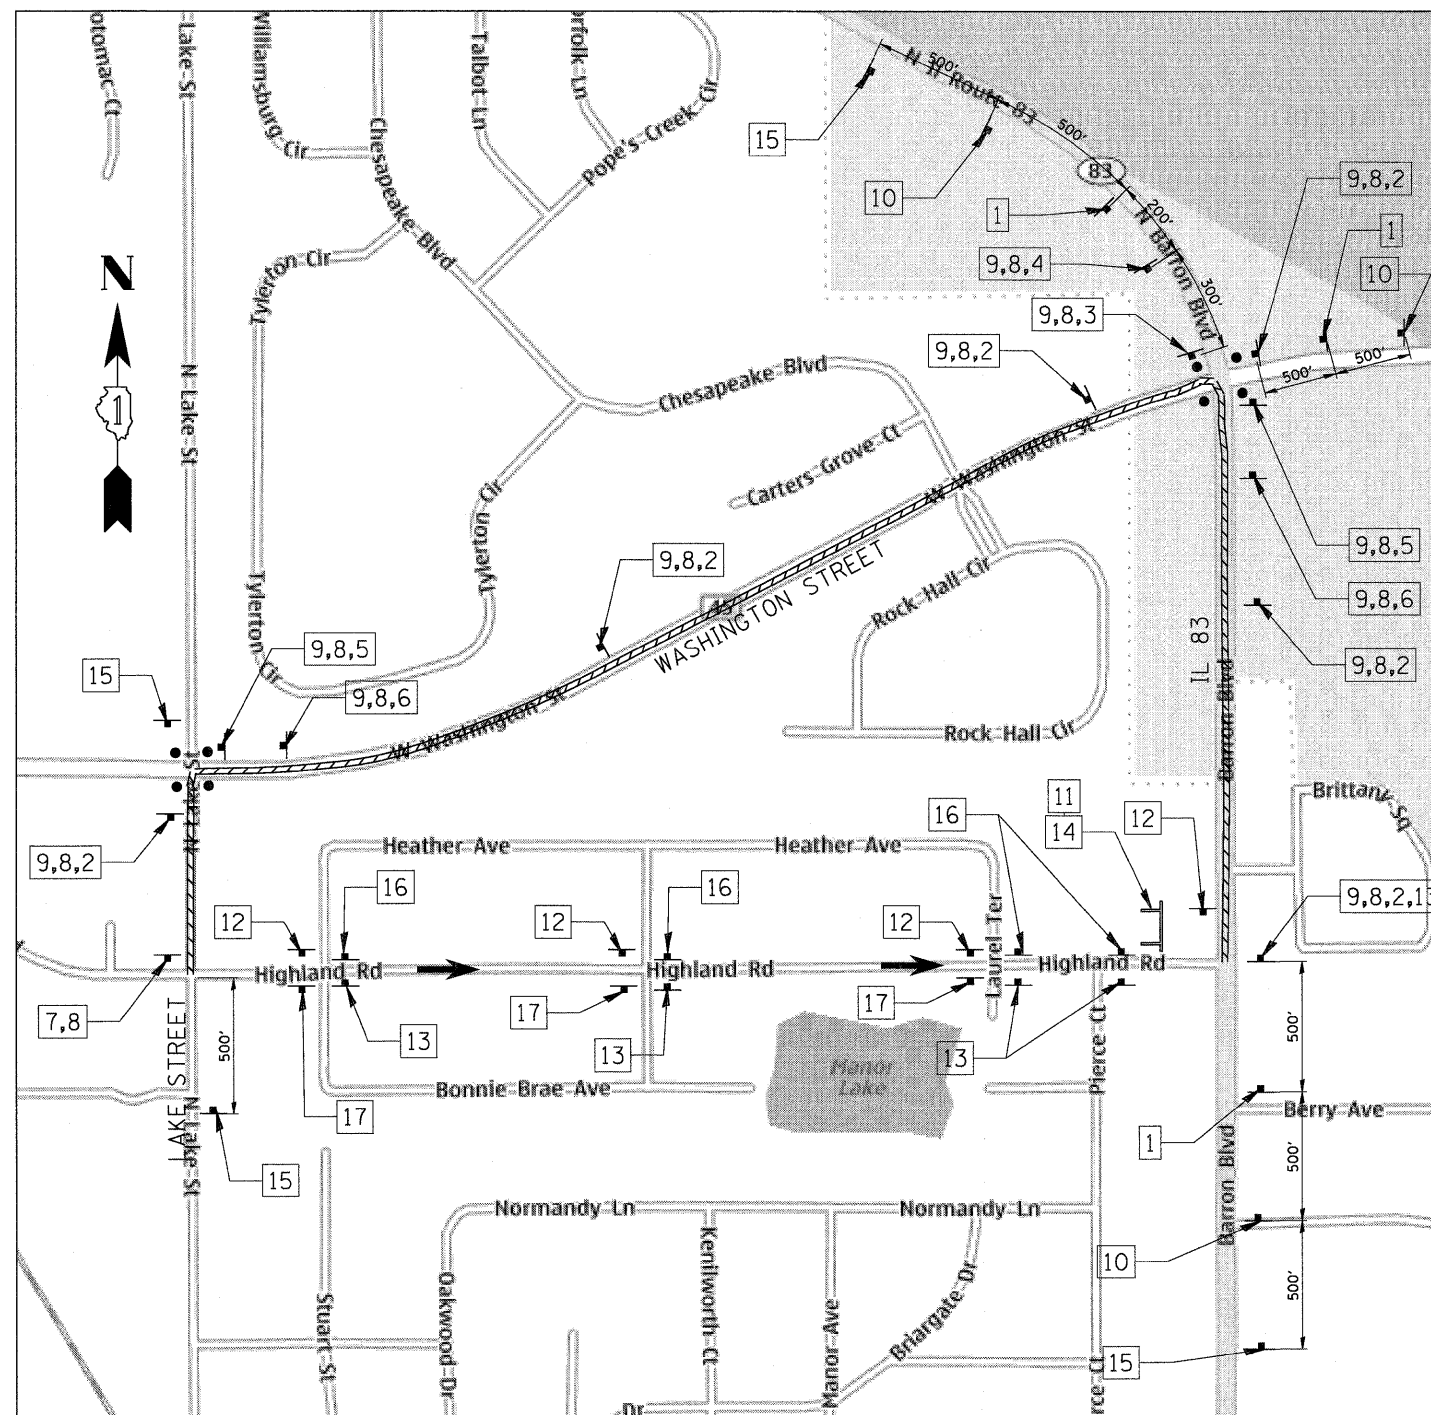

MAINTENANCE OF TRAFFIC AND DETOUR SIGNAGE PLAN

SCHEDULE OF SIGNS

SIGN NO.	SIGN TYPE	QUANTITY
1	W20-2 48" X 48"	1
2	M4-9 30" X 21"	5
3	M4-9 R 30" X 21"	1
4	M4-9 R 30" X 21"	1
5	M4-9 L 30" X 21"	2
6	M4-9 L 30" X 21"	2
7	M4-8a 24" X 18"	1
8	SPECIAL NO. 1	12
9	M3-4 24" X 12"	11
10	R11-4 60" X 30" (SPECIAL NO. 2)	2
11	R11-2 48" X 30" R5-1 R 30" X 30"	1
12	R3-1 30" X 30"	4
13	R3-2 30" X 30"	5
14	M4-10 R 48" X 18"	1
15	W20-1 48" X 48"	2
16	R6-1 R 36" X 12"	4
17	R6-1 L 36" X 12"	3