APPROXIMATELY 15' (4.5 m) OR 8' (2.4 m) BACK FROM AND PARALLEL TO GATE, IF PRESENT. IS' USE TABLE 2C-4 FROM THE (1.5 m) MUTCD MANUAL FOR THIS DISTANCE * MINimum Distance 400' for 55 MPH 250' for 45 MPH 100' for 35 MPH 1

PAVEMENT MARKINGS AT

RAILROAD-HIGHWAY GRADE CROSSING

EACH LANE.

OF THE MUTCD.


WHEN THE PAVEMENT MARKING SYMBOL

TO THE ADVANCE WARNING SIGN (W10-1) AS PLACED BY TABLE II-1, CONDITION B

IS USED, A PORTION OF THE SYMBOL SHOULD BE LOCATED DIRECTLY ADJACENT

RAILROAD CROSSING WITH INTERCONNECT ONLY

RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

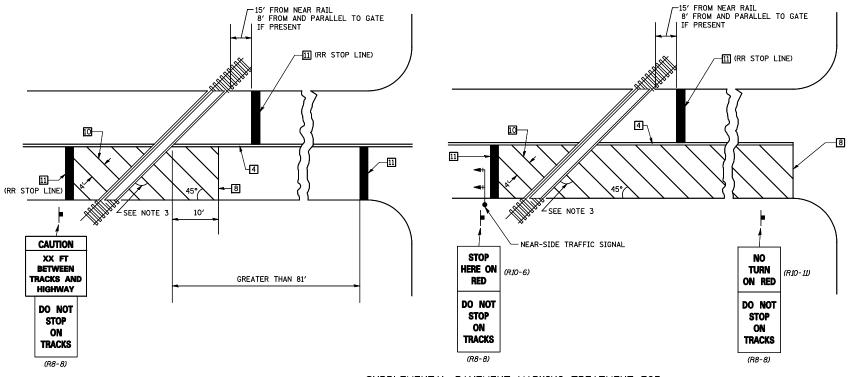

SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

SCALE:

GENERAL NOTES

- SUPPLEMENTAL PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL PAVEMENT MARKINGS AND THE TRACK WOULD BE LESS THAN 20°, THE PAVEMENT MARKINGS SHOULD BE PLACED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DISTRICT	5	DETAIL	. NO. 78	OOAA	AA
- 10				TOTAL	CHEE

	FILE NAME =	USER NAME = SJS	DESIGNED -	REVISED - 11/06
	k:\110149\Plans\details.dgn		DRAWN -	REVISED -
١	Johnson, Depp & Quisenberry CONSULTING ENGINEERS Springfield, Illinois	PLOT SCALE = 40.00 '/ IN.	CHECKED -	REVISED -
		PLOT DATE = 06/17/2008 16:13:34	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING AND MARKERS (RURAL & URBAN APPLICATIONS)

SHEET NO. 4 OF 4 SHEETS STA. TO