


| SIGN SCHEDULE | | | | | | | | | | | |
|--------------------------|---------|---------|------|----------|----------|---------|------|-----------------|------------|-------------|-----------|
| EXISTING (TO BE REMOVED) | | | | PROPOSED | | | | METAL POST TYPE | | | |
| SIGN | STATION | OFFSET | TYPE | SIGN | STATION* | OFFSET* | TYPE | SIGN DEPTH | SIGN WIDTH | SIGN HEIGHT | POST TYPE |
| C | 306+69 | 4.8 Lt | R4-7 | C | 306+70 | 5.0 Lt | R4-7 | 30" | 24" | 8.0' | B |
| C | 307+30 | 4.5 Rt | R4-7 | C | 307+35 | 5.5 Rt | R4-7 | 30" | 24" | 7.5' | B |
| D | 307+87 | 60.0 Lt | R5-1 | D | 307+90 | 60.0 Lt | R5-1 | 36" | 36" | 9.0' | B(2) |
| E | | | W4-2 | E | 314+50 | 64.0 Lt | W4-2 | 36" | 36" | 8.5' | ** |
| E | 307+88 | 8.8 Lt | W4-2 | E | 314+50 | 8.0 Lt | W4-2 | 36" | 36" | 8.5' | ** |

* FINAL LOCATION ESTABLISHED IN FIELD PER RE DIRECTION.
 ** NEW 4"x6" WOOD POST TO BE INSTALLED AND IS INCLUDED IN THE COST OF SOLAR-POWERED FLASHER/POST MOUNTED (YELLOW LED DISPLAY)

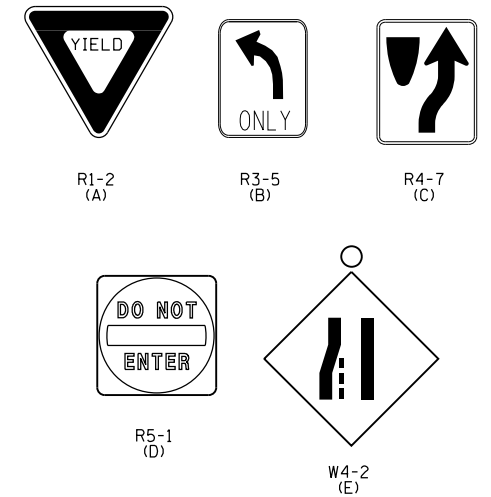

PAVEMENT MARKING NOTES:
 ALL FINAL PAVEMENT MARKINGS SHALL BE THERMOPLASTIC (OF THE EXTRUDED TYPE) AND SHOULD BE PLACED IN ACCORDANCE WITH "DISTRICTONE TYPICAL PAVEMENT MARKINGS DETAIL", (TC-13)
 ALL RAISED REFLECTIVE PAVEMENT MARKINGS SHALL BE PLACED IN ACCORDANCE WITH THE DISTRICT ONE "TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKER DETAIL", (TC-11)

LANDSCAPING NOTES:
 1. TOPSOIL, 4" SHALL BE PROVIDED IN ALL AREAS OF SEEDING.
 2. APPLY NITROGEN FERTILIZER NUTRIENT AND POTASSIUM FERTILIZER NUTRIENT TO ALL SEEDING AREAS.