


**EROSION CONTROL NOTES**

1. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.
2. TEMPORARY DITCH CHECKS ARE MEASURED PER FOOT, REGARDLESS OF TYPE OR CONFIGURATION USED.
3. STOCKPILES OF SOIL AND OTHER BUILDING MATERIALS TO REMAIN IN PLACE MORE THAN THREE (3) DAYS SHALL BE FURNISHED WITH EROSION AND SEDIMENT CONTROL MEASURES (I.E. PERIMETER SILT FENCE). STOCKPILES TO REMAIN IN PLACE FOR 30 DAYS OR MORE SHALL RECEIVE TEMPORARY SEEDING.
4. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS TO PREVENT POLLUTION OF STORM WATER AND SHALL FOLLOW IEPA REGULATIONS & IDOT CONSTRUCTION MEMORANDUM NO. 06-60.
5. STABILIZATION MEASURES SHALL BE INITIATED WITHIN 7 DAYS OF CONSTRUCTION ACTIVITY TEMPORARILY OR PERMANENTLY CEASING IN AREAS WHERE IT WILL NOT OCCUR FOR A PERIOD OF 14 OR MORE CALENDAR DAYS.
6. THE SOIL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE INSPECTED WEEKLY AND AFTER 1/2 INCH OF RAIN OR MORE BY THE INDIVIDUAL ON SITE IN CHARGE OF SOIL EROSION AND SEDIMENT CONTROL DURING THE CONSTRUCTION OF THE PROJECT.
7. SILT FENCE SHALL BE INSTALLED FOLLOWING THE COMPLETION AND STABILIZATION OF THE STORMWATER FACILITIES AND WILL REMAIN IN PLACE UNTIL THE CONTRIBUTING AREA IS STABILIZED.
8. ALL ADJACENT STREETS MUST BE KEPT CLEAR OF DEBRIS, INSPECTED DAILY AND CLEANED WHEN NECESSARY OR AS DIRECTED BY THE ENGINEER.
9. ALL SOIL EROSION AND SEDIMENT CONTROL PRACTICES ARE REFERENCED FROM THE ILLINOIS URBAN MANUAL.

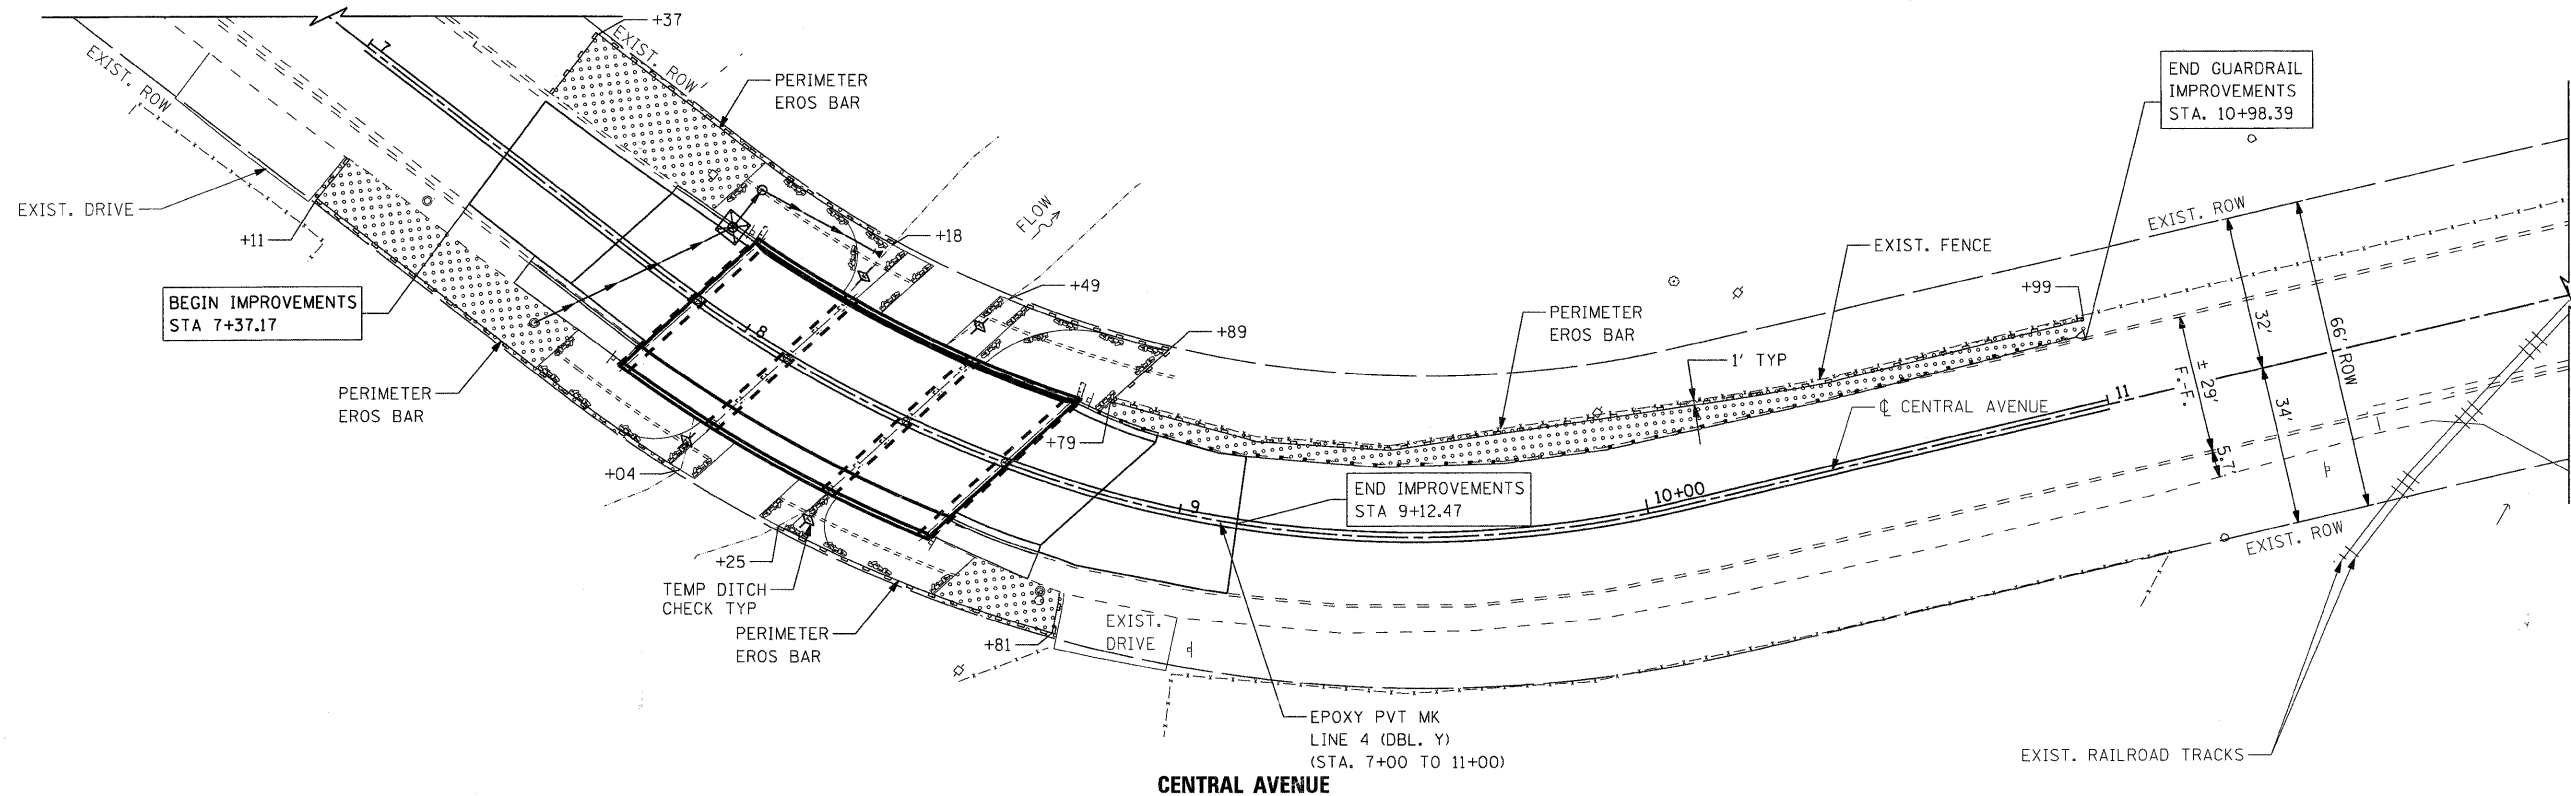

**TEMPORARY EROSION CONTROL SEQUENCE OF CONSTRUCTION**

1. ESTABLISH TEMPORARY EROSION CONTROL MEASURES AND ERECT PERIMETER EROSION BARRIER ALONG SITE BOUNDARIES PRIOR TO EARTHWORK.
2. INSTALL DITCH CHECKS IMMEDIATELY AFTER DITCH GRADING IS COMPLETED.
3. INSTALL TEMPORARY EROSION CONTROL SEEDING.

**LEGEND**

	PERIMETER EROSION BARRIER		FINAL RESTORATION OF DISTURBED AREAS - TOPSOIL FURNISH AND PLACE, 4" - SEEDING CLASS 2A - EROSION CONTROL BLANKET
	EXISTING R.O.W.		TEMPORARY DITCH CHECK
	DIRECTION OF FLOW		INLET AND PIPE PROTECTION

COMPANY NAME: SEC GROUP, INC.  
 PROJECT CONTACT: Robert G. Davies  
 CLIENT: City of Rockford  
 DATE PLOTTED: 1/26/2010 10:08 AM  
 FILE NAME: 090026-Ero.dgn  
 PLOT DRIVER: pdf.plt  
 STANDARD: Trans.tbl

**SEC Group, Inc.**  
 An HR Green Company  
 450 N. First Street  
 Moline, IL 62450-3138  
 T: 815.395.1778 F: 815.395.1751  
 www.secgroupinc.com  
 450 N. First Street, Moline, IL 62450-3138

USER NAME = rwhood	DESIGNED - KMA	REVISED -
FILE NAME = 090026-Ero.dgn	DRAWN -	REVISED -
PLOT SCALE =	CHECKED - TH	REVISED -
PLOT DATE = 1/26/2010	DATE - 1/26/10	REVISED -

**CITY OF ROCKFORD**

**CENTRAL AVENUE OVER THE SOUTH BRANCH OF KENT CREEK STRIPING, EROSION CONTROL, AND RESTORATION PLAN**

SCALE: SHEET NO. 1 OF SHEETS STA. TO STA.

F.A.U. RTE. 5102	SECTION 09-00557-00-BR	COUNTY Winnebago	TOTAL SHEETS 18	SHEET NO. 7
CONTRACT NO. 85508			FED. ROAD DIST. NO. 2 ILLINOIS FED. AID PROJECT	