


**EXISTING TYPICAL CROSS SECTION  
THATCHER AVENUE**  
(STATION 23+10 TO STATION 24+75)

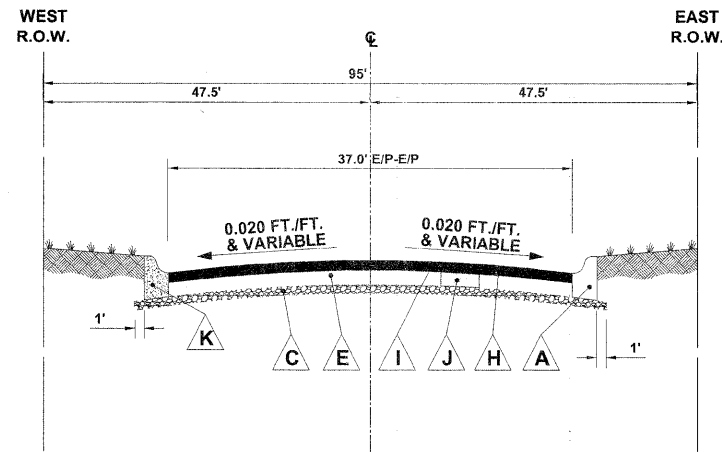

**PROPOSED TYPICAL CROSS SECTION  
THATCHER AVENUE**  
(STATION 23+10 TO STATION 24+75)

**LEGEND OF SYMBOLS**

SYMBOL	DESCRIPTION
A	EXISTING COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.12
B	EXISTING PORTLAND CEMENT CONCRETE SIDEWALK
C	EXISTING SUB-BASE GRANULAR MATERIAL, 4" AND VARIABLE
D	EXISTING HOT-MIX ASPHALT SURFACE COURSE, 2"
E	EXISTING CONCRETE BASE COURSE
F	PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, 2 3/4"
G	EXISTING HOT-MIX ASPHALT BINDER COURSE, 1" & VARIABLE
H	PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL 4.75, N50, 1"
I	PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX D, N50, 2"
J	PROPOSED CLASS D PATCHES, 10"
K	PROPOSED INTERMITTENT COMBINATION CONCRETE CURB & GUTTER REMOVAL & REPLACEMENT

Drawing file: W:\Projects\74008075 - Thatcher Ave\TYPSEC.dwg Jun 02, 2009 - 11:00am



953 Riverside Road  
Webster, Illinois 60594-2706  
Phone: 708-965-8800  
Fax: 708-965-2322

USER NAME	DESIGNED	CH	REVISED
	DRAWN	MK	REVISED
PLOT SCALE	CHECKED	CH	REVISED
	DATE	4-21-09	REVISED
PLOT DATE			

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**EXISTING AND PROPOSED  
TYPICAL CROSS SECTIONS**

SCALE: NONE SHEET NO. OF SHEETS STA. TO STA.

F.A.U. RTE:	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2753	09-00089-00-RS	COOK	15	6
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 63215	
ARA-9003(349)			E.H.E. PROJECT NO. 740-09-07501	