

RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	09-00043-00-RS	MASSAC	4	1

CONTRACT #99392

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

**PLANS FOR PROPOSED
FEDERAL AID SECONDARY PROJECT**
AMERICAN RECOVERY AND REINVESTMENT ACT (ARRA)
FAU9762 & FAU9757
(7th STREET & 19th STREET)
SECTION 09-00043-00-RS
CITY OF METROPOLIS
PROJECT NO. ARA-5045(008)
JOB NO. C-99-554-09

LICENSED PROFESSIONAL ENGINEER
STATE OF ILLINOIS
Brian C. Giltner
062-055223
Brian C. Giltner 5/11/09
signature date
November 30, 2009
license expires

INDEX OF SHEETS

1. COVER SHEET
2. SUMMARY OF QUANTITIES AND TYPICAL SECTIONS
3. 7th STREET
4. 19th STREET

SEE PROPOSAL BOOKLET FOR HIGHWAY STANDARDS:

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701301-03 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701901-01 TRAFFIC CONTROL DEVICES
- 780001-02 TYPICAL PAVEMENT MARKINGS

SPECIAL PROVISIONS

SUMMARY OF QUANTITIES

NO.	CODE NO.	ITEM	UNIT	QUANTITY
1.	40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	1,673
2.	40603315	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N70	TON	1,748
3.	44000198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	16,636
4.	67100100	MOBILIZATION	L SUM	1
5.	78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	6,709
6.	Z0042200	PORTLAND CEMENT CONCRETE PAVEMENT SURFACE REMOVAL	SQ YD	90
7.	Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	L SUM	1


A Specialty Item

DESIGN CLASSIFICATION: URBAN COLLECTOR

ADT: 2,180 (7th Street)
1,930 (19th Street)



J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

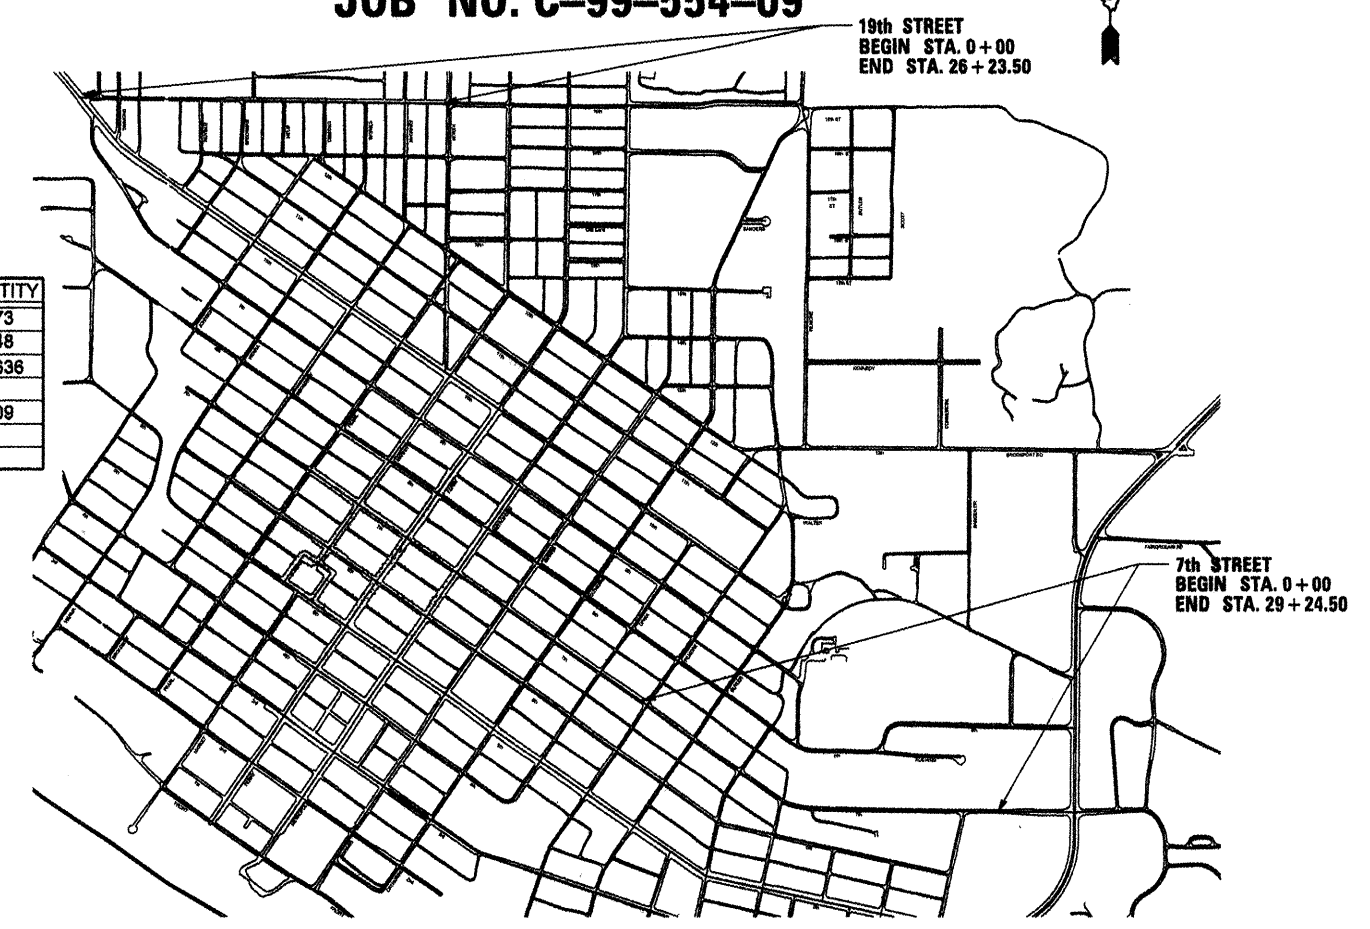

TOTAL LENGTH OF IMPROVEMENT = 5,548 FEET = 1.05 MILES
NO OMISSIONS
NET LENGTH OF IMPROVEMENT = 5,548 FEET = 1.05 MILES
SCALE = 1" = 1400'
DESIGN SPEED = 30 M.P.H.

AGENCY RESPONSIBLE FOR LETTING

APPROVED *Billy W. Daniel* 5/12/09
Date
Mayer
Local Agency, Position

PASSED 5/12/2009
Date
Richard W. Alderman
District #9 Engineer of Local Roads & Streets

RELEASING FOR BID BASED ON LIMITED REVIEW
Date *May 13, 2009*
May C. Adams
Deputy Director of Highways, Region #4 Engineer



CONTRACT #99392