

UTILITY REFERENCE TABLE

J.U.L.I.E.	Call 48 hours prior to construction	(800) 892-0123
Telephone	Mr. John Bachelder OSP National Support / Investigations MCI / Network Services, Inc. 2400 North Glenville Drive Richardson, Texas 75082	(972) 729-6016
	Mr. William O'Conner SBC 162 South York Road Elmhurst, Illinois 60126	(630) 941-4200
Electricity	Mr. John D. Pribich Program Manager, Public Relocation ComEd Three Lincoln Centre Fourth Floor Oakbrook Terrace, Illinois 60181-4260	(630) 437-2212
Water & Sewer	Mr. Ron Sieraski Superintendent of Public Works Village of Schiller Park 9526 West Irving Park Road Schiller Park, Illinois 60176	(847) 822-8592 (847) 671-8521
	Mr. Scott Stogsdill Utility Consultant Nicor Gas 1844 Ferry Road Naperville, Illinois 60563-9600	(630) 983-8676
Cable Television	Mr. Robert L. Schuller, Jr. Right of Way Manager Comcast Cable Communications, Inc. Greater Chicago Market Affirmation 688 Industrial Drive Elmhurst, Illinois 60126	(630) 600-6316

GENERAL NOTES

All elevations refer to N.G.V.D. (National Geodetic Vertical Datum).

The Contractor shall furnish, erect, and when directed by the Engineer, completely remove two construction signs. The exact location of the signs shall be determined by the Engineer in the field.

All lateral drainage that exists prior to construction shall be restored as shown on the plans and as directed by the Engineer. Unless otherwise specified all costs of restoration shall be considered included in the Contract and no additional compensation will be allowed.

All excess excavation and unsuitable materials shall be disposed of at locations provided by the Contractor at his expense and at locations inspected and approved by the Engineer.

All construction operations shall be contained within the easement area or work limits as indicated on the plans. It shall be the full responsibility of the Contractor to secure all rights of ingress and egress to said Right-of-Way including the satisfactory protection and restoration of property as required in Art. 107.20 and 107.23 of the Standard Specifications.

Class SI Concrete shall be used throughout. All exposed edges of concrete shall be beveled 3/4".

Reinforcement bars shall conform to the requirements of ASTM A706 Grade 60.

Plan dimensions and details relative to the existing structures have been taken from existing plans and/or past surveys and reports and are subject to nominal construction variations. It shall be the Contractor's responsibility to verify such dimensions and details in the field and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of the work; however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

The Contractor is reminded to protect and restore at his expense, in accordance with Article 107.20 of the Standard Specifications, any private or public property, including access roads, which may be damaged or destroyed due to construction operations.

All open excavations are to be surrounded with a four foot high construction fence during non-working hours. The fence material shall be approved by the Engineer. The cost shall be considered included in the contract.

All material excavated from the bottom of the existing channel must be deposited in a self-contained area in compliance with all State statutes, regulations, and permit requirements with no discharge to public waters unless a permit has been issued by the Illinois E.P.A.

The location, maintenance, removal, and restoration to original condition of all haul roads shall be as approved by the Engineer and all costs shall be considered included in the Contract.

The Contractor shall notify the Village of Franklin Park, the Village of Schiller Park and the Township concerning the closing of Village streets and shall conform to all requirements so specified without additional cost to the State.

All dewatering costs shall be considered included in the Contract.

The Contractor shall take due care while excavating near existing structures. Any damages caused by the construction activity shall be corrected at the expense of the contractor.

Prior to the beginning of work in the vicinity of the utilities, the Contractor shall contact the owners listed in the Utility Reference Table and schedule work so as not to interfere with required adjustments.

With the exception of those utilities designated on the plans to be adjusted by the Contractor, all existing utilities within or adjacent to the construction areas affected by the construction operations shall be adjusted by others. Unless otherwise specified, all utilities shall be protected and not disturbed. All cost of protection shall be considered included in the contract and no additional compensation will be allowed.

The contractor shall submit his/her method of maintaining channel flows, for approval by the Engineer, prior to beginning construction.


All construction joints shall be bonded unless otherwise noted.

GENERAL NOTES

Signs shall be made of 3/4" plywood or oxford, or of metal (18 ga.). The Contractor shall furnish all material and labor for constructing and erecting the signs. The signs shall be placed prior to the starting of actual construction operations at each end of the construction section or as directed by the Engineer. Before any sign is erected, it shall be approved by the Engineer as to its appearance and quality of construction. The signs shall remain in place and shall be maintained in satisfactory condition until the project is accepted by the department. The Contractor shall then remove the signs and the material will become his property.

The letters on the sign shall be black mechanical style on a white background and appropriate border lines.

Paid for as Wood Information Signs.

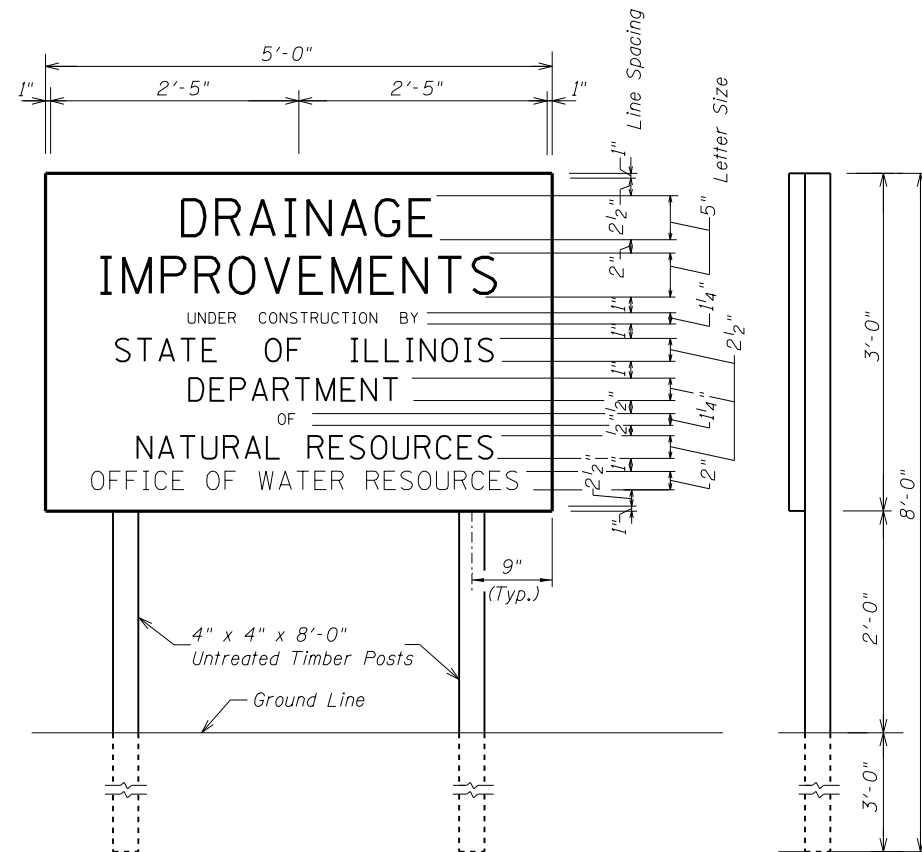

Designed By TMM checked by RLP
 Drawn By RJM checked by TMM
 O:\OwrProj\mpl\Projects\CrystalCreek II B\Plan Sheets\2 GeneralNotes and Utility References.dgn
 7/20/13 7:36:06 AM