


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
=	=	MADISON	7	6
STA. _____ TO STA. _____				
FED. ROAD DIST. NO. _____ ILLINOIS FED. AID PROJECT				
= E&U 9251 / F&S 1848 / FAU 9288				
= 27RS-2, 28, 29RS-2				

LOCATION		PAVEMENT MARKING SCHEDULE				RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	SHORT - TERM PAVEMENT MARKING	WORK ZONE PAVEMENT MARKING REMOVAL
		THERMOPLASTIC PAVEMENT MARKING				EACH	EACH	FOOT	SO FT
STATION	TO	4" LINE	12" LINE	24" LINE	LETTERS & SYMBOLS				
STATION	TO	FOOT	FOOT	FOOT	SO FT				
100+70	TO 103+20	500				3	3	136	45
103+20	TO 106+20	1200	111			15	15	327	109
106+20	TO 107+20	300		22	31	3	3	82	27
108+33	TO 109+33	300		22	16	3	3	82	27
109+33	TO 110+33	500			16	3	3	136	45
110+33	TO 111+50	492	97			6	6	134	45
112+24	TO 117+30				94	26	26	348	116
117+30	TO 119+11	724	80			9	9	197	66
119+11	TO 124+90					15	15	316	105
124+90	TO 125+80	23				1	1	6	2
125+80	TO 130+79					6	6	306	102
130+79	TO 143+00	1526				16	16	416	139
143+00	TO 148+54	1247				7	7	340	113
OMISSION - SN 082-0056									
148+95	TO 154+52	1253				7	7	342	114
154+52	TO 157+80		48						
154+52	TO 157+80	738				5	5	201	67
OMISSION @ FOX VALLEY ESTATES									
173+65	TO 175+00	304				2	2	83	28
OMISSION @ PREMIER DR.									
185+00	TO 215+47	6856				39	39	1870	623
215+47	TO 216+52	420				3	3	115	38
216+52	TO 222+50	3588	171			30	30	979	326
222+50	TO 224+80	1097		31		18	18	299	100
OMISSION @ GREENMOUNT RD.									
228+22	TO 230+44	1065			31	17	17	290	97
230+44	TO 236+78	3804	162			32	32	1037	346
236+78	TO 237+50	288				2	2	79	26
237+50	TO 243+16	2264				7	7	617	206
OMISSION - SN 082-0057									
253+41	TO 258+60	1687				7	7	460	153
258+60	TO 265+76	1611				9	9	439	146
265+76	TO 267+98	888				6	6	242	81
267+98	TO 271+45	2359	111			26	26	643	214
271+45	TO 273+02	743		47		12	12	203	68
273+02	TO 277+82	2880	125	31		24	24	785	262
277+82	TO 281+45	817				5	5	223	74
281+45	TO 287+90	2095				8	8	572	191
287+90	TO 316+00	6323				35	35	1724	575
316+00	TO 333+00	5525				22	22	1507	502
333+00	TO 355+83	5137				29	29	1401	467
OMISSION - SN 082-0058									
356+53	TO 391+45	7857				44	44	2143	714
391+45	TO 394+40	1180				8	8	322	107
TOTALS		71148	856	92	296	510	510	19404	6468

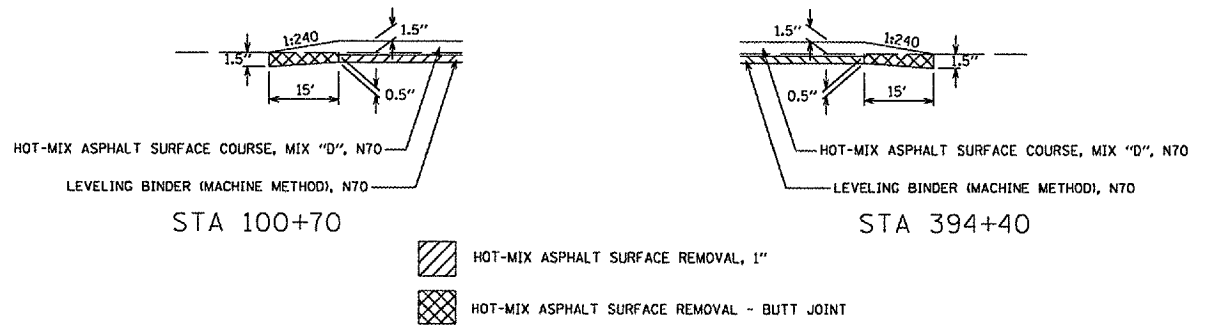

BUTT JOINT DETAILS

PATCHING SCHEDULE				
LOCATION	SAWCUTS	TIE BARS	CLASS B PATCHES, TYPE 11, 12 INCH	
STA	OFFSET	FT	EACH	SO YD
138+98	LT	48	20	8
147+62	RT	48	20	8
147+84	LT	48	20	8
	RT	48	20	8
150+27	LT	48	20	8
	RT	48	20	8
212+51	LT	48	20	8
	RT	48	20	8
212+76	LT	48	20	8
	RT	48	20	8
221+45	LT	57	20	10
	RT	57	20	10
233+99	LT	66	20	12
	RT	66	20	12
236+20	LT	44	20	5.3
	RT	44	20	5.3
254+79	LT	48	20	8
	RT	48	20	8
267+32	LT	48	20	8
	RT	48	20	8
277+76	LT	52	20	10.7
	RT	52	20	10.7
120+16	LT	48	20	8
	RT	48	20	8
310+91	LT	48	20	8
	RT	48	20	8
325+39	LT	48	20	8
	RT	48	20	8
391+05	LT	48	20	8
	RT	48	20	8
394+10	LT	48	20	8
	RT	48	20	8
394+83	LT	48	20	8
	RT	48	20	8
SUBTOTAL		1686	680	284
20% ANTICIPATED		337	136	57
TOTAL		2023	816	341

GUARDRAIL SCHEDULE					
LOCATION	FURNISHED EXCAVATION	TRAFFIC BARRIER TERMINAL TYPE 1, SPECIAL (TANGENT)	GUARDRAIL REMOVAL	GUARDRAIL MARKERS, TYPE A	TERMINAL MARKER - DIRECT APPLIED
	CU YD	EACH	FEET	EACH	EACH
SN 082-0056					
NE QUADRANT		1	12.5	4	1
NW QUADRANT	7	1	50	4	1
SW QUADRANT		1	12.5	4	1
TOTALS		7	75	12	3

PAVING SCHEDULE									
LOCATION	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	LEVELING BINDER (MACHINE METHOD), N70	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70	HOT-MIX ASPHALT SURFACE REMOVAL, 1"	STRIP REFLECTIVE CRACK CONTROL TREATMENT	AGGREGATE SHOULDERS, TYPE B	HOT-MIX ASPHALT SHOULDERS	
	TON	TON	TON	TON	SO YD	FOOT	TON	TON	
100+70 TO 120+50	5.9	28.5	399.0	798.0	9499.7	3960.0			
120+50 TO 125+80	0.9	4.2	59.3	118.7	1412.7	1060.0			
125+80 TO 130+79	0.8	4.0	55.9	111.8	1663.3	998.0	123.2	41.9	
130+79 TO 141+00	0.8	4.0	56.5	113.1	1346.0	2042.0			
141+00 TO 143+00	0.9	4.1	57.2	114.4	2042.4	2042.0	126.0		
143+00 TO 148+54	0.3	1.6	22.4	44.8	533.3	400.0			
148+54 TO 148+95	0.9	4.4	62.1	124.2	1847.7	1108.0	136.8	46.5	
148+95 TO 157+80	1.5	7.0	97.6	195.1	2912.7	1770.0	218.5	74.3	
157+80 TO 173+65	0.2	1.1	15.1	30.2	450.0	270.0	33.3	11.3	
173+65 TO 175+00									
175+00 TO 185+00	0.2	1.1	15.1	30.2	450.0	270.0	33.3	11.3	
185+00 TO 213+35	4.7	22.6	316.9	633.9	9436.2	5670.0	700.0	238.1	
213+35 TO 224+80	2.6	12.6	176.1	352.1	4446.6	4580.0	282.7	32.1	
224+80 TO 228+22									
228+22 TO 243+46	3.2	15.4	215.9	431.8	5479.6	6096.0	376.3	42.7	
243+46 TO 253+41									
253+41 TO 265+75	2.2	10.7	149.4	298.8	4380.0	2468.0	304.7	103.7	
265+75 TO 277+82	2.0	9.7	135.2	270.3	4291.3	4828.0	298.0	135.2	
277+82 TO 355+83	13.0	62.4	873.5	1747.0	25998.6	15602.0	1926.2	655.3	
355+83 TO 356+54									
356+54 TO 394+40	6.3	30.3	423.7	847.4	12612.6	7572.0	934.8	318.0	
TOTALS		46.4	222.6	3115.8	6231.7	88352.6	60466.0	5460.6	1699.2

FEATHEREDGE AND BUTT JOINT SCHEDULE						
LOCATION	TEMPORARY RAMP	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)	INCIDENTAL HOT-MIX ASPHALT SURFACING	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	
	SO YD	TON	TON	TON	SO YD	
100+70	BEGIN	13.3			60	
102+86	RT 158 WB	46.3	0.02	0.10		
107+82	RT 177 EB	48.1	0.02	0.11	5.1	
107+82	LT MCCLINTOCK	25.9	0.01	0.06	2.7	
109+70	LT ALLEY	11.1	0.01	0.03	1.2	
110+44	RT MONUMENT DR	25.9	0.01	0.06	2.7	
111+68	LT PATTERSON CT	18.5	0.01	0.04	1.9	
113+03	RT CEMETARY ENT	24.1	0.01	0.06	2.5	
114+33	RT PARK RD	14.8	0.01	0.03	1.6	
120+31	LT FOREST BLVD	29.6	0.01	0.07	3.1	
125+15	LT WABASH AVE	33.3	0.02	0.08	3.5	
125+15	RT WABASH AVE	33.3	0.02	0.08	3.5	
129+89	LT PORTLAND AVE	33.3	0.02	0.08	3.5	
134+48	RT SIDE RD	24.1	0.01	0.05	2.5	
138+24	LT PENN AVE	24.1	0.01	0.05	2.5	
142+83	LT GARDEN AVE	24.1	0.01	0.05	2.5	
152+19	RT GREEN MOUNT LANE	25.9	0.01	0.06	2.7	
154+50	RT SCHOOL ENT	22.2	0.01	0.05	2.3	
226+47	LT GREENMOUNT RD	101.9	0.05	0.23	10.7	
226+47	RT GREENMOUNT RD	83.5	0.04	0.19	8.8	
394+40	END	11.1			50	
TOTALS		674.4	0.3	1.6	68.3	110.0

*FEATHEREDGE - 10' MAXIMUM OR AS DIRECTED BY THE ENGINEER

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULES
NAME	DATE	
		FAU 9251 / FAS 1848 / FAU 9288 SECTION 27RS-2, 28, 29RS-2 ST. CLAIR COUNTY

SCALE: VERT. _____
HORIZ. _____
DATE _____ DRAWN BY _____
CHECKED BY _____

DATE: _____
FILE NAME: _____
REFERENCE: _____