

	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
123	07-00165-00-SW	COOK	7	2
PROJECT NUMBER		CMM-8003 (818)		
CONTRACT NUMBER		83922		



SUMMARY OF QUANTITIES				
CODE NO.	PAY ITEM	UNIT	TOTAL	SFTY 1B
20101000	TEMPORARY FENCE	FOOT	350	350
20101200	TREE ROOT PRUNING	EACH	6	6
20101350	TREE PRUNING (OVER 10 INCH DIAMETER)	EACH	9	9
20201200	REMOVAL & DISPOSAL OF UNSUITABLE MATERIAL	CU YD	250	250
20600110	GRANULAR EMBANKMENT, SPECIAL	TON	45	45
20800150	TRENCH BACKFILL	CU YD	90	90
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	3,000	3,000
25001020	SEEDING CLASS 2A (SPECIAL)	ACRE	0.100	0.100
25100630	EROSION CONTROL BLANKET	SQ YD	500	500
25200110	SODDING, SALT TOLERANT	SQ YD	2,500	2,500
25200200	SUPPLEMENTAL WATERING	UNIT	15	15
28000510	INLET FILTERS	EACH	13	13
28100103	STONE RIPRAP, CLASS A2	SQ YD	5	5
35101600	AGGREGATE BASE COURSE, TYPE B 4"	SQ YD	1,000	1,000
35800100	PREPARATION OF BASE	SQ YD	1,000	1,000
40603310	HOT-MIX ASPHALT SURFACE COURSE MIX C, N50	TON	35	35
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	5,650	5,650
42400300	PORTLAND CEMENT CONCRETE SIDEWALK 6 INCH	SQ FT	1,360	1,360
42400800	DETECTABLE WARNINGS	SQ FT	50	50
44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	340	340
44000600	SIDEWALK REMOVAL	SQ FT	250	250
48100500	AGGREGATE SHOULDER, TYPE A, 6"	SQ YD	150	150
50105225	PIPE CULVERT REMOVAL (SPECIAL)-12" CMP	FOOT	45	45
54213657	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 12"	EACH	1	1
54213660	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 15"	EACH	1	1
54247100	GRATING FOR CONCRETE FLARED END SECTION, 15 INCH	EACH	1	1
550B0050	STORM SEWERS, CLASS B, TYPE 1 12"	FOOT	85	85
550B0070	STORM SEWERS, CLASS B, TYPE 1 15"	FOOT	119	119
56400100	FIRE HYDRANTS TO BE MOVED	EACH	3	3
60200105	CATCH BASINS, TYPE A, 4' -DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	1	1
60200205	CATCH BASINS, TYPE A, 4' -DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	2	2
60206905	CATCH BASINS, TYPE C, TYPE 1 FRAME, OPEN LID	EACH	2	2
60207005	CATCH BASINS, TYPE C, TYPE 1 FRAME, CLOSED LID	EACH	1	1
60207605	CATCH BASINS, TYPE C, TYPE 8 GRATE	EACH	7	7
60218400	MANHOLES, TYPE A, 4' -DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	1	1
67100100	MOBILIZATION	L SUM	1	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	1
78000400*	THERMOPLASTIC PAVEMENT MARKING-LINE 6"	FOOT	80	80
X0325015	ADJUST FRAME AND LID	EACH	2	2
X4400220	CURB REMOVAL AND REPLACEMENT	FT	22	22
X5403817	GRATING FOR CONCRETE FLARED END SECTION, 12 INCH	EACH	1	1
X5427600	REMOVE AND RELOCATE CONCRETE END SECTIONS, 15 INCH	EACH	1	1
X0322917	PROPOSED STORM SEWER CONNECTION TO EXISTING MANHOLE	EACH	1	1
X0323697	RUSTIC RAIL FENCE REMOVAL	FOOT	20	20
Z0013798	CONSTRUCTION LAYOUT	L SUM	1	1
Z0051500	REMOVING AND RESETTING STREET SIGNS	EACH	3	3
XX000610	RELOCATE EXISTING MAIL BOX	EACH	2	2
XX001910	PRECAST BLOCK RETAINING WALL	SQ FT	70	70
XX005656	INLET FILTER CLEANING	EACH	26	26
XX006986	STORM SEWER DUCTILE IRON PIPE, TYPE 1, 8 INCH	FOOT	96	96
	* SPECIALTY ITEMS			

**BENCH MARK:**

RAILROAD SPIKE IN THE WEST FACE OF A POWER POLE ON THE WEST SIDE OF THE GREEK ORTHODOX CHURCH PARKING LOT (AT THE NORTHWEST CORNER OF PARKING LOT)  
ELEVATION = 632.46

**NOTE #1:**

SIDEWALK CROSS SLOPE 2.0% TYPICAL, EXCEPT WHERE OTHERWISE SHOWN ON PLANS OR DIRECTED BY THE ENGINEER

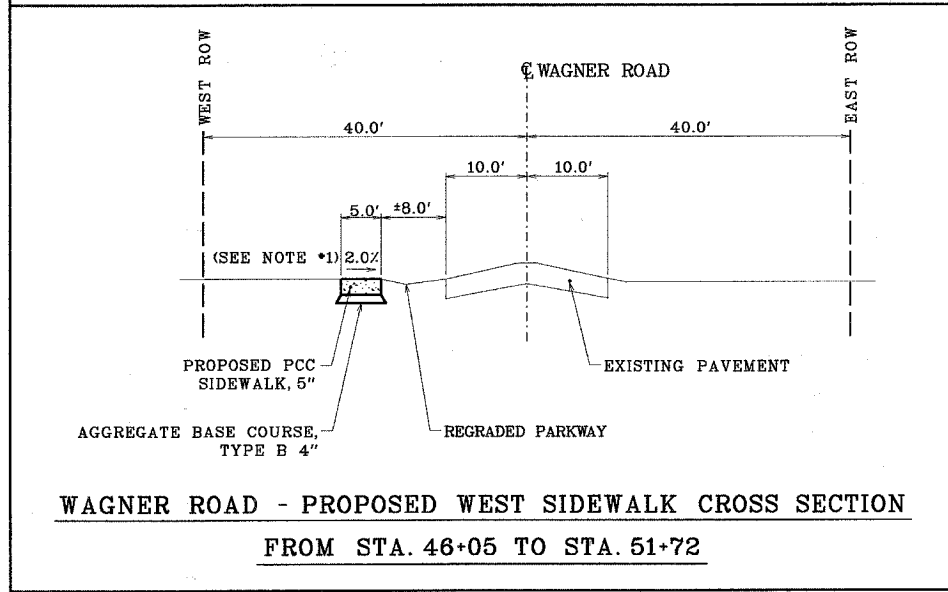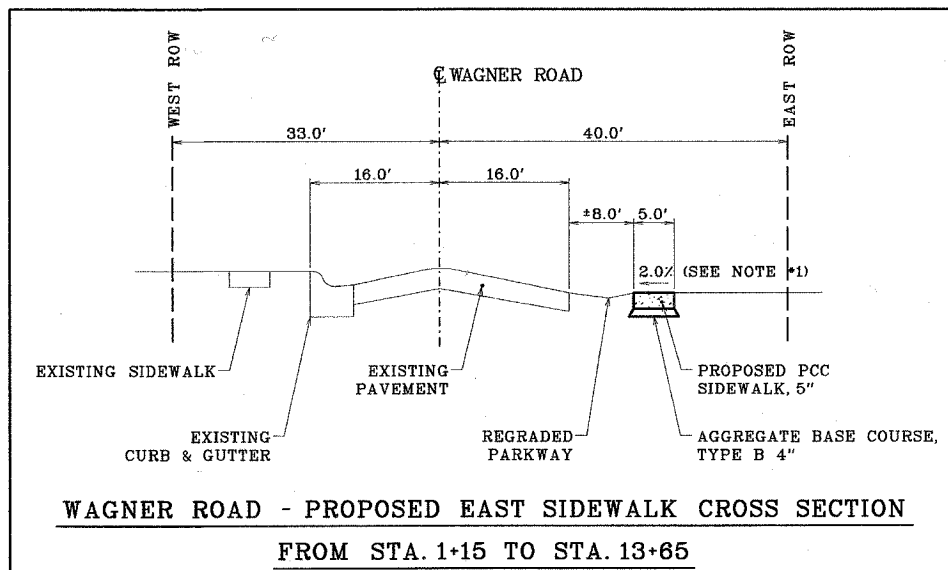

**HOT-MIX ASPHALT MIXTURE REQUIREMENTS**

ITEM	AC TYPE	PERCENT AIR VOIDS	MIX TYPE	MAX RAP %	UNIT WEIGHT LBS/SQ YD/IN
3.0" HOT-MIX ASPHALT SURFACE COURSE MIX "C", N50	PG 64-22	4% @ 50 Gyr.	IL 9.5 mm	15	112

**NOTE:** THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURES IS 112 LBS/SQ YD/IN.

WAGNER ROAD SIDEWALK IMPROVEMENTS				SHEET <b>2</b>
GLENVIEW, ILLINOIS				
SUMMARY OF QUANTITIES & SECTIONS				OF 7
05-14-07	E.L.	IDOT COMMENTS		DATE 03-22-07
04-02-07	E.L.	IDOT COMMENTS		
DATE	BY	REVISION		