

F. A. U. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	06-00082-00-BR	COOK	009	002
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

S.I. CODE NO.	PAY ITEM	UNIT	QUAN	CONSTRUCTION TYPE CODE		
				SIDEWALKS	SIGNS	LANDSCAPE
				SFTY-1B	Y002-1C	Y003
20200100	EARTH EXCAVATION	CU YD	50	50		
20700400	POROUS GRANULAR EMBANKMENT, SPECIAL	CU YD	2	2		
* 21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	100			100
* 25000300	SEEDING, CLASS 3	ACRE	0.04			0.04
* 25100630	EROSION CONTROL BLANKET	SQ YD	200			200
* 25200110	SODDING, SALT TOLERANT	SQ YD	100			100
* C2001736	SHRUB, CORNUS SERICEA CARDINAL (CARDINAL REDOSIER DOGWOOD), 3' CONTAINER	EACH	2			2
28000400	PERIMETER EROSION BARRIER	FOOT	120	120		
35101400	AGGREGATE BASE COURSE, TYPE B	TON	18	18		
40600100	BITUMINOUS MATERIAL (PRIME COAT)	GALLON	16	16		
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	6	6		
44000100	PAVEMENT REMOVAL	SQ YD	43	43		
50200100	STRUCTURE EXCAVATION	CU YD	2	2		
50300225	CONCRETE STRUCTURES	CU YD	6.9	6.9		
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	722	722		
51500110	NAME PLATES (SPECIAL)	EACH	1	1		
58700200	BRIDGE SEAT SEALER	SQ FT	57	57		
63100045	TRAFFIC BARRIER TERMINAL, TYPE 2	EACH	1	1		
63200305	STEEL PLATE BEAM GUARD RAIL REMOVAL	FOOT	25	25		
67100100	MOBILIZATION	L SUM	1	1		
70101800	TRAFFIC CONTROL AND PROTECTION (SPECIAL)	L SUM	1	1		
72000100	SIGN PANEL - TYPE 1	SQ FT	14			14
72900100	METAL POST - TYPE A	FOOT	20			20
73400200	DRILLED SHAFT CONCRETE FOUNDATIONS	CU YD	5.4	5.4		
XX001249	ORNAMENTAL FENCE	FOOT	55	55		
XX001290	CONCRETE BOLLARDS	EACH	2	2		
XX004056	MECHANICALLY STABILIZED EARTH RETAINING WALL	SQ FT	10.5	10.5		
X0322508	PEDESTRIAN TRUSS SUPERSTRUCTURE	SQ FT	575	575		
X0322879	GRADING AND SHAPING FORESLOPES	SQ YD	200	200		
Z0076800	TURF REINFORCEMENT MAT	SQ YD	14	14		

* - INDICATES SPECIALTY ITEMS

GENERAL NOTES:

ROBINSON ENGINEERING, LTD. FIELD OFFICE SHALL BE NOTIFIED TWO (2) WORKING DAYS BEFORE CONSTRUCTION BEGINS. CALL (708) 331-6700. CONTRACTOR SHALL ALSO NOTIFY VILLAGE OF SOUTH HOLLAND PUBLIC WORKS DIRECTOR, MR. FRANK KNITTLE, AT (708) 210-2915

AREAS DISTURBED BY CONSTRUCTION SHALL BE KEPT TO A MINIMUM. ALL AREAS DISTURBED UNNECESSARILY SHALL BE RESTORED AS REQUIRED IN THE SPECIAL PROVISIONS AT THE CONTRACTOR'S EXPENSE.

UTILITIES INDICATED ON THE PLANS ARE PROVIDED FOR THE CONTRACTOR'S USE, AND ARE BASED UPON INFORMATION AVAILABLE AT THE TIME OF THE ADVERTISEMENT FOR BIDS. THE OWNER AND ENGINEER DO NOT GUARANTEE THE ACCURACY OF UTILITIES INFORMATION. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY J.U.L.I.E. AT LEAST 48 HOURS PRIOR TO EXCAVATION TO VERIFY LOCATIONS OF ALL UTILITIES.

EXISTING DRAINAGE FACILITIES SHALL NOT BE UNNECESSARILY DISTURBED. THE CONTRACTOR IS HEREBY ALERTED TO THE POTENTIAL FOR EXISTING FIELD DRAIN TILES NOT SHOWN ON THE PLANS, AND SHALL TAKE GREAT CARE IN MINIMIZING DISRUPTION TO SUCH FACILITIES. THE CONTRACTOR SHALL PROVIDE TEMPORARY DRAINAGE FACILITIES WHEREVER NECESSARY TO MAINTAIN DRAINAGE. WORK NOT COVERED BY SPECIFIC PAY ITEMS SHALL BE INCIDENTAL TO THE CONTRACT.

THE SOUTH HOLLAND DEPARTMENT OF PUBLIC WORKS SHALL BE NOTIFIED PRIOR TO THE OPENING OR CLOSING OF ALL WATER VALVES, FIRE HYDRANTS AND/OR OTHER WATER SYSTEM APPURTENANCES.

CONTRACTOR SHALL BE RESPONSIBLE AT ALL TIMES FOR TRAFFIC CONTROL AND PROTECTION IN ACCORDANCE WITH THE ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS IN EFFECT ON THE DATE OF THE INVITATION FOR BIDS, THE "STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS", ADOPTED JANUARY 1, 2004.





FERTILIZER NUTRIENTS INTENTIONALLY OMITTED.

TEMPORARY STABILIZATION SHALL BE PROVIDED AT THE CONTRACTORS EXPENSE FOR ANY AREAS OF BARE SOIL EXPOSED FOR MORE THAN 14 DAYS.

HOT-MIX ASPHALT SCHEDULE

MIX TYPE	AC TYPE	DESIGN AIR VOIDS
HOT-MIX ASPHALT, SURFACE COURSE, MIX "C", N50 (IL 9.5mm)	PG 64-22	4% AT 50 GYRATIONS

"THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE IS 112 lbs/sq yd/ in."

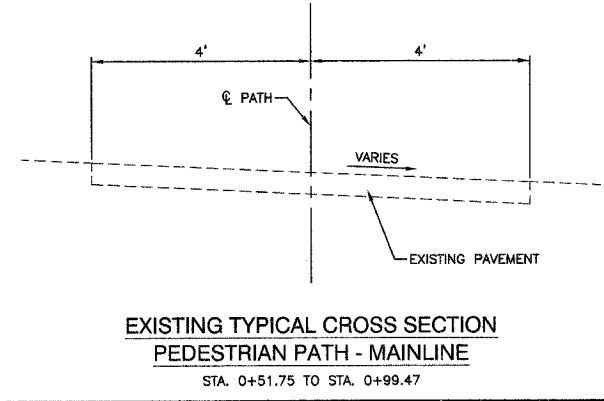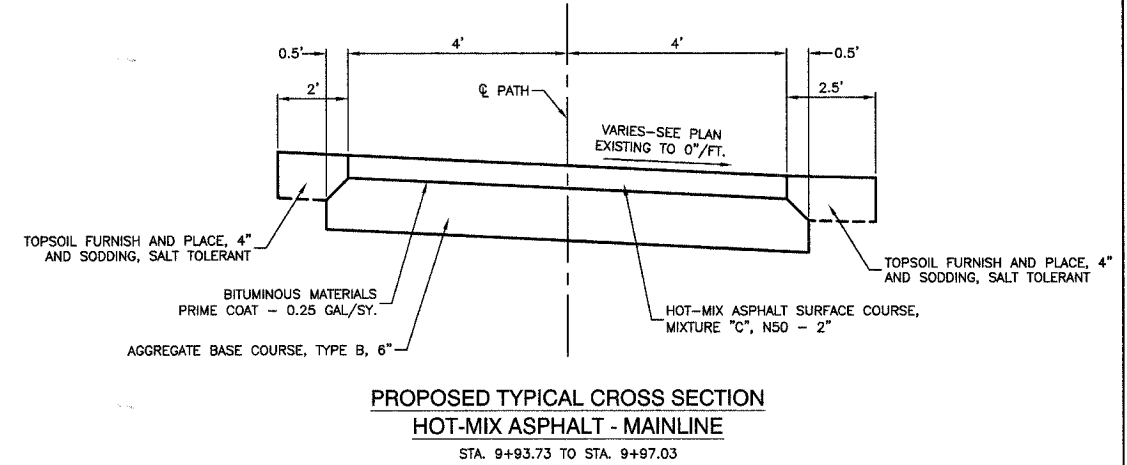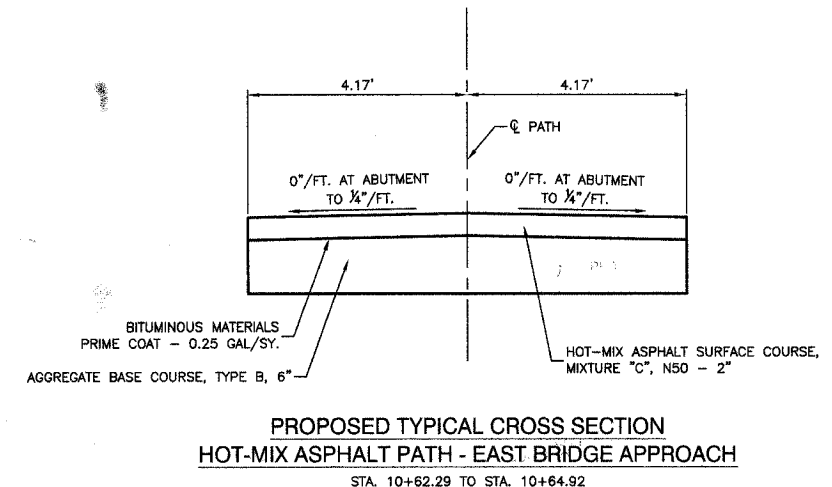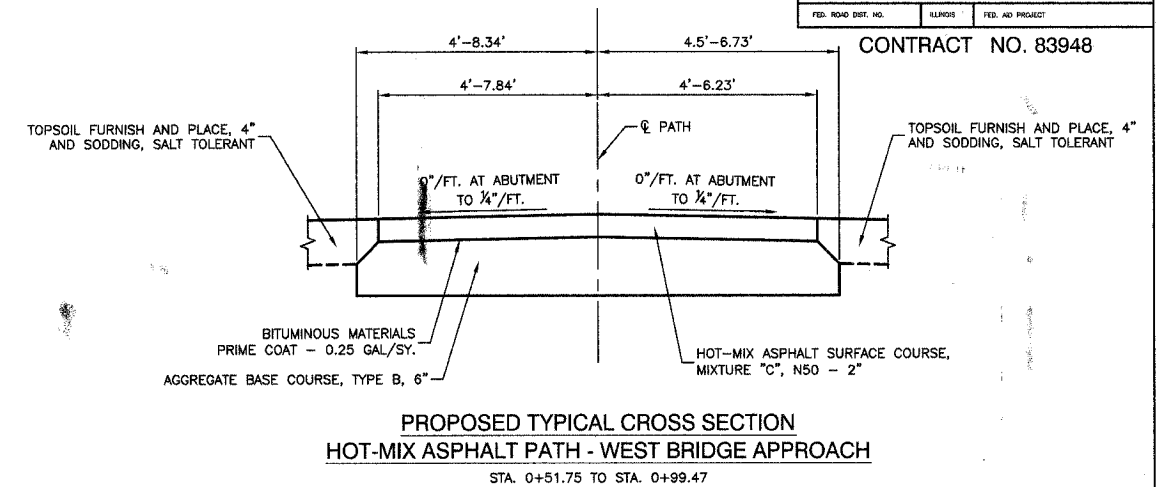

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**PEDESTRIAN BRIDGE
SUMMARY OF QUANTITIES,
GENERAL NOTES, AND
TYPICAL CROSS SECTIONS**

SCALE: VERT. N/A
HORIZ. N/A
DATE 5-16-07

DRAWN BY EC
CHECKED BY PKB

ROBINSON ENGINEERING, LTD.
1700 SOUTH PARK AVENUE SOUTH HOLLAND, ILLINOIS 60473
(708) 351-9749 FAX (708) 351-1886
ILLINOIS DESIGN FIRM REGISTRATION NO. 181601128 04389-QUAN-01 - P01