

INDEX OF SHEETS

- 1 COVER SHEET
- 2 TYPICAL SECTIONS
- 3 MATERIAL SCHEDULES
TYPICAL DETAILS
- 4-5 STORM WATER PPP
- 6-14 PLAN/PROFILE SHEETS
- 15-25 CROSS SECTIONS

SUMMARY OF QUANTITIES

CODE NO.	PAY ITEM	UNIT	TOTAL
20200100	EARTH EXCAVATION	CU YD	2,850
20400100	BORROW EXCAVATION	CU YD	9,600
20800150	TRENCH BACKFILL	CU YD	192
25001000*	SEEDING CLASS 2 (SPECIAL)	ACRE	6
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	600
28000300	TEMPORARY DITCH CHECKS	EACH	40
28000400	PERIMETER EROSION BARRIER	FOOT	1200
28000500	INLET AND PIPE PROTECTION	EACH	13
28100805	STONE DUMPED RIPRAP, CLASS A3	TON	1385
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	50
40300100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	2,000
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	80
40600990	TEMPORARY RAMP	SQ YD	80
40603085	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70	TON	3,150
40603315	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N70	TON	1,400
50105220*	PIPE CULVERT REMOVAL	FOOT	396
54200433	PIPE CULVERTS, TYPE 1 RCCP 18"	FOOT	7
54200439	PIPE CULVERTS, TYPE 1 RCCP 24"	FOOT	30
54200637	PIPE CULVERTS, TYPE 1, CORRUGATED STEEL OR ALUMINUM CULVERT PIPE 12"	FOOT	70
54200640	PIPE CULVERTS, TYPE 1, CORRUGATED STEEL OR ALUMINUM CULVERT PIPE 15"	FOOT	38
54200643	PIPE CULVERTS, TYPE 1, CORRUGATED STEEL OR ALUMINUM CULVERT PIPE 18"	FOOT	188
54201273	PIPE CULVERTS, TYPE 2 RCCP 18"	FOOT	122
54202119	PIPE CULVERTS, TYPE 3 RCCP 24"	FOOT	100
54213663	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 18"	EACH	6
54213669	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 24"	EACH	8
54215547	METAL END SECTIONS 12"	EACH	4
54215550	METAL END SECTIONS 15"	EACH	4
54215553	METAL END SECTIONS 18"	EACH	6
54248515*	CONCRETE COLLAR	EACH	10
54390130	INSERTION CULVERT LINER 16"	FOOT	104
54390170	INSERTION CULVERT LINER 22"	FOOT	156
67100100	MOBILIZATION	L SUM	1
70103700	TRAFFIC CONTROL COMPLETE	L SUM	1
72000100	SIGN PANEL - TYPE 1	SQ FT	51
72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	108
78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	23,880
X2010505*	CLEARING, SPECIAL	L SUM	1

△ SPECIALTY ITEMS


STANDARDS

280001-03	TEMPORARY EROSION CONTROL	701311-02	TRAFFIC CONTROL
701006-02	TRAFFIC CONTROL	702001-06	TRAFFIC CONTROL DEVICES
701011-01	TRAFFIC CONTROL	720001	SIGN PANEL MOUNTING
701201-02	TRAFFIC CONTROL	720006-01	SIGN PANEL ERECTION
701301-02	TRAFFIC CONTROL	780001-01	PAVEMENT MARKINGS
701306-01	TRAFFIC CONTROL		


STATE OF ILLINOIS GALLATIN COUNTY

PLANS FOR PROPOSED LOCAL AGENCY IMPROVEMENT

C. H. 13 (FAS ROUTE 934)
SECTION 04-00069-00-RS
PROJECT NO. FH - 17 (101)
JOB NO. C-99-530-05

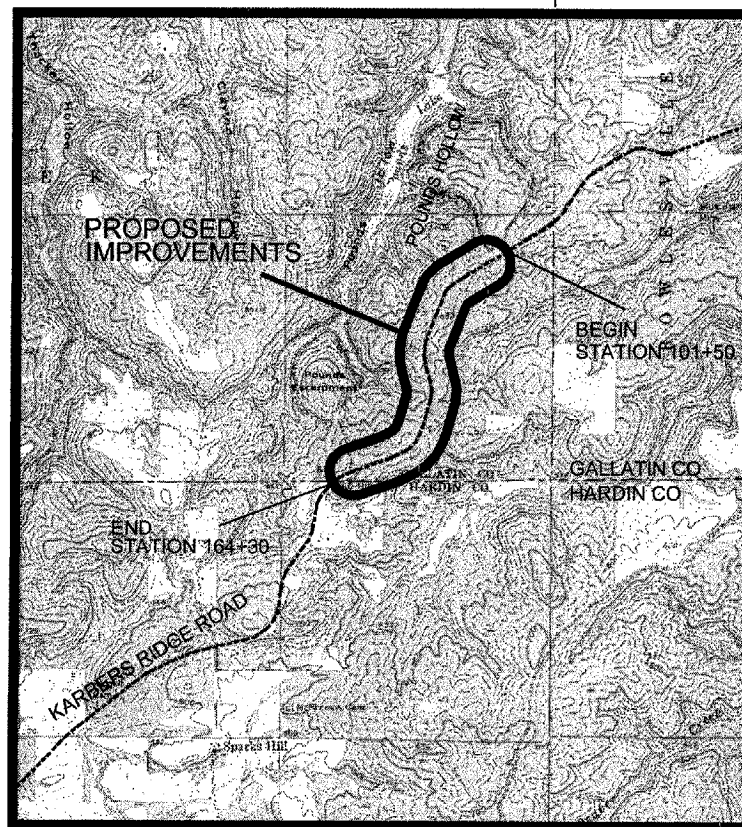

LOCATION MAP 1 Inch = 2000 Feet
LENGTH OF IMPROVEMENTS = 5,970 Feet (1.13 Miles)

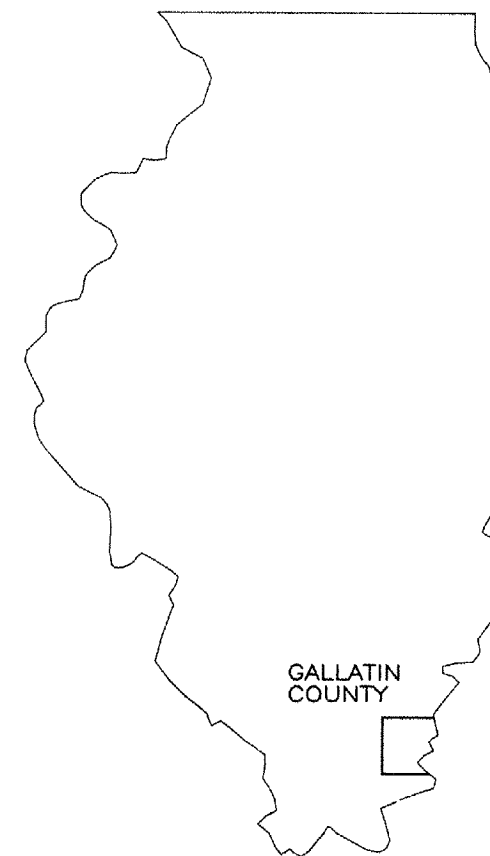

STRUCTURAL DESIGN DATA

DESIGN TRAFFIC (2006):
ADT - PV=445; SU=15; MU=10
CLASS III D.P. - 20 YR

ALL EXISTING UTILITIES AND LOCATIONS TO BE
CONFIRMED BY J.U.L.I.E. 800-892-0123

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

APPROVED 5/21 2007

Joni W. Brown
LOCAL AGENCY REPRESENTATIVE

PASSED May 22 2007

Dennis W. Hillbrun
ENGINEER OF LOCAL STREETS AND ROADS

RELEASED FOR BID May 22 2007

BASED ON Mary C. Lamie
LIMITED REVIEW
MARY C. LAMIE, P.E.
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER

Michael W. Roberts

MICHAEL W. ROBERTS MAY 19, 2007
ILLINOIS REGISTERED PROFESSIONAL ENGINEER
NUMBER 62-40888
EXPIRES NOV. 30, 2007

