


**HALF SIDE ELEVATION**

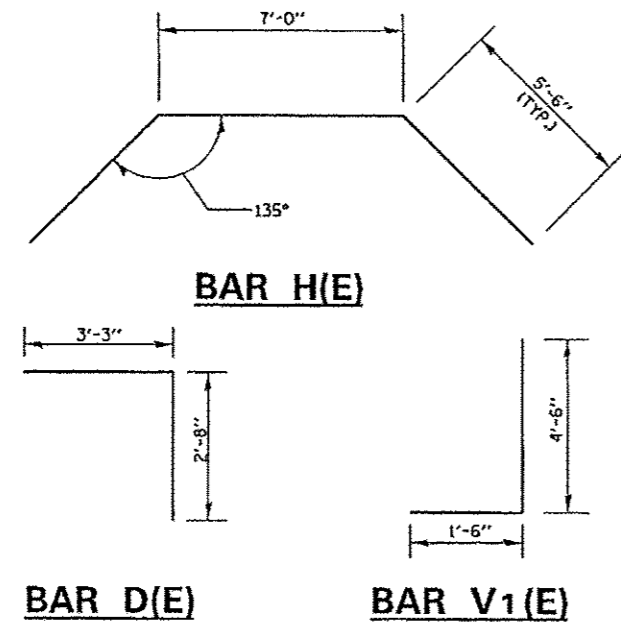

**BAR H(E)**

**BAR S(E)**

**BAR D(E)**

**BAR V1(E)**

**BILL OF MATERIAL (BOTH APRONS)**

Bar	No.	Size	Length	Shape
B(E)	12	#4	15'-5"	
D(E)	22	#4	5'-11"	J
H(E)	2	#4	18'-0"	
H1(E)	12	#4	5'-8"	
S(E)	4	#4	23'-5"	
V1(E)	24	#4	6'-0"	
<b>CONCRETE BOX CULVERTS</b> CU. YD. 8.0				
<b>REINFORCEMENT BARS, EPOXY COATED</b> POUND 440				

REINFORCEMENT BARS DESIGNATED (E) SHALL BE EPOXY COATED.  
 \* CUT OR BEND TO FIT  
 WORK THIS SHEET WITH SHEET 9 OF 9

**CAST-IN-PLACE  
 APRON END SECTION DETAILS  
 PERRY COUNTY  
 STRUCTURE NO. 073-7075**

FILE NAME 0:\pwwork\pwr\dts\halssteadw\08380771\750322-shr-plan.dwg	USER NAME halssteadw	DESIGNED TWH	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	CAST-IN-PLACE APRON END SECTION (SN 073-7075)	F.A.P. RATE 322	SECTION 6(I-1)(K)-11	COUNTY PERRY	TOTAL SHEETS 9	SHEET NO. 8	
	PLOT SCALE 1/64800"	CHECKED -	REVISED -			SCALE	SHEET	OF	SHEETS	STA.	TO STA.
PLOT DATE 8/16/2012	DATE -	REVISED -	CONTRACT NO. 78322								