

CONSTRUCTION PLANS FOR CASEY MUNICIPAL AIRPORT

CASEY, CLARK COUNTY, ILLINOIS


REHABILITATE EAST SIDE OF APRON AND THE T-HANGAR PAVEMENT

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR201660	BITUMINOUS CRACK REPAIR	LIN. FT.	1,600	
AR209510	CRUSHED AGGREGATE BASE COURSE	TON	155	
AR209650	AGGREGATE BASE PREPARATION	SQ. YD.	1,051	
AR401613	BIT. SURF. CSE.-METHOD I, SUPERPAVE	TON	1,096	
AR401650	BITUMINOUS PAVEMENT MILLING	SQ. YD.	4,488	
AR401901	REMOVE BITUMINOUS SURFACE COURSE	SQ. YD.	1,051	
AR602510	BITUMINOUS PRIME COAT	GAL.	368	
AR603510	BITUMINOUS TACK COAT	GAL.	615	
AR620520	PAVEMENT MARKING-WATERBORNE	SQ. FT.	254	

ILLINOIS PROJECT NO. 1H8-4137
AIP PROJECT NO. 3-17-0014-B10

JUNE 29, 2012

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	TYPICAL SECTIONS
4	APRON PAVEMENT LAYOUT AND ELEVATIONS
5	T-HANGAR ACCESS PAVEMENT LAYOUT AND ELEVATIONS

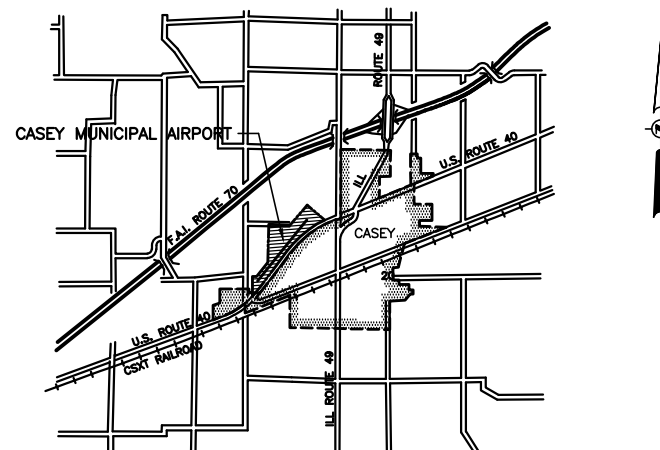

VICINITY MAP

	PLANS PREPARED BY : HUTCHISON ENGINEERING, INC. JACKSONVILLE, ILLINOIS	CITY OF CASEY, ILLINOIS
	SUBMITTED <i>Gary L. Hutchison</i> DATE <u>5/15/12</u>	APPROVED <i>Scott E. ...</i> MAYOR DATE <u>May 30, 2012</u>