

CONTRACT NO. 76441 COUNTY TOTAL SHEET NO. 600 34RS-2 MADISON 39 9 TO STA.\_\_\_\_ STA. FED. ROAD DIST. NO. \_ ILLINOIS FED. AID PROJECT

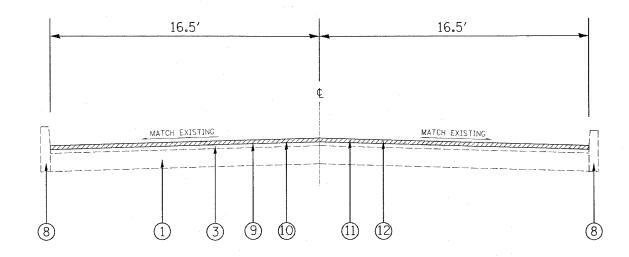

## TYPICAL SECTION STA 1004+28.00 TO STA 1025+44.00

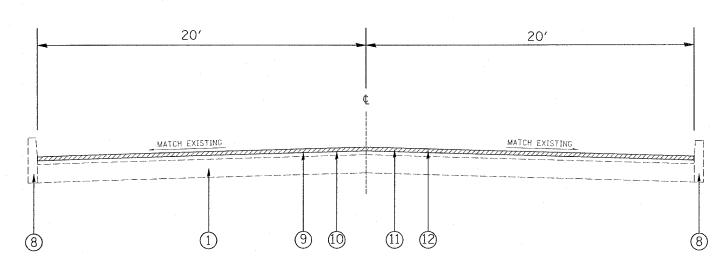

## TYPICAL SECTION


STA 1028+62.00 TO STA 1028+74.37 STA 77+27.61 TO STA 88+10.00 (STATION EQUATION: 1028+74.37 = 77+27.61)

## LEGEND

1	EXISTING PCC PAVEMENT, 7"
2	EXISTING BITUMINOUS BASE COURSE, 8'-6"
(3)	EXISTING BITUMINOUS RESURFACING, 3.5"
( <del>4</del> )	EXISTING BITUMINOUS RESURFACING, 4.5"
<u>(5)</u>	EXISTING BITUMINOUS SHOULDERS, 8"
<u>(6)</u>	EXISTING CONCRETE CURB AND GUTTER TY. B-6.24
(7)	EXISTING TYPE B GUTTER
(8)	EXISTING TYPE B CURB
9	PROPOSED AGGREGATE MATERIALS (PRIME COAT)
(i)	PROPOSED BITUMINOUS MATERIALS (PRIME COAT)
(11)	PROPOSED BITUMINOUS SURFACE REMOVAL. 1.5"
12	PROPOSED BITUMINOUS CONCRETE SURFACE COURSE SUPERPAVE, MIX D. N90

(3) PROPOSED BITUMINOUS SHOULDERS SUPERPAVE 1.5" 14 PROPOSED STRIP REFLECTIVE CRACK CONTROL

NOTE: THE INTENT OF THE MILLING IS TO REMOVE 11/2" OF THE EXISTING SURFACE AND REPLACE WITH 11/2" OF BITUMINOUS FONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N90



ARev. 7-18-06