


SIGN SCHEDULE

ALIGNMENT	EX STATION	OFFSET (FT)	ASSEMBLY REMOVAL TYPE	PROP STATION	OFFSET (FT)	MOUNTING	SIGN PANEL INFORMATION				SUPPORT INFORMATION				SIGN DESCRIPTION	
							TYPE	WIDTH (FT)	HEIGHT (FT)	AREA (SQ FT)	POST QUANTITY	WOOD POST SIGN SUPPORT LENGTH (FT)	METAL POST LENGTH TYPE B (FT)	STRUCTURAL STEEL SIGN SUPPORT BREAKAWAY (POUND)		STRUCTURAL STEEL SIGN SUPPORT BREAKAWAY- POST TYPE
NB KEDZIE	513+50	46' RT	A	513+50	36.08' RT	METAL POSTS	1	2.5	2.5	6.25	2		33			W8-1102: WARNING - WATCH FOR ICE ON BRIDGE
NB KEDZIE	515+19	48' RT	A	513+50	36.08' RT	METAL POST	1	1.5	2	3	0		0			W1-8(L): CHEVRON
NB KEDZIE	518+29	40' RT	A	514+70	36.32' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE	521+19	43' RT	A	515+90	35.78' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE				517+10	32.97' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE				518+30	30.30' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE				519+50	30.26' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE				520+70	30.37' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE				521+90	30.41' RT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
NB KEDZIE	528+58	43' RT	A	528+58	34.13' RT	METAL POSTS	1	2.5	2.5	6.25	2		30			W2-2L: SIDE ROAD INTERSECTION WARNING
NB KEDZIE	528+58	43' RT	A	528+58	34.13' RT	METAL POSTS	1	3	0.67	2.01	0		0			W16-8P: COUNTRY AIRE DR.
NB KEDZIE	529+61	46' RT	A	529+61	36.42' RT	METAL POSTS	1	2.5	2.5	6.25	1		27			W3-3: TRAFFIC SIGNAL AHEAD
NB KEDZIE	531+70	47' RT	A	531+70	37.08' RT	METAL POST	1	1	1.5	1.5	1		14			R7-2(M): NO PARKING ANY TIME
SB KEDZIE	531+87	38' LT	A	532+75	37.64' LT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
SB KEDZIE	530+73	33' LT	A	531+55	37.58' LT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
SB KEDZIE	528+75	31' LT	A	530+35	37.58' LT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
SB KEDZIE				529+15	34.24' LT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
SB KEDZIE				527+95	37.22' LT	METAL POST	1	1.5	2	3	1		13			W1-8(L): CHEVRON
SB KEDZIE	525+82	24' LT	A	525+82	28.50' LT	METAL POST	1	1	1.5	1.5	1		14			R7-2(M): NO PARKING ANY TIME
SB KEDZIE	521+95	26' LT	B	521+95	30.08' LT	METAL POST	1	3	3	9	2		30			W11-3: WILD LIFE CROSSING
SB KEDZIE	521+95	26' LT	B	521+95	30.08' LT	METAL POST	1	2	1.5	3	0		0			WR-3A: NEXT 1/2 MILE
SB KEDZIE	518+78	29' LT	A	518+78	30.08' LT	METAL POSTS	1	2.5	2.5	6.25	2		30			W3-3: TRAFFIC SIGNAL AHEAD
SB KEDZIE	516+78	32' LT	A	516+78	34.11' LT	METAL POSTS	1	3	0.67	2.01	2		0			W16-8P: ADVANCE STREET NAME - 155TH ST
SB KEDZIE	515+29	33' LT	A	515+29	36.08' LT	METAL POST	1	1.5	2	3	1		13			ASSEMBLY OF LOVE FULL GOSPEL CENTER
NB I-57	1222+50	81' RT	A	1222+50	81.00' RT	WOOD POSTS	1	4.5	1.5	6.75	2	27				D3-1: KEDZIE AVE
SB I-57	1223+65	75' LT	A	1223+65	75.00' LT	WOOD POSTS	1	4.5	1.5	6.75	2	27				D3-1: KEDZIE AVE
NB I-57	1222+61	OVERHEAD	N/A	1222+00	98.00' RT	BREAKAWAY	3	24.5	14.5	355.25	3		2190	W14X30	5.70	EXIT 350, 147TH ST - SIBLEY BLVD 1 MILE
SB I-57	1223+50	OVERHEAD	N/A	1224+00	91.50' LT	BREAKAWAY	3	11	13.5	148.5	2		1650	W14X30	3.80	EXIT 348, 159TH ST 3/4 MILES
SB I-57	1223+50	OVERHEAD	N/A	1224+00	102.50' LT	BREAKAWAY	3	11	13.5	148.5	2		1470	W14X30	3.80	EXIT 346, 167TH ST 1 3/4 MILES

•REMOVAL OF BRIDGE MOUNTED SIGNS SHALL BE INCLUDED WITH REMOVAL OF EXISTING STRUCTURES, AND SHALL NOT BE PAID FOR SEPARATELY.

NOTES:

1. ALL PROPOSED SIGNS SHALL HAVE TYPE "ZZ" RETROFLECTIVE SHEETING.
2. ALL EXISTING SIGN PANEL ASSEMBLIES TO BE REMOVED SHALL BE REPLACED WITH NEW SIGN PANELS AND POSTS AT THE PROPOSED LOCATIONS.

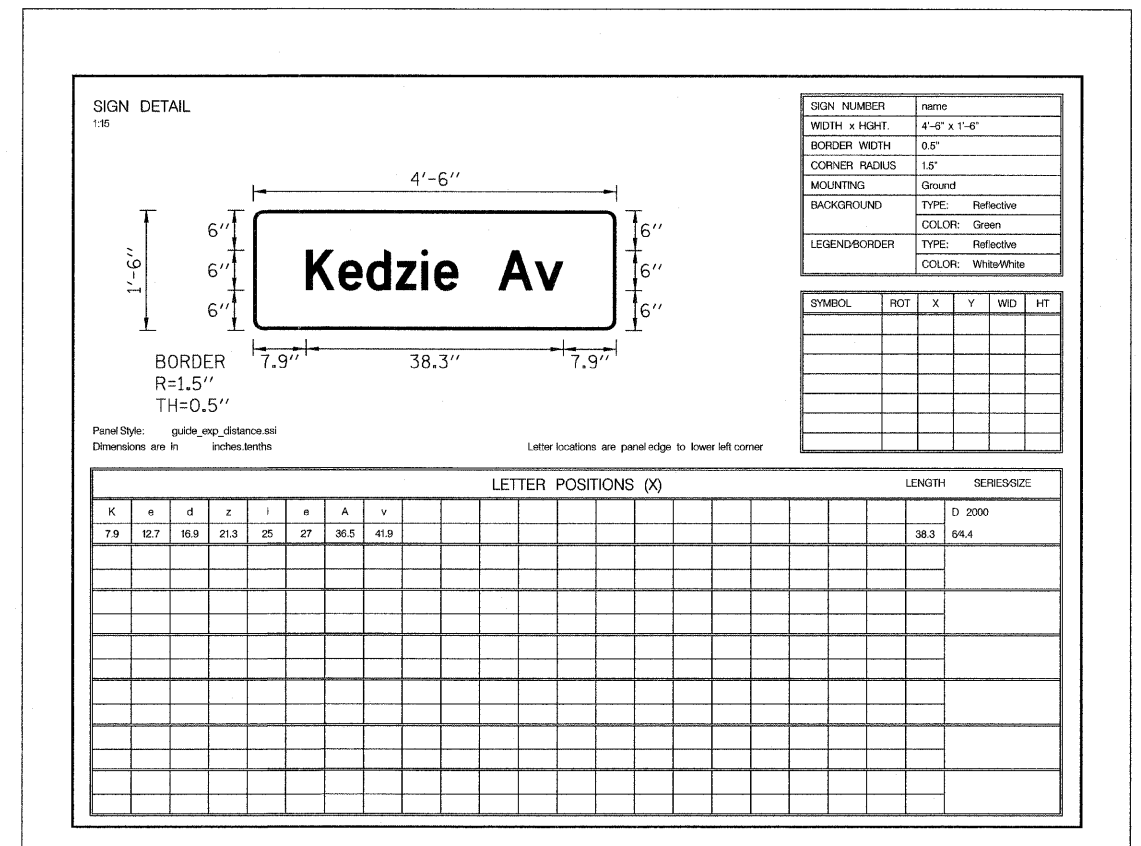

TYLIN INTERNATIONAL	USER NAME = #USER#	DESIGNED - JDU	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	KEDZIE AVENUE PROJECT SIGNING SCHEDULE		F.A. RTE. 57	SECTION 1313.1B-1	COUNTY COOK	TOTAL SHEETS 162	SHEET NO. 57
	PLOT SCALE = #SCALE#	CHECKED - SES	REVISED -		SCALE: N/A	SHEET NO. 1 OF 1 SHEETS	STA. TO STA.	FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT		CONTRACT NO. 60K14	
	PLOT DATE = 4/29/2011	DATE - 5/5/2011	REVISED -								