


SUMMARY OF QUANTITIES

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTR. CODE
				ROADWAY 0005
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	1120	1120
40600300	AGGREGATE (PRIME COAT)	TON	14	14
40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	100	100
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	67	67
40603080	HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50	TON	882	882
40603335	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	TON	588	588
44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD	140	140
67100100	MOBILIZATION	L SUM	1	1
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1
70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	L SUM	1	1
* 78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	8557	8557
Z0030850	TEMPORARY INFORMATION SIGNING	SQ FT	78	78
X4400196	HOT-MIX ASPHALT SURFACE REMOVAL, SPECIAL	SQ YD	7003	7003
X4811300	AGGREGATE SHOULDERS, TYPE B (SPECIAL)	TON	200	200
X7030200	SHORT-TERM PAVEMENT MARKING (SPECIAL)	FOOT	1597	1597

* SPECIALTY ITEMS

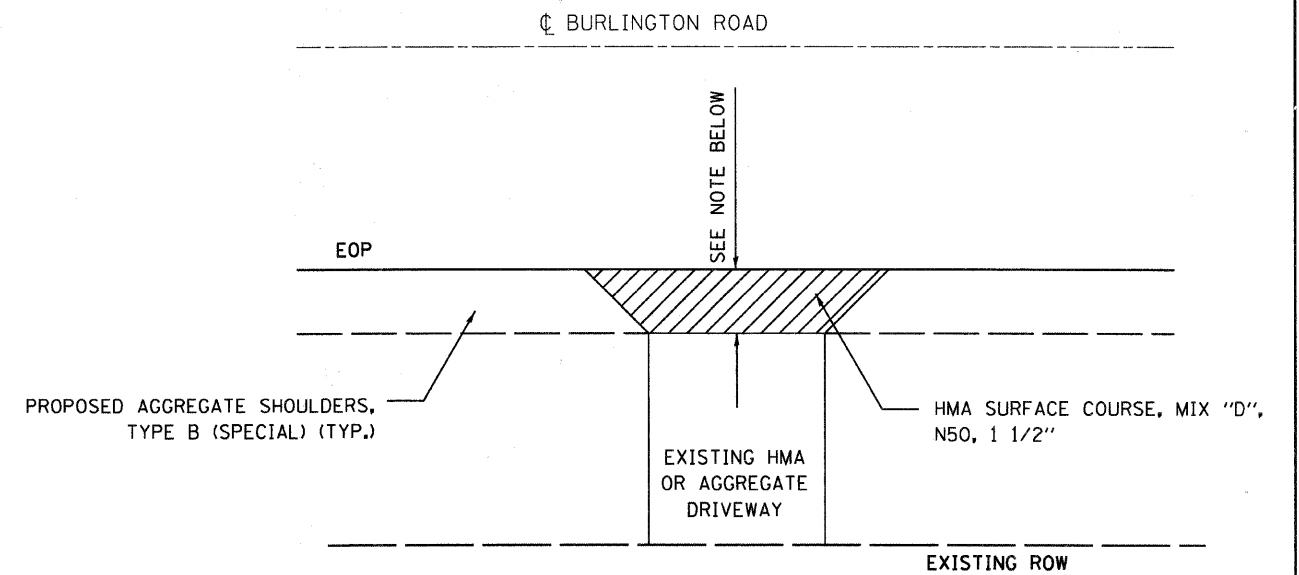

DRIVEWAY DETAIL

NOTE: 3' MAX. WHEN MATCHING EXISTING DRIVEWAY OR WHATEVER DIMENSION IS NECESSARY TO CREATE AND MAINTAIN A SATISFACTORY RIDING CONDITION. VARIABLE DIMENSIONS ARE SUBJECT TO ENGINEER APPROVAL.

FILE NAME =	USER NAME = #USER#	DESIGNED -	REVISED - 3-8-2010	McHENRY COUNTY DIVISION OF TRANSPORTATION BURLINGTON ROAD IMPROVEMENT	SUMMARY OF QUANTITIES AND DRIVEWAY DETAIL			F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
#FILEL#		DRAWN -	REVISED - 5-6-2011					4061	09-00371-00-RS	McHENRY	12	3
	PLOT SCALE = #SCALE#	CHECKED -	REVISED - 5/24/2011 (PER IDOT)		SCALE:	SHEET NO.	OF SHEETS	STA.	TO STA.	CONTRACT NO. 63386		
	PLOT DATE = #DATE#	DATE - 12-4-2009	REVISED -		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							