




R-3305 CATCH BASIN FRAME AND LID FOR BEHIND-THE-CURB CONSTRUCTION HEAVY DUTY TOTAL WEIGHT 425 LBS.

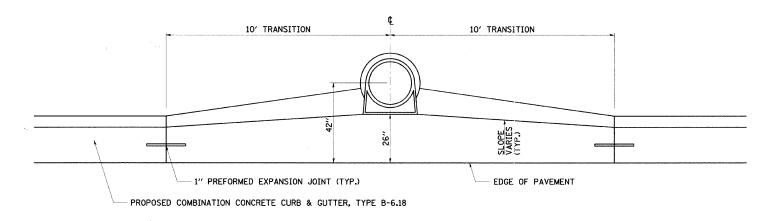


SAG FRAME & LID
SAG FRAME AND LID SHALL BE NEENAH FOUNDRY COMPANY *R-3305 OR APPROVED EQUAL.



MAILBOX LAYOUT DETAIL





NOTES

- 1. SAW CUT TO DIMENSIONS SHOWN.
- 2. SAW CUT AREAS ARE TO BE DRY AND FREE OF MATERIAL THAT ADVERSELY AFFECTS THE ADHESIVE BOND.
- INSTALL THE REFLECTOR WITH AN APPROVED TWO—COMPONENT EPOXY ADHESIVE. EPOXY SHOULD NOT OBSUCURE OR BLOCK THE LENS.
- 4. REFLECTOR SHALL BE 3M SERIES 190 OR ENGINEER APPROVED EQUIVALENT.
- 5. THE REFLECTOR HOLDER SHALL BE A MARKERONE SERIES R100 REFLECTOR HOLDER OR ENGINEER APPROVED EQUIVALENT.
- 6. FOR 1-WAY MARKERS HEADING UPHILL, UPHILL GRIND TAPER MAY BE OMITTED.

RECESSED REFLECTIVE PAVEMENT MARKER DETAIL

FILE NAME =	USER NAME = bdecraene	DESIGNED -	REVISED -				F.A.U. RTE.	SECTION	COUNTY TOTAL SHEET
V:\2791\2791hØØ7.dgn		DRAWN -	REVISED -	STATE OF ILLINOIS		C.H. 35 (55TH ST.) CONSTRUCTION DETAILS	1504	94-00302-00-FP	DU PAGE 240 142
	PLOT SCALE = 10.00000 '/ IN.	CHECKED ~	REVISED -	DEPARTMENT OF TRANSPORTATION					CONTRACT NO. 63609
	PLOT DATE = 5/25/2011	DATE -	REVISED -		SCALE: N/A	SHEET NO. 3 OF 4 SHEETS STA. N/A TO STA. N/A	***************************************	ILLINOIS FED. AID PROJECT	