

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pavement	214+87.98	-20.00	549.68
A	214+97.99	-20.00	549.59
B	215+07.99	-20.00	549.50
Bk. W. Abut.	215+17.96	-20.00	549.41
Bk. E. Abut.	216+28.66	-20.00	548.42
C	216+38.46	-20.00	548.34
D	216+48.25	-20.00	548.25
End E. Appr. Pavement	216+58.03	-20.00	548.16

SOUTH EDGE OF PAVEMENT, @ F.A.I. 80 RAMP B & P.G.



Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pavement	214+81.66	0.00	548.81
A	214+91.78	0.00	548.72
B	215+01.89	0.00	548.63
Bk. W. Abut.	215+12.00	0.00	548.54
Bk. E. Abut.	216+24.02	0.00	547.55
C	216+33.93	0.00	547.46
D	216+43.83	0.00	547.37
End E. Appr. Pavement	216+53.73	0.00	547.28

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pavement	214+86.73	-16.00	549.50
A	214+96.76	-16.00	549.41
B	215+06.78	-16.00	549.33
Bk. W. Abut.	215+16.78	-16.00	549.24
Bk. E. Abut.	216+27.74	-16.00	548.25
C	216+37.57	-16.00	548.16
D	216+47.38	-16.00	548.07
End E. Appr. Pavement	216+57.18	-16.00	547.99

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End W. Appr. Pavement	214+79.72	6.00	548.55
A	214+89.90	6.00	548.46
B	215+00.05	6.00	548.37
Bk. W. Abut.	215+10.18	6.00	548.28
Bk. E. Abut.	216+22.60	6.00	547.28
C	216+32.55	6.00	547.19
D	216+42.49	6.00	547.11
End E. Appr. Pavement	216+52.42	6.00	547.02

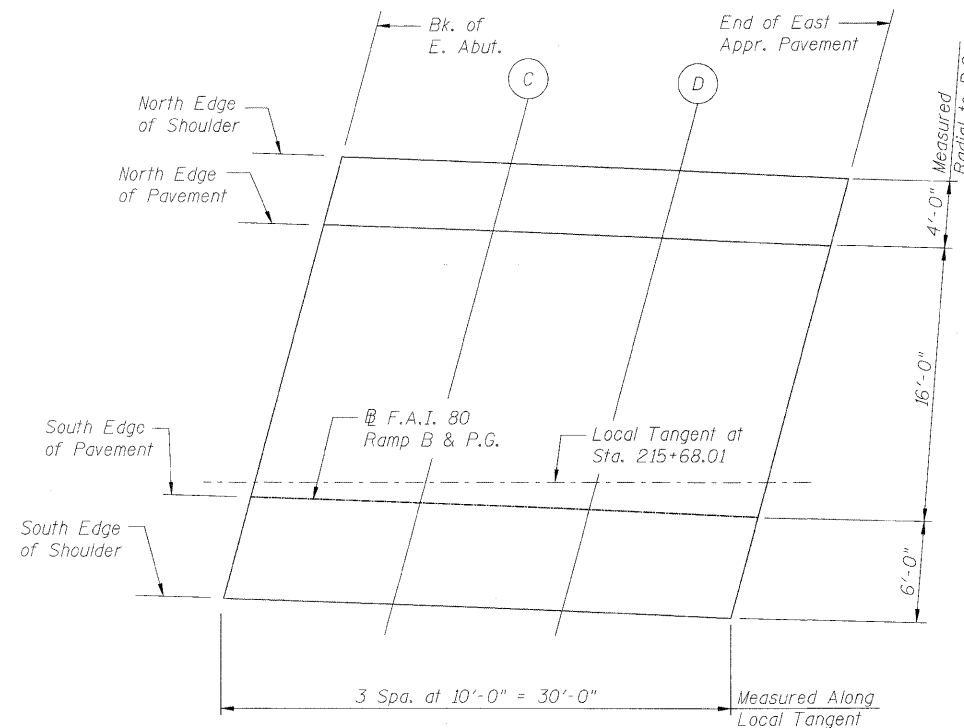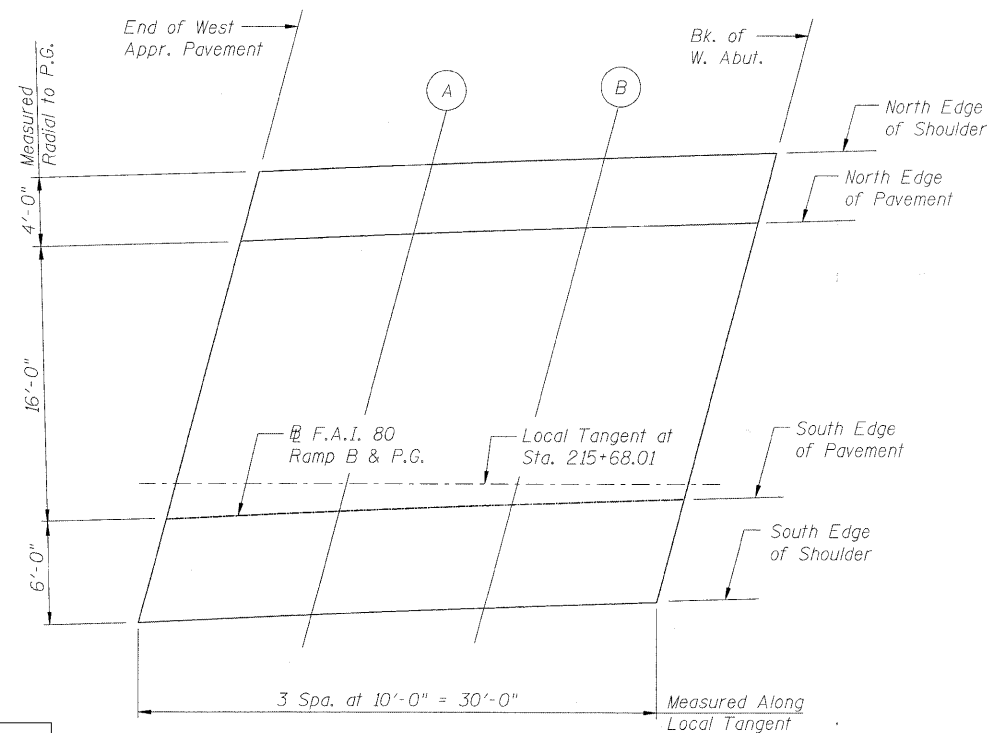

PLAN

DESIGNED - LJB
CHECKED - CMM
DRAWN - GJS
CHECKED - CMM

LOCHNER

H.W. LOCHNER, INC.
CONSULTING ENGINEERS & PLANNERS
20 NORTH WACKER DRIVE SUITE 1200
CHICAGO, IL 60606

SHEET NO.
5 OF 19
SHEETS

RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	(32,47-4) HBK-4 & G(N)	GRUNDY	351	318
CONTRACT NO. 66408				
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

* FAI 80 & FAS 297 / FAU 392

TOP OF APPROACH
SLAB ELEVATIONS
STRUCTURE NO. 032-0117