

TEMPORARY TRAFFIC SIGNAL INSTALLATION GENERAL NOTES

The Contractor shall provide, install and maintain the equipment with respect to the Temporary Traffic Signal Installation. This shall include all cables, signal heads, conduit, wood poles, guy wire assemblies, and all other equipment required for the installation.

The Traffic Signal Cabinet and controller shall be according to NEMA Standards for Traffic Control Systems.

Temporary cabinet to be furnished by the Contractor and equipped with video detection interface cables.

Poles shall be guyed or anchored to the satisfaction of the Engineer. Any adjustments shall be considered part of the pay item for Temporary Traffic Signal Installation.

All traffic signal sections shall be 12" heads.

When there are 2 signal heads for one indication, the heads shall be placed a minimum of 8 feet apart.


Heads shall be placed as indicated on the Temporary Traffic Signal plan or as directed by the Engineer.

The Contractor shall furnish enough cable slack to relocate heads to any position on the span wire or at locations illustrated on the plans for construction staging. The Temporary Traffic Signals shall remain in operation during all signal head relocations. Each Temporary Traffic Signal head shall have its own cable from the controller cabinet to the signal head.

The Contractor shall provide all labor, equipment and materials required to relocate the Temporary Traffic Signal Heads in accordance with the proposed staging.

The Contractor shall be responsible for modifying the video detection system to accommodate construction staging (including camera aiming and programming).

All labor, materials and equipment required to comply with these requirements shall be included in the price for TEMPORARY TRAFFIC SIGNAL INSTALLATION.

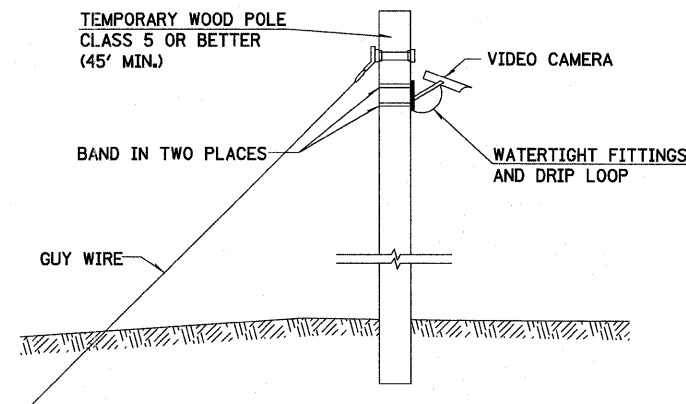

TEMPORARY VIDEO DETECTION MOUNTING DETAIL

BILL OF MATERIALS - FAYETTE AVENUE & NB RAMPS-I57/70 (RAMPS B & C)
TEMPORARY TRAFFIC SIGNAL INSTALLATION

ITEM	UNIT	QUANTITY
TEMPORARY TRAFFIC SIGNAL INSTALLATION	EACH	3.0

BILL OF MATERIALS - FAYETTE AVENUE & ILLINI DRIVE
TEMPORARY TRAFFIC SIGNAL INSTALLATION

ITEM	UNIT	QUANTITY
TEMPORARY TRAFFIC SIGNAL INSTALLATION	EACH	1.0