# SIGNING SCHEDULE

| STA (APPROX.) | NB / SB | SIGN PANEL NUMBER | HEIGHT | WIDTH | 50800105 REINFORCEMENT BARS | 72000100 SIGN PANEL - TYPE 1 | 72000200 SIGN PANEL - TYPE 2 | 72000300 SIGN PANEL - TYPE 3 | 72700100 STRUCTURAL STEEL SIGN SUPPORT - BREAKAWAY | 73400100 CONCRETE FOUNDATIONS |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | (IN) | (IN) | (POUND) | (SQ FT) | (SQ FT) | (SQ FT) | (POUND) | (CU YD) |
| **FAI 55** | | | | | | | | | | |
| 1220+00 | NB | SP1 | 108 | 234 | | | | 175.50 | | |
| 1181+00 | NB | SP2 | 174 | 192 | | | | 232.00 | | |
| 1153+00 | NB | SP3 | 210 | 192 | | | | 280.00 | | |
| 1133+60 | NB | SP4 | 186 | 192 | | | | 248.00 | | |
| 1126+50 | NB | SP5 | 36 | 36 | | 9.00 | | | | |
| 805+60 | NB | SP6 | 174 | 168 | | | | 203.00 | | |
| 791+00 | NB | SP6a | 60 | 90 | | | | 37.50 | | |
| 773+00 | NB | SP7 | 174 | 168 | | | | 203.00 | | |
| 753+25 | NB | SP8 | 216 | 168 | | | | 252.00 | | |
| 746+50 | NB | SP9 | 36 | 42 | | | 10.50 | | | |
| 682+00 | SB | SP10 | 174 | 168 | | | | 203.00 | | |
| 696+00 | SB | SP10a | 60 | 90 | | | | 37.50 | | |
| 704+00 | SB | SP11 | 174 | 168 | | | | 203.00 | | |
| 723+80 | SB | SP12 | 216 | 168 | | | | 252.00 | | |
| 730+60 | SB | SP13 | 36 | 42 | | | 10.50 | | | |
| 790+00 | SB | SP14 | 108 | 264 | | | | 198.00 | | |
| 1054+00 | SB | SP15 | 174 | 192 | | | | 232.00 | | |
| 1082+00 | SB | SP16 | 210 | 192 | | | | 280.00 | | |
| 1102+25 | SB | SP17 | 186 | 192 | 250 | | | 248.00 | 2,310 | 4.2 |
| 1109+15 | SB | SP18 | 36 | 36 | | 9.00 | | 9.00 | | |
| 1146+60 | SB | SP18a | 60 | 234 | | | | 97.50 | | |
| 1163+50 | SB | SP19 | 174 | 198 | | | | 239.25 | | |
| 1216+30 | SB | SP20 | 144 | 138 | | | | 138.00 | | |
| 1216+30 | SB | SP21 | 174 | 198 | | | | 239.25 | | |
| 1244+75 | SB | SP22 | 138 | 192 | | | | 184.00 | | |
| | | | | | | | | | | |
| **TOTALS** | | | | | **250** | **18.00** | **21.00** | **4191.50** | **2310** | **4.2** |
| **USE** | | | | | **250** | **18** | **21** | **4,192** | **2,310** | **4.2** |

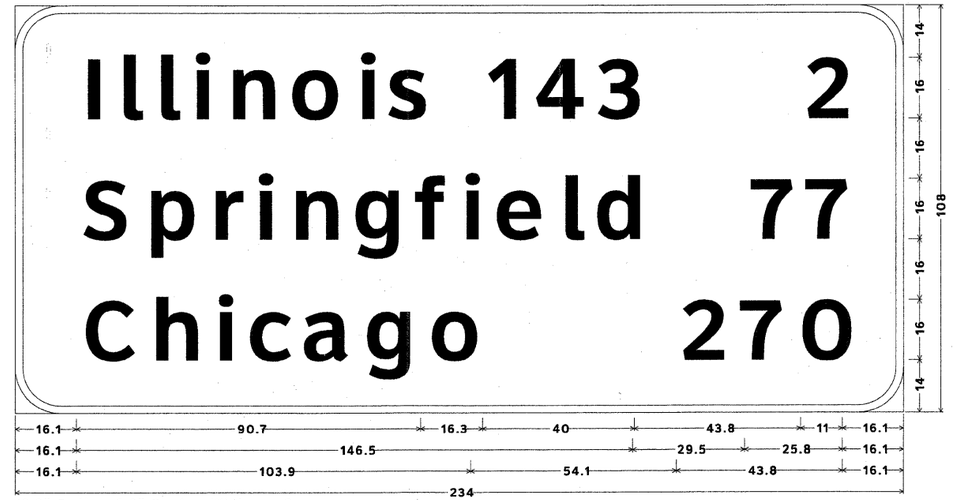


12.0" Radius, 2.0" Border, White on Green;
[Illinois 143] ClearviewHwy-5-W; [2] ClearviewHwy-5-W; [Springfield] ClearviewHwy-5-W; [77] ClearviewHwy-5-W; [Chicago] ClearviewHwy-5-W; [270] ClearviewHwy-5-W;
Table of widths and spaces.

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | I | | L | | l | | i | | n | | o | | i | | s | | 1 | | 4 | | 3 | | 2 | | | | | | | | | | | | |
| 16.1 | 3.1 | 6.3 | 5.1 | 4.8 | 5.0 | 4.4 | 3.8 | 5.7 | 11.2 | 5.4 | 12.4 | 5.0 | 3.8 | 4.5 | 10.2 | 16.3 | 7.4 | 5.0 | 12.7 | 3.8 | 11.1 | 43.8 | 11.0 | 16.1 | | | | | | | | | | | |
| | S | | p | | r | | i | | n | | g | | f | | i | | e | | l | | d | | 7 | | 7 | | | | | | | | | | |
| 16.1 | 11.6 | 5.0 | 11.6 | 5.4 | 7.4 | 4.3 | 3.8 | 5.7 | 11.1 | 5.4 | 11.7 | 4.7 | 7.8 | 4.2 | 3.8 | 5.1 | 11.7 | 5.4 | 5.1 | 4.2 | 11.5 | 29.5 | 11.3 | 3.2 | 11.3 | 16.1 | | | | | | | | | |
| | C | | h | | i | | c | | a | | g | | o | | 2 | | 7 | | 0 | | | | | | | | | | | | | | | | |
| 16.1 | 13.0 | 4.9 | 11.1 | 5.7 | 3.8 | 5.1 | 10.8 | 3.6 | 12.0 | 4.4 | 11.7 | 5.4 | 12.4 | 54.1 | 11.1 | 4.1 | 11.3 | 4.3 | 13.0 | 16.1 | | | | | | | | | | | | | | | |

## SIGN PANEL SP1

## BILL OF MATERIAL

| | | |
|---|---|---|
| SIGN PANEL - TYPE 1 | SQ FT | 18 |
| SIGN PANEL - TYPE 2 | SQ FT | 21 |
| SIGN PANEL - TYPE 3 | SQ FT | 4,187 |

## NOTE:

ALL GUIDE SIGNS SHALL HAVE ZZ SHEETING.

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FILE NAME = G:\S09017-7\155\CAD\Sign Panels.dgn | USER NAME = IE Consultants | DESIGNED - | REVISED - | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | FAI ROUTE 55 (I-55) SIGN PANEL DETAILS | F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| | | DRAWN - | REVISED - | | | 55 | 60-(1,2)RS-2 | MADISON | 156 | 132 |
| | PLOT SCALE = 0.5000 ' / IN. | CHECKED - | REVISED - | | | | | CONTRACT NO. 76C93 | | |
| | PLOT DATE = 6/28/2012 | DATE - | REVISED - | | SCALE: SHEET NO. OF SHEETS STA. TO STA. | FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |