


EMBANKMENT IN WATER DETAIL

NOTE:
CA6 AND STONE RIPRAP TO BE BENCHED INTO THE EXISTING GROUND ABOVE THE WATER LEVEL

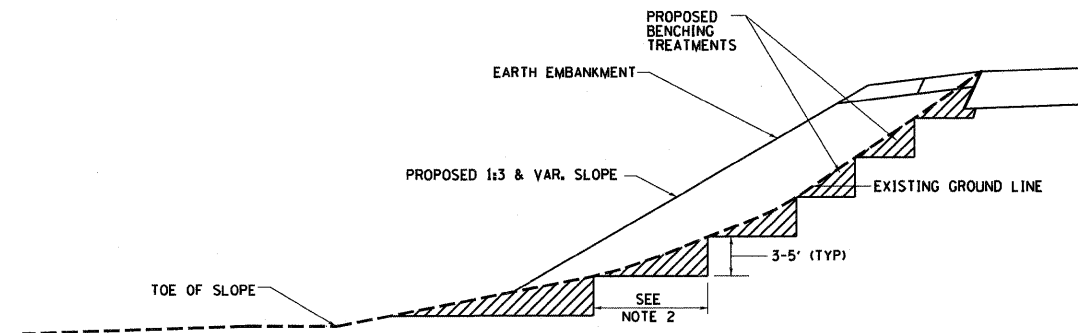

TYPICAL BENCHING DETAIL

GENERAL NOTES:

1. SLOPE STEPS WILL BE REQUIRED FOR ALL 12" THICKNESS "SLIVER FILLS" AND ON ALL FILLS WITH A HEIGHT OF 10' OR GREATER.
2. THE STEP WIDTH SHALL BE TWICE THE STEP DEPTH BUT NOT LESS THEN 6'.
3. REFER TO ARTICLE 205.03 FOR EMBANKMENT TO BE CONSTRUCTED ON HILLSIDE OR SLOPES, OR IF EXISTING EMBANKMENTS ARE TO BE WIDENED.
4. THIS WORK WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED AS INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION, AND THEIR CONSTRUCTION SHALL BE INCLUDED IN THE UNIT PRICES FOR THESE ITEMS.

FILE NAME =	USER NAME= paul	DESIGNED - JLS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS, FAP 332 (ILLINOIS ROUTE 1)	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
Projects\07-0008 080 Dist 7 Various\11 L 1 over NS\11 L 1 over NS\typical_section.dgn		DRAWN - MAB	REVISED -			332	103B-1	WABASH	90	9	
	PLOT SCALE 20.0000 ' / IN.	CHECKED - BRN	REVISED -			CONTRACT NO. 94754					
	PLOT DATE= 4/28/2009	DATE - 6-23-08	REVISED -			SCALE:	SHEET NO. 5 OF 6 SHEETS	STA.	TO STA.	FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT