

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	16.42	392.94
A	294+65.00	16.42	392.99
B	294+75.00	16.42	393.04
Bk. E. Abut.	294+85.00	16.42	393.09

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	12.00	393.03
A	294+65.00	12.00	393.08
B	294+75.00	12.00	393.13
Bk. E. Abut.	294+85.00	12.00	393.18

STAGE CONST. JOINT

Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	1.50	393.20
A	294+65.00	1.50	393.25
B	294+75.00	1.50	393.30
Bk. E. Abut.	294+85.00	1.50	393.35

☉ ROADWAY & PG


Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	0.000	393.22
A	294+65.00	0.000	393.27
B	294+75.00	0.000	393.32
Bk. E. Abut.	294+85.00	0.000	393.37

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	-12.00	393.03
A	294+65.00	-12.00	393.08
B	294+75.00	-12.00	393.13
Bk. E. Abut.	294+85.00	-12.00	393.18

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End E. Appr. Pav't	294+55.00	-16.42	392.94
A	294+65.00	-16.42	392.99
B	294+75.00	-16.42	393.04
Bk. E. Abut.	294+85.00	-16.42	393.09

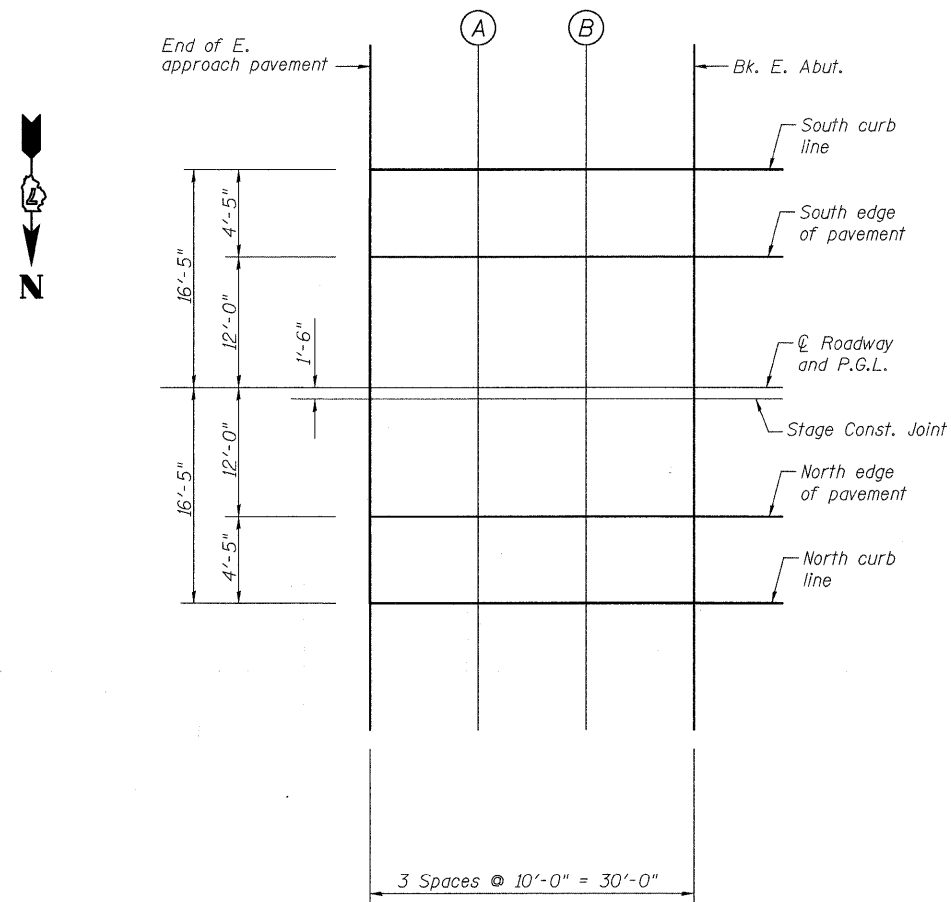

**TOP OF EAST APPROACH
SLAB ELEVATIONS**
**IL 15 OVER UNION DRAINAGE
DITCH OVERFLOW**
WAYNE COUNTY
STATION 295+41.00
STRUCTURE NO. 096-0072

SHEET NO. 6	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	823	(22BY2) B-1	WAYNE	142	43
23 SHEETS	CONTRACT NO. 74238				
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT			