

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	16.42	393.65
C	296+07.00	16.42	393.70
D	296+17.00	16.42	393.75
End W. Appr. Pav't	296+27.00	16.42	393.80

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	12.00	393.74
C	296+07.00	12.00	393.79
D	296+17.00	12.00	393.84
End W. Appr. Pav't	296+27.00	12.00	393.89

STAGE CONST. JOINT

Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	1.50	393.91
C	296+07.00	1.50	393.96
D	296+17.00	1.50	394.01
End W. Appr. Pav't	296+27.00	1.50	394.06

☉ ROADWAY & PG


Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	0.000	393.93
C	296+07.00	0.000	393.98
D	296+17.00	0.000	394.03
End W. Appr. Pav't	296+27.00	0.000	394.08

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	-12.00	393.74
C	296+07.00	-12.00	393.79
D	296+17.00	-12.00	393.84
End W. Appr. Pav't	296+27.00	-12.00	393.89

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Bk. W. Abut.	295+97.00	-16.42	393.65
C	296+07.00	-16.42	393.70
D	296+17.00	-16.42	393.75
End W. Appr. Pav't	296+27.00	-16.42	393.80

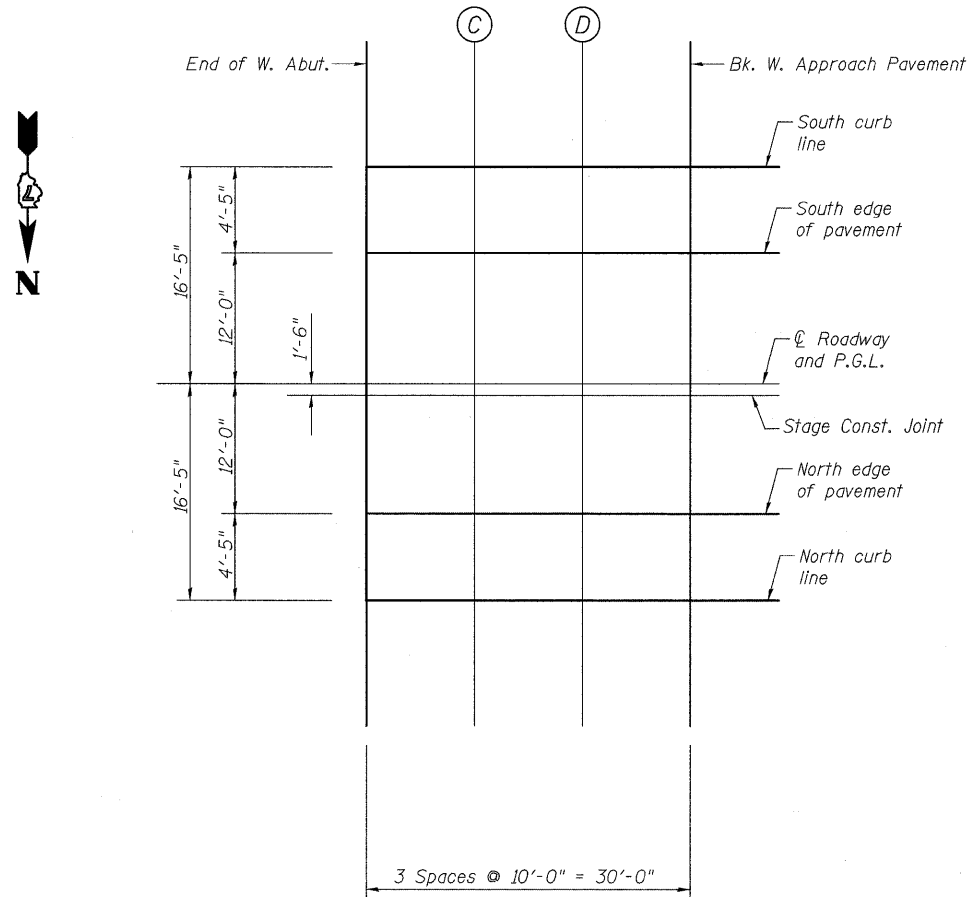

**TOP OF WEST APPROACH
SLAB ELEVATIONS**

**IL 15 OVER UNION DRAINAGE
DITCH OVERFLOW
WAYNE COUNTY
STATION 295+41.00
STRUCTURE NO. 096-0072**

SHEET NO. 7 23 SHEETS	F.A.P. RTE. 823	SECTION (22BY2) B-1	COUNTY WAYNE	TOTAL SHEETS 142	SHEET NO. 44
	CONTRACT NO. 74238				
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT		