

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CONTRACT NO. 83827

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	DUPAGE		106	26
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

SHEET NO. S5
of 534 SHEETS


* 00-00116-00-BR

BEAM #8


Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection
BK. W. ABUT.	6+88.548	17.517	680.265	680.265
☉ BRG. W. ABUT.	6+90.580	17.574	680.316	680.316
A	7+00.643	17.830	680.565	680.580
B	7+10.708	18.049	680.815	680.829
C	7+20.775	18.230	680.069	681.099
☉ PIER 1	7+34.779	18.420	681.439	681.439
D	7+44.848	18.512	681.716	681.740
E	7+54.917	18.566	682.002	682.057
F	7+64.987	18.583	682.299	682.368
G	7+75.057	18.562	682.604	682.666
H	7+85.126	18.504	682.920	682.954
☉ PIER 2	7+98.054	18.374	683.339	683.339
I	8+08.122	18.230	683.676	683.679
J	8+18.188	18.049	684.023	684.037
K	8+28.253	17.830	684.380	684.396
☉ BRG. E. ABUT.	8+42.250	17.463	684.891	684.891
BK. E. ABUT.	8+44.282	17.404	684.967	684.967

BEAM #9

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Dead Load Deflection
BK. W. ABUT.	6+89.013	23.533	680.152	680.152
☉ BRG. W. ABUT.	6+91.050	23.589	680.202	680.202
A	7+01.136	23.843	680.452	680.467
B	7+11.223	24.060	680.703	680.716
C	7+21.313	24.240	680.958	680.987
☉ PIER 1	7+35.348	24.427	681.329	681.329
D	7+45.440	24.516	681.607	681.632
E	7+55.532	24.568	681.895	681.950
F	7+65.625	24.583	682.193	682.262
G	7+75.717	24.560	682.500	682.561
H	7+85.809	24.499	682.817	682.850
☉ PIER 2	7+98.766	24.366	683.238	683.238
I	8+08.856	24.219	683.576	683.579
J	8+18.945	24.035	683.925	683.939
K	8+29.033	23.813	684.283	684.299
☉ BRG. E. ABUT.	8+43.061	23.442	684.797	684.797
BK. E. ABUT.	8+45.098	23.382	684.873	684.873

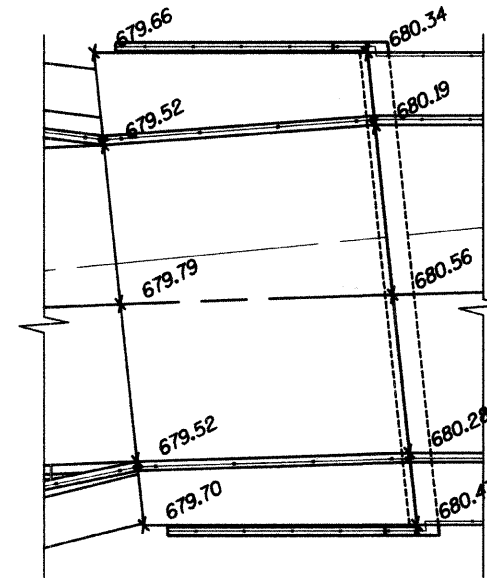

WEST APPROACH PAVEMENT PLAN

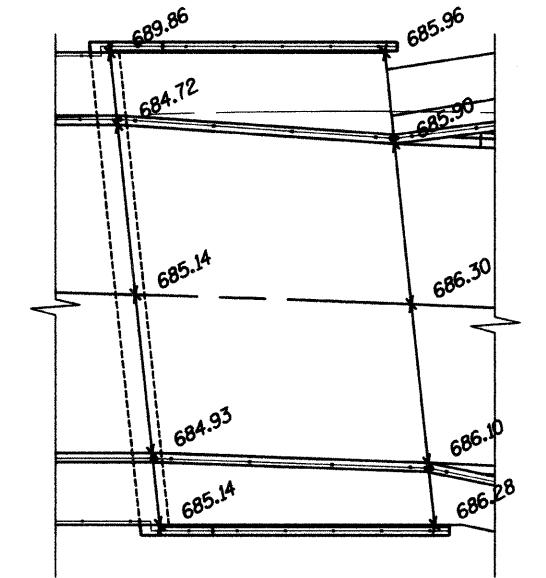

EAST APPROACH PAVEMENT PLAN

Note: Spot grades given are for the top of approach pavement, add 6 1/2" to calculate top of sidewalk elevations.

DESIGNED	SRT
CHECKED	JJI
DRAWN	GM
CHECKED	JJI

Bellinger, Lach & Associates, Inc.

TOP OF SLAB ELEVATIONS
JEFFERSON AVENUE OVER WEST BRANCH DUPAGE RIVER FAU 3570 SECTION 00-00116-00-BR DUPAGE COUNTY STA. 7+64.45 STRUCTURE NUMBER 022-6756