

FAU 6801
 ENGINEERING DIVISION
 CITY OF GALESBURG, ILLINOIS
PLANS FOR PROPOSED
SOUTH SEMINARY STREET RESURFACING

FEDERAL PROJECT NUMBER ARA-5025(046)
 SECTION NUMBER: 09-00501-25-RS
 JOB C-94-077-09
 CONTRACT 89519

PROJECT LIMITS: SOUTH SEMINARY STREET FROM THE SOUTH CITY LIMITS TO FIFTH STREET
 TOWNSHIP 11 NORTH, RANGE 1 EAST, NE QUADRANT OF SECTION 22, NW QUADRANT OF SECTION 23

CONTRACT #	SECTION #	TOTAL SHEETS	SHEET NO.
89519	09-00501-25-RS	8	1

CALL J.U.L.I.E.
 BEFORE DIGGING
 800-892-0123


QC/QA BITUMINOUS
 SUPERPAVE PROJECT

INDEX OF SHEETS

SHEET 1	TITLE SHEET
SHEET 2	SCHEDULE OF QUANTITIES, HMA REQUIREMENTS, AND PAVEMENT DESIGN
SHEET 3	TYPICAL SECTIONS AND DETAILS
SHEET 4-6	PLAN SHEETS
SHEET 7-8	STRIPING

SUMMARY OF QUANTITIES

PAY CODE	PAY ITEM	UNITS	TOTAL QUANTITY
40600115	POLYMERIZED BITUMINOUS MATERIALS (PRIME COAT)	GAL	1,259.0
40600300	AGGREGATE (PRIME COAT)	TDN	34.0
40600990	TEMPORARY RAMP	SQ YD	193.0
40603230	POLYMERIZED HOT MIX ASPHALT BINDER COURSE, IL-19.0, N50	TDN	1,095.0
40603535	POLYMERIZED HOT MIX ASPHALT SURFACE COURSE, MIX 'D', N50	TDN	608.0
42400100	PORTLAND CEMENT SIDEWALK 4 INCH	SQ FT	960.0
42400300	PORTLAND CEMENT SIDEWALK 6 INCH	SQ FT	397.0
42400410	PORTLAND CEMENT SIDEWALK 8 INCH	SQ FT	77.0
42400800	DETECTABLE WARNINGS	SQ FT	24.0
44000161	HOT-MIX ASPHALT SURFACE REMOVAL, 3"	SQ YD	8,396.0
44000500	COMBINATION CURB AND GUTTER REMOVAL	SQ FT	45.0
44000600	SIDEWALK REMOVAL	SQ FT	1,411.0
44201325	CLASS C PATCHES, TYPE I, 8 INCH	SQ YD	3.0
44201329	CLASS C PATCHES, TYPE II, 8 INCH	SQ YD	6.0
60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	7.0
60603900	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12 (AEP)	FOOT	45.0
67100100	MOBILIZATION	L. SUM	1.0
70101700	TRAFFIC CONTROL AND PROTECTION	L. SUM	1.0
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	1,302.0
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	145.0
78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	640.0
78000500	THERMOPLASTIC PAVEMENT MARKING - LINE 8"	FOOT	178.0
XX002873	BRICK SIDEWALK REMOVAL	SQ FT	40.0
XX006793	BRICK SIDEWALK	SQ FT	40.0
40600995	TEMPORARY RAMP, SPECIAL	SQ YD	131.0

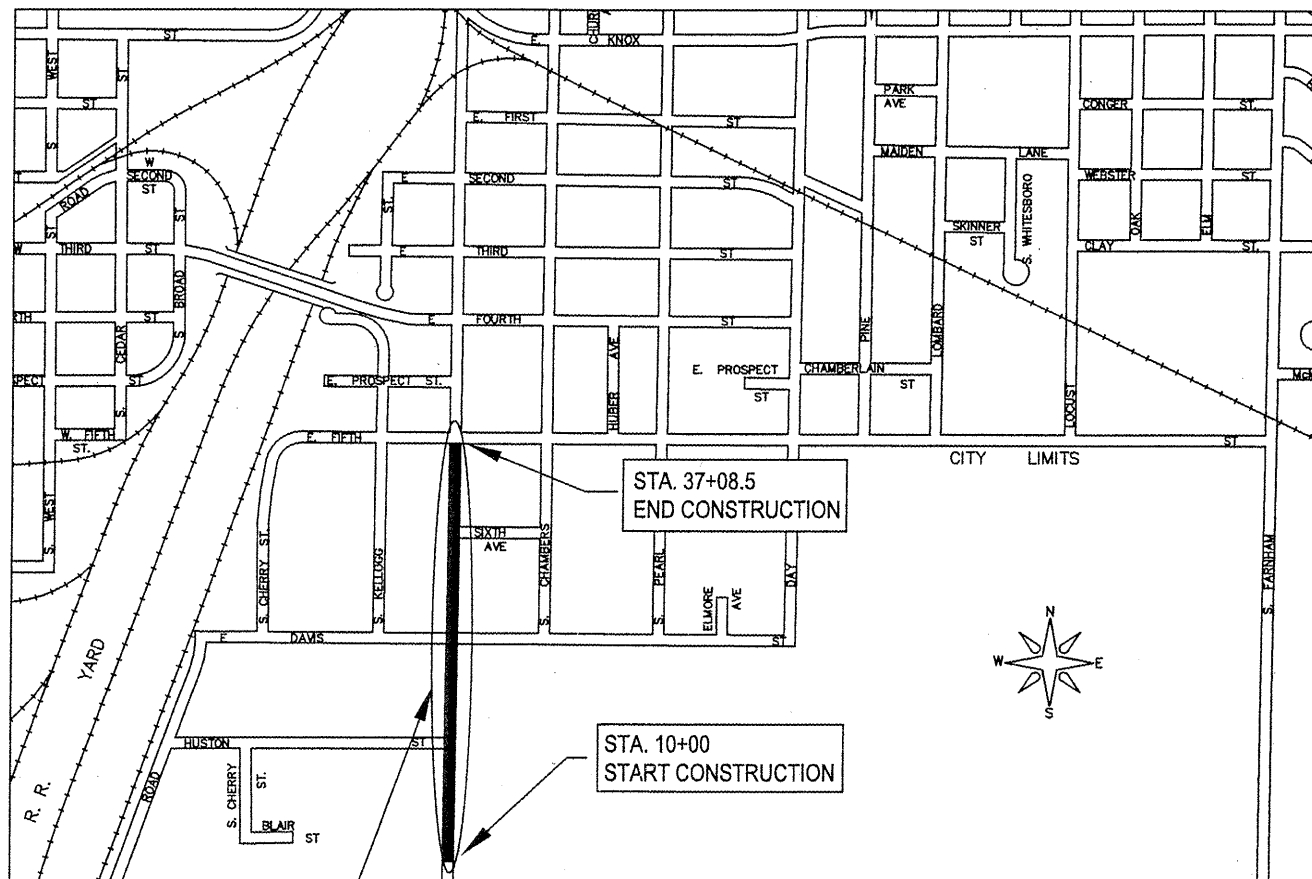


PROJECT LOCATION
 SOUTH SEMINARY STREET
 FROM SOUTH CITY LIMITS TO FIFTH STREET

GENERAL LOCATION MAP

NOT TO SCALE

LENGTH OF PROJECT = 2,709 FT = 0.513 MILES

THIS PROJECT INCLUDES REMOVAL OF 3.0" OF THE EXISTING HMA SURFACE FOR THE ENTIRE PROJECT LIMITS, AND OVERLAY WITH 2.25" OF PHMA BINDER COURSE IL-19.0 N50 AND 1.25" OF PHMA SURFACE COURSE MIX D N50. OTHER IMPROVEMENTS WILL INCLUDE CURB AND GUTTER REPAIRS, SIDEWALK REPAIRS, THERMOPLASTIC STRIPING, AND OTHER COLLATERAL WORK.



ENGINEERING DIVISION
 CITY OF GALESBURG ILLINOIS

APPROVED 7/11 2009
Wayne E. Carl
 LOCAL AGENCY REPRESENTATIVE

EXP. 11/30/2009

PASSED 7-8 2009

Doreen Chial
 DISTRICT 4 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID
 BASED ON LIMITED
 REVIEW 7/7 2009

Joseph E. Browner
 DEPUTY DIRECTOR OF HIGHWAYS, REGION 4 ENGINEER
 STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

TITLE SHEET

S. SEMINARY STREET
 SECTION # 09-00501-25-RS
 CONTRACT # 89519
 JOB # C-94-077-09



HIGHWAY STANDARDS

STD. NO.	DESCRIPTION
424001-05	CURB RAMPS FOR SIDEWALKS
442201-03	CLASS C AND D PATCHES
606001-04	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701301-03	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701311-03	LANE CLOSURE 2L, 2W MOVING OPERATIONS - DAY ONLY
701501-05	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701801-04	LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
701901-01	TRAFFIC CONTROL DEVICES
780001-02	TYPICAL PAVEMENT MARKINGS

CATALOG # 034234-00