


|                       |                |           |                    |           |
|-----------------------|----------------|-----------|--------------------|-----------|
| T.R.                  | SECTION        | COUNTY    | TOTAL SHEETS       | SHEET NO. |
| 68                    | 05-07106-00-BR | EFFINGHAM | 25                 | 1         |
| FED. ROAD DIST. NO. 7 |                | ILLINOIS  | CONTRACT NO. 95593 |           |

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**

**PLANS FOR PROPOSED  
HIGHWAY BRIDGE PROGRAM**

**TOWNSHIP ROAD 68  
SECTION 05-07106-00-BR  
FEDERAL PROJECT BROS-049(154)  
EFFINGHAM COUNTY  
MASON ROAD DISTRICT**

C-97-115-07

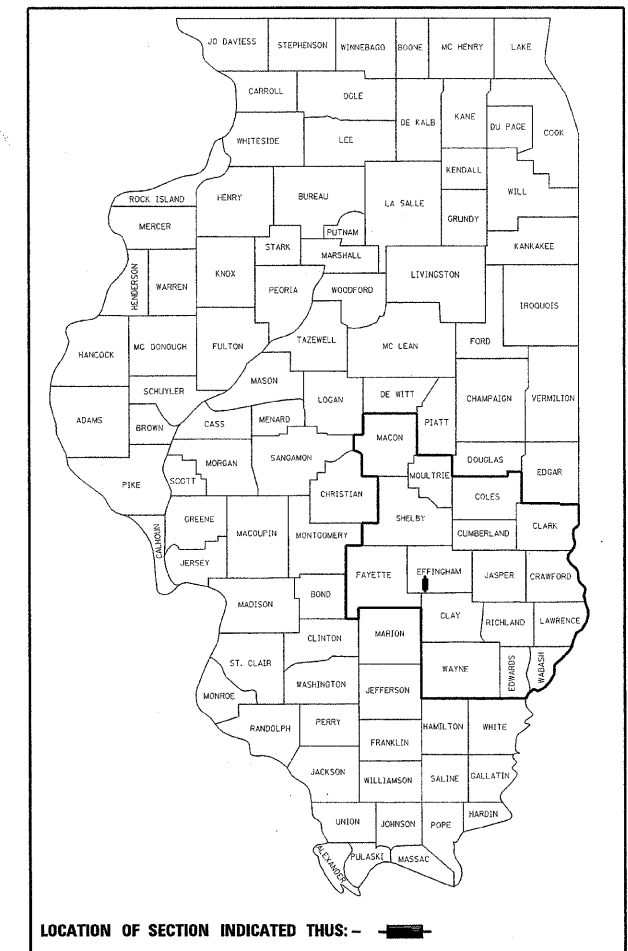


**INDEX OF SHEETS**

- 1 COVER SHEET
- 2 SUMMARY OF QUANTITIES, TYPICAL CROSS SECTIONS, GENERAL NOTES AND MISCELLANEOUS DETAILS
- 3 SCHEDULE OF QUANTITIES, TRANSIT LINE TIES AND CONTROL POINT TIES
- 4 PLAN AND PROFILE
- 5 EROSION CONTROL PLAN
- 6 RIGHT OF WAY PLAT
- 7-22 BRIDGE PLANS S.N. 025-3318
- 23-25 CROSS SECTIONS

**HIGHWAY STANDARD DETAILS**

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 001001-02 AREA OF REINFORCEMENT BARS
- 001006 DECIMAL OF AN INCH AND OF A FOOT
- 280001-04 TEMPORARY EROSION CONTROL SYSTEMS
- 515001-03 NAME PLATE FOR BRIDGE
- 601101-01 CONCRETE HEADWALL FOR PIPE DRAIN
- 602306-02 INLET - TYPE B
- 635001-01 DELINEATORS
- 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT
- 635011-02 REFLECTOR MARKER AND MOUNTING DETAILS
- 701901-01 TRAFFIC CONTROL DEVICES
- 720001-01 SIGN PANEL MOUNTING DETAILS
- 720011-01 METAL POSTS FOR SIGNS, MARKERS & DELINEATORS
- B.L.R. 21-8 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
- B.L.R. 22-6 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS

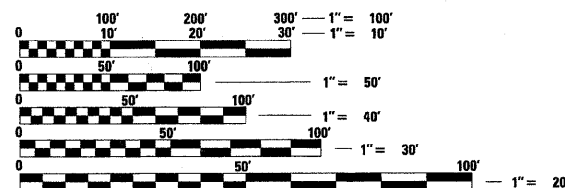

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.


**J.U.L.I.E.**  
**JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION**  
1-800-892-0123  
OR 811

**JOB NUMBER C-97-115-07**  
**CONTRACT NUMBER 95593**  
**CONSTRUCTION TYPE CODE: ROADWAY: E000**  
**BRIDGE: X081**

FUNCTIONAL CLASSIFICATION: RURAL LOCAL ROAD  
DESIGN SPEED: 30 MPH  
DESIGN TRAFFIC: 150 (2027)  
% TRUCKS: 5.0  
% PASSENGER VEHICLES: 95.0

**UTILITIES**

POWER - SOUTHWESTERN ELECTRIC  
TELEPHONE - FRONTIER COMMUNICATIONS  
WATER - EJ WATER CORPORATION

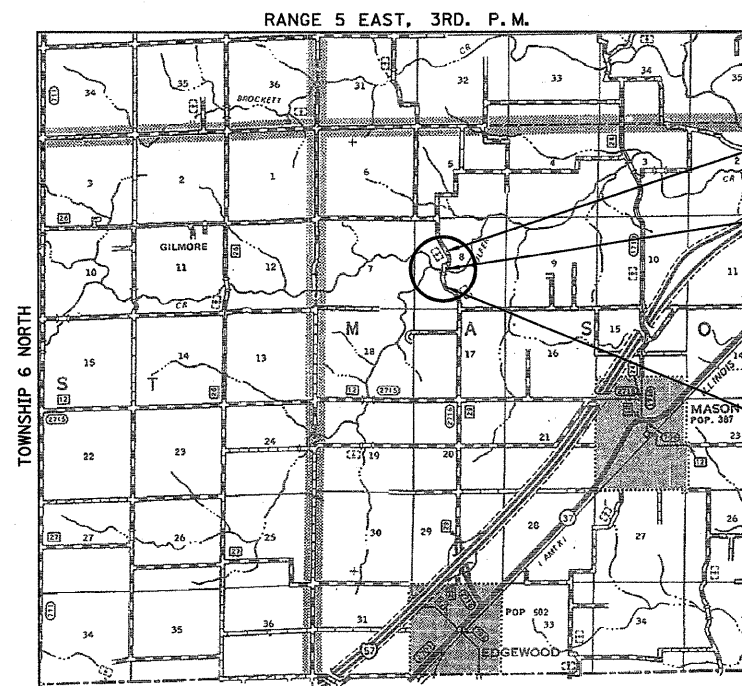

**LOCATION MAP**

GROSS LENGTH OF PROJECT = 600.00 FT = 0.114 MILE  
NET LENGTH OF PROJECT = 600.00 FT = 0.114 MILE

IMPROVEMENT ENDS  
STA. 13+00.00


PROPOSED STRUCTURE NO. 025-3318  
AT STATION 9+96.25 BRIDGE  
REPLACEMENT OVER FULFER CREEK

IMPROVEMENT BEGINS  
STA. 7+00.00

APPROVED *[Signature]* 7/23/09  
EFFINGHAM COUNTY HIGHWAY DEPARTMENT, COUNTY ENGINEER

PASSED *[Signature]* 7/2/09  
DISTRICT 7 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID  
BASED ON LIMITED  
REVIEW *[Signature]* 7/2/09  
DEPUTY DIRECTOR OF HIGHWAYS, REGION 4 ENGINEER



*Mark S. Wylie* Date 6/22/09  
**MARK S. WYLIE**  
ILLINOIS PROFESSIONAL ENGINEER  
NO. 062-043716  
EXPIRATION 11/30/09