
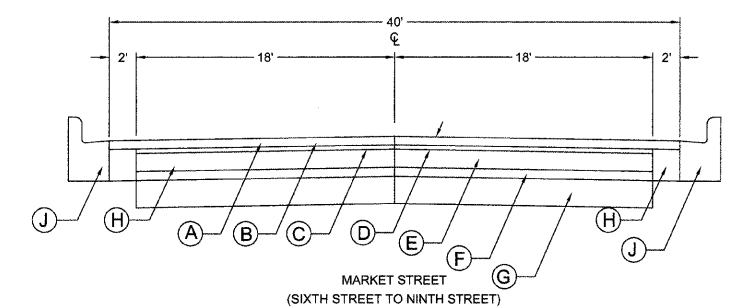
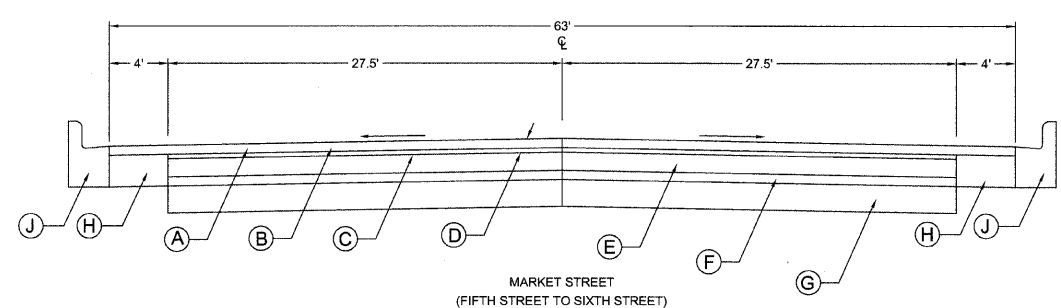
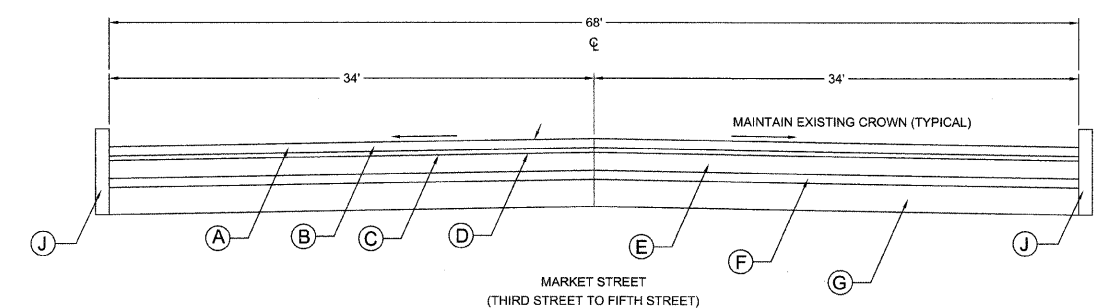
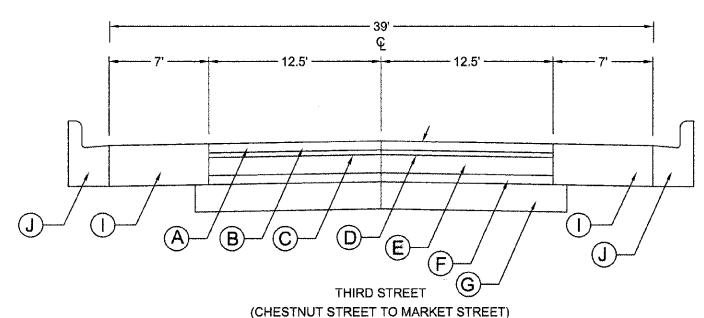


SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
08-00072-00-RS	WABASH	8	2
FAU ROUTES 8655 & 8659			
PROJECT M-ARA-5048(020) CONTRACT 95597			

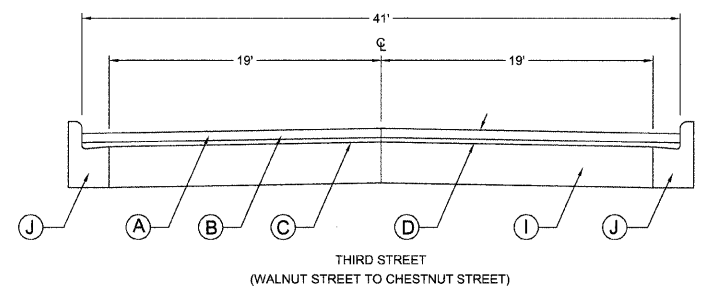

**LEGEND**


- (A) HOT-MIX ASPHALT SURFACE COURSE, TYPE "C", N70 (2")
- (B) HOT-MIX ASPHALT SURFACE REMOVAL (2" NOMINAL THICKNESS)
- (C) BITUMINOUS MATERIALS (PRIME COAT)
- (D) EXISTING ASPHALT PAVING (2" - 3" BEFORE MILLING)
- (E) EXISTING BRICK PAVEMENT (4")
- (F) EXISTING SAND CUSHION (2")
- (G) EXISTING CONCRETE BASE (6")
- (H) EXISTING PCC WIDENING
- (I) EXISTING PCC PAVEMENT (9")
- (J) EXISTING CONCRETE CURB OR CONCRETE CURB & GUTTER

**GENERAL NOTES**

THIS SECTION SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE PLANS, "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" ADOPTED JANUARY 1, 2007, THE LATEST EDITION OF THE "ILLINOIS MANUAL FOR TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS", THE CURRENT EDITION OF THE "SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS" AS WELL AS THE SPECIAL PROVISIONS INCLUDED IN THE PROPOSAL.

THE WORK INCLUDED IN THIS SECTION SHALL CONSIST OF ROTOMILLING AND RESURFACING THE EXISTING ASPHALT SURFACE, PLACEMENT OF THERMOPLASTIC PAVEMENT MARKINGS, PATCHING AS NECESSARY, AND ANY OTHER WORK NEEDED TO COMPLETE THE PROJECT.

**TEMPORARY RAMP DETAILS**



NOTE: TEMPORARY RAMPS TO BE CONSTRUCTED AT EACH END OF PROJECT, AT EACH INTERSECTING STREET, AND AT END OF PROGRESS FOR EACH DAY.

**SUMMARY OF QUANTITIES**

QUANTITY	UNIT	ITEM	CODE NO.
1110.0	GALLON	BITUMINOUS MATERIALS (PRIME COAT)	40600100
55.0	TON	AGGREGATE (PRIME COAT)	40600300
12.0	TON	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	40600400
2780.0	TON	HOT-MIX ASPHALT SURFACE COURSE, MIXTURE "C", N70	40603315
400.0	SQ YD	TEMPORARY RAMP	40600990
22240.0	SQ YD	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	44000157
8.0	SQ YD	CLASS D PATCHES, TYPE I	44201974
10.0	SQ YD	CLASS D PATCHES, TYPE II	44201976
1.0	L SUM	MOBILIZATION	67100100
1.0	L SUM	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	70101800
780.0	FOOT	SHORT-TERM PAVEMENT MARKING	70300100
1040.0	SQ FT	WORK ZONE PAVEMENT MARKING REMOVAL	70301000
30.4	SQ FT	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	78000100 *
5998.0	FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	78000200 *
260.0	FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	78000400 *
290.0	FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	78000600 *
54.0	FOOT	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	78000650 *
600.0	FOOT	DETECTOR LOOP, TYPE I	88600100 *

\* SPECIALTY ITEMS