
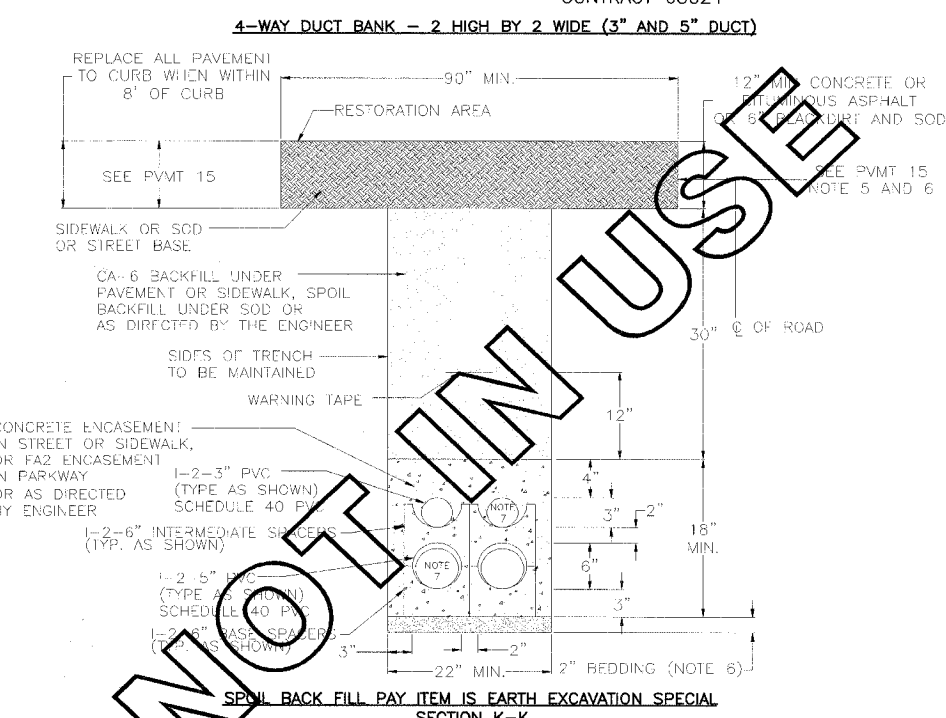
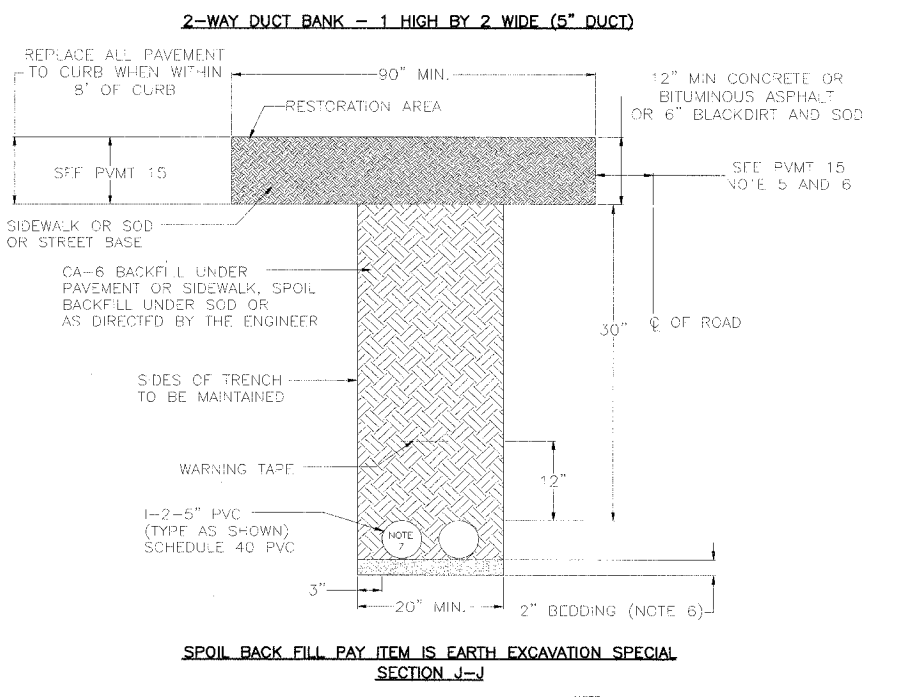


F.A. RTE.	2552	SECTION		COUNTY	DUPAGE	TOTAL SHEETS	563	SHEET NO.	261
STA.	TO STA.								
FED. ROAD DIST. NO.	ILLINOIS		FED. AID PROJECT						
CONTRACT 63024									

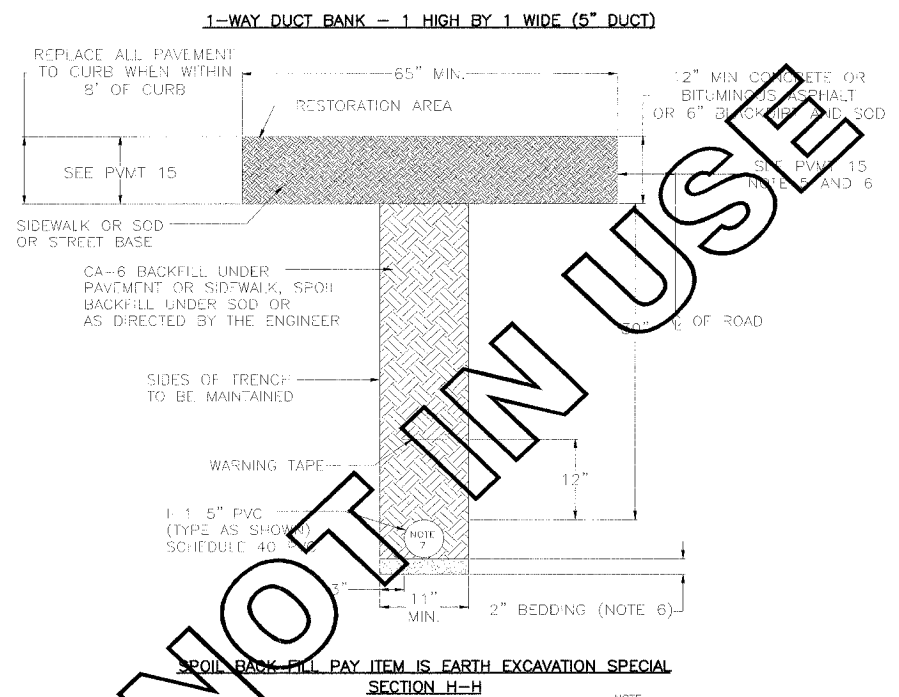

SPoil BACK FILL PAY ITEM IS EARTH EXCAVATION SPECIAL SECTION H-H

NOTE:

- 1) ALL CONDUIT RUNS ARE ASSEMBLED IN FIELD.
- 2) INSTALL 1/8" DIA. (PULLING) NYLON ROPE IN EACH DUCT.
- 3) ALL CABLES BY OTHERS.
- 4) CONDUIT AND SPACERS AND ALL OTHER MATERIALS INCLUDING GLUE, COUPLINGS AND MANHOLE ENTRANCES FURNISHED BY CITY OF NAPERVILLE AND INSTALLED BY CONTRACTOR.
- 5) INSTALL BEDDING FA-2 OR CA-6.
- 6) INSTALL MULE TAPE OR #12 COPPER WIRE THIN IN THIS DUCT ONLY.
- 7) CONTRACTOR TO INSTALL DUCT RUN PER C30-1900.

CITY OF NAPERVILLE
DEPARTMENT OF PUBLIC UTILITIES-ELECTRIC
TYPICAL CONDUIT SECTION H-H
75TH STREET

APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE SPOIL BACKFILL
APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE CA-6 BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) CA-6 BACKFILL

SPoil BACK FILL PAY ITEM IS EARTH EXCAVATION SPECIAL SECTION J-J

NOTE:

- 1) ALL CONDUIT RUNS ARE ASSEMBLED IN FIELD.
- 2) INSTALL 1/8" DIA. (PULLING) NYLON ROPE IN EACH DUCT.
- 3) ALL CABLES BY OTHERS.
- 4) CONDUIT AND SPACERS AND ALL OTHER MATERIALS INCLUDING GLUE, COUPLINGS AND MANHOLE ENTRANCES FURNISHED BY CITY OF NAPERVILLE AND INSTALLED BY CONTRACTOR.
- 5) INSTALL BEDDING FA-2 OR CA-6.
- 6) INSTALL MULE TAPE OR #12 COPPER WIRE THIN IN THIS DUCT ONLY.
- 7) CONTRACTOR TO INSTALL DUCT RUN PER C30-1900.

CITY OF NAPERVILLE
DEPARTMENT OF PUBLIC UTILITIES-ELECTRIC
TYPICAL CONDUIT SECTION J-J
75TH STREET

APPROXIMATE LENGTH = (NONE) CONCRETE ENCASE SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) CONCRETE ENCASE CA-6 BACKFILL
APPROXIMATE LENGTH = 20 FEET (FA2 ENCASED) SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) CA-6 BACKFILL



SPoil BACK FILL PAY ITEM IS EARTH EXCAVATION SPECIAL SECTION K-K

NOTE:

- 1) THE BASE AND INTERMEDIATE 6" SPACERS SHALL BE INSTALLED AT 5' CENTERS.
- 2) ALL CONDUIT RUNS ARE ASSEMBLED IN FIELD.
- 3) INSTALL 1/8" DIA. (PULLING) NYLON ROPE IN EACH DUCT.
- 4) ALL CABLES BY OTHERS.
- 5) CONDUIT AND SPACERS AND ALL OTHER MATERIALS INCLUDING GLUE, COUPLINGS AND MANHOLE ENTRANCES FURNISHED BY CITY OF NAPERVILLE AND INSTALLED BY CONTRACTOR.
- 6) INSTALL BEDDING FA-2 OR CA-6.
- 7) INSTALL MULE TAPE OR #12 COPPER WIRE THIN IN THIS DUCT ONLY.
- 8) CONTRACTOR TO SUPPLY PLASTIC TIES TO HOLD 3", 5", AND 6" CONDUIT TO 6" SPACERS.
- 9) CONTRACTOR TO INSTALL DUCT RUN PER C30-1900.

CITY OF NAPERVILLE
DEPARTMENT OF PUBLIC UTILITIES-ELECTRIC
TYPICAL CONDUIT SECTION K-K
75TH STREET

APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE SPOIL BACKFILL
APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE CA-6 BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) CA-6 BACKFILL

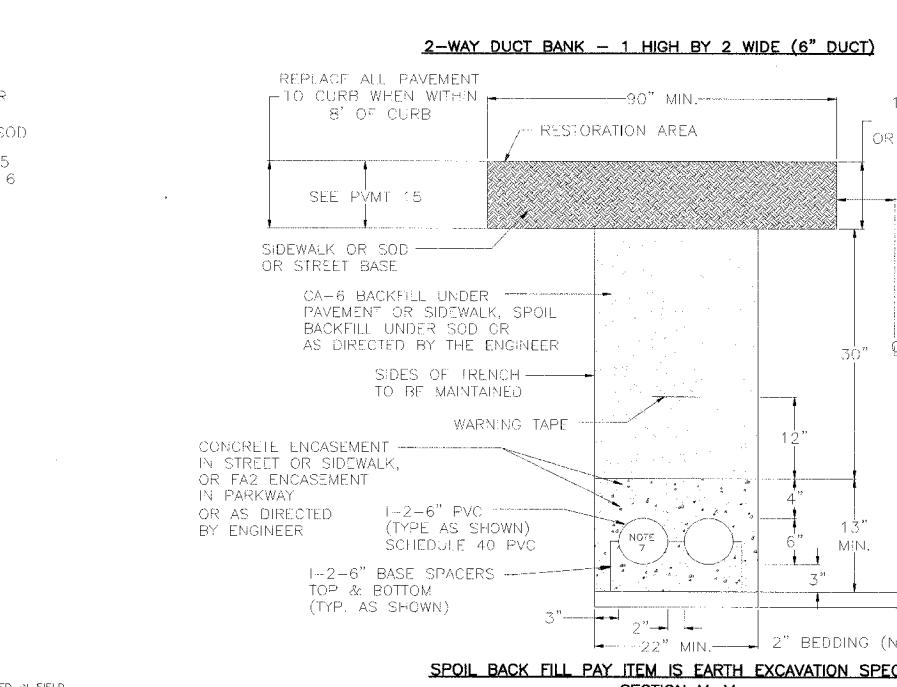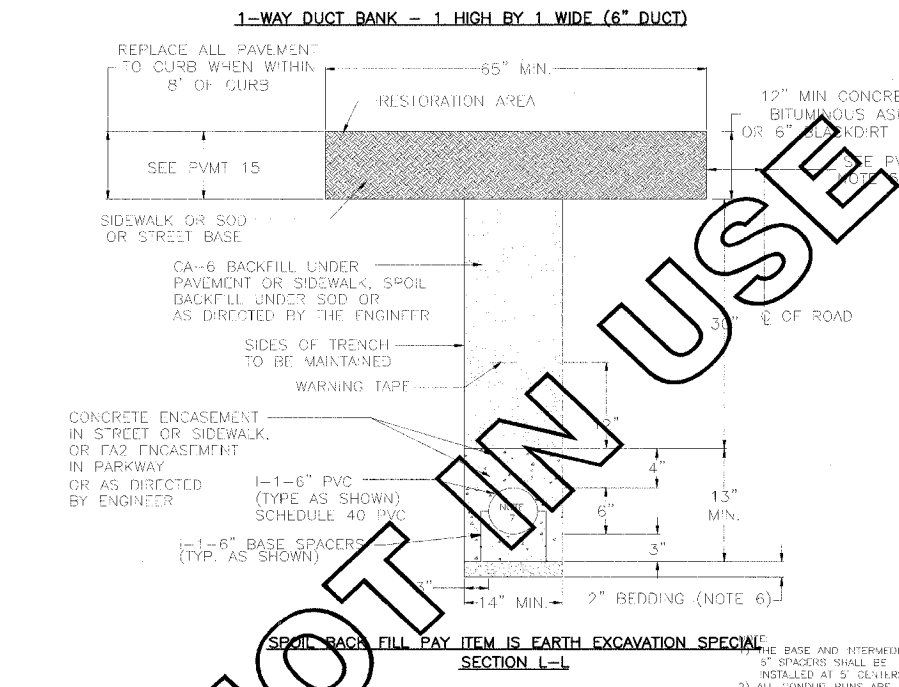

SPoil BACK FILL PAY ITEM IS EARTH EXCAVATION SPECIAL SECTION L-L

NOTE:

- 1) THE BASE AND INTERMEDIATE 6" SPACERS SHALL BE INSTALLED AT 5' CENTERS.
- 2) ALL CONDUIT RUNS ARE ASSEMBLED IN FIELD.
- 3) INSTALL 1/8" DIA. (PULLING) NYLON ROPE IN EACH DUCT.
- 4) ALL CABLES BY OTHERS.
- 5) CONDUIT AND SPACERS AND ALL OTHER MATERIALS INCLUDING GLUE, COUPLINGS AND MANHOLE ENTRANCES FURNISHED BY CITY OF NAPERVILLE AND INSTALLED BY CONTRACTOR.
- 6) INSTALL BEDDING FA-2 OR CA-6.
- 7) INSTALL MULE TAPE OR #12 COPPER WIRE THIN IN THIS DUCT ONLY.
- 8) CONTRACTOR TO SUPPLY PLASTIC TIES TO HOLD 3", 5", AND 6" CONDUIT TO 6" SPACERS.
- 9) CONTRACTOR TO INSTALL DUCT RUN PER C30-1900.

CITY OF NAPERVILLE
DEPARTMENT OF PUBLIC UTILITIES-ELECTRIC
TYPICAL CONDUIT SECTION L-L
75TH STREET

APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE SPOIL BACKFILL
APPROXIMATE LENGTH = ? FEET. CONCRETE ENCASE CA-6 BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) CA-6 BACKFILL

SPoil BACK FILL PAY ITEM IS EARTH EXCAVATION SPECIAL SECTION M-M

NOTE:

- 1) THE BASE AND INTERMEDIATE 6" SPACERS SHALL BE INSTALLED AT 5' CENTERS.
- 2) ALL CONDUIT RUNS ARE ASSEMBLED IN FIELD.
- 3) INSTALL 1/8" DIA. (PULLING) NYLON ROPE IN EACH DUCT.
- 4) ALL CABLES BY OTHERS.
- 5) CONDUIT AND SPACERS AND ALL OTHER MATERIALS INCLUDING GLUE, COUPLINGS AND MANHOLE ENTRANCES FURNISHED BY CITY OF NAPERVILLE AND INSTALLED BY CONTRACTOR.
- 6) INSTALL BEDDING FA-2 OR CA-6.
- 7) INSTALL MULE TAPE OR #12 COPPER WIRE THIN IN THIS DUCT ONLY.
- 8) CONTRACTOR TO SUPPLY PLASTIC TIES TO HOLD 3", 5", AND 6" CONDUIT TO 6" SPACERS.
- 9) CONTRACTOR TO INSTALL DUCT RUN PER C30-1900.

CITY OF NAPERVILLE
DEPARTMENT OF PUBLIC UTILITIES-ELECTRIC
TYPICAL CONDUIT SECTION M-M
75TH STREET

APPROXIMATE LENGTH = 30 FEET CONCRETE ENCASE SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) CONCRETE ENCASE CA-6 BACKFILL
APPROXIMATE LENGTH = 60 FEET (FA2 ENCASED) SPOIL BACKFILL
APPROXIMATE LENGTH = (NONE) (FA2 ENCASED) CA-6 BACKFILL

1) RESTORATION BY ELECTRICAL CONTRACTOR IS TEMPORARY, AND SHALL BE MAINTAINED BY THE ELECTRICAL CONTRACTOR UNTIL FINAL RESTORATION BY ROAD CONTRACTOR. (UNLESS NOTED)

2) ROUGH GRADE AREA TO WITHIN 4" OF FINAL GRADE.

3) ELECTRICAL CONTRACTOR TO COORDINATE WITH RESIDENT ENGINEER.

WF# INFORMATION		
WF# 59481	WASHINGTON ST. 75TH TO OLYMPIUS DR. EAST SIDE	JOB 1 EU-73
WF# 59482	75TH WASHINGTON ST. TO OLYMPIUS DR. NORTH SIDE	JOB 2 EU-73
WF# 59484	75TH WASHINGTON ST. TO CLYDE DR. SOUTH SIDE	JOB 3 EU-73
WF# 59485	WASHINGTON ST. 75TH TO BAILEY RD. EAST SIDE	JOB 4 EU-73

CITY OF NAPERVILLE/DEPARTMENT OF PUBLIC UTILITIES - ELECTRIC

CALL J.U.L.I.E. 48 HRS. PRIOR TO CONSTRUCTION

PROJECT TITLE	75TH ST. AND WASHINGTON ST. ROAD IMPROVEMENTS	MAP NO.		CAD FILE:	0056270001D20.DWG
PROJECT DESCRIPTION	TRENCH SECTION DETAILS	DRAWN BY:	JK, PM	PROJECT NO.:	EU12-05-03
DATE	4-01-08	WORK REQUEST NO.	56270	ISSUED	
ISSUED		APPROV.		SCALE:	NTS
ENGINEER	RPS	REVISION		SHEET	20 OF 73