


ASSEMBLY CODES		
CODE	QTY	DESCRIPTION
DEHn	1	SPLICE BOX
DnBxxP	**	BEND, PVC
DnBxxS	**	BEND, STEEL
UGHn	1	GROUNDING HANDHOLE

n dependent on size  
xx bend angle dependent on field condition (typically 30°)  
\*\* quantity is dependent on application

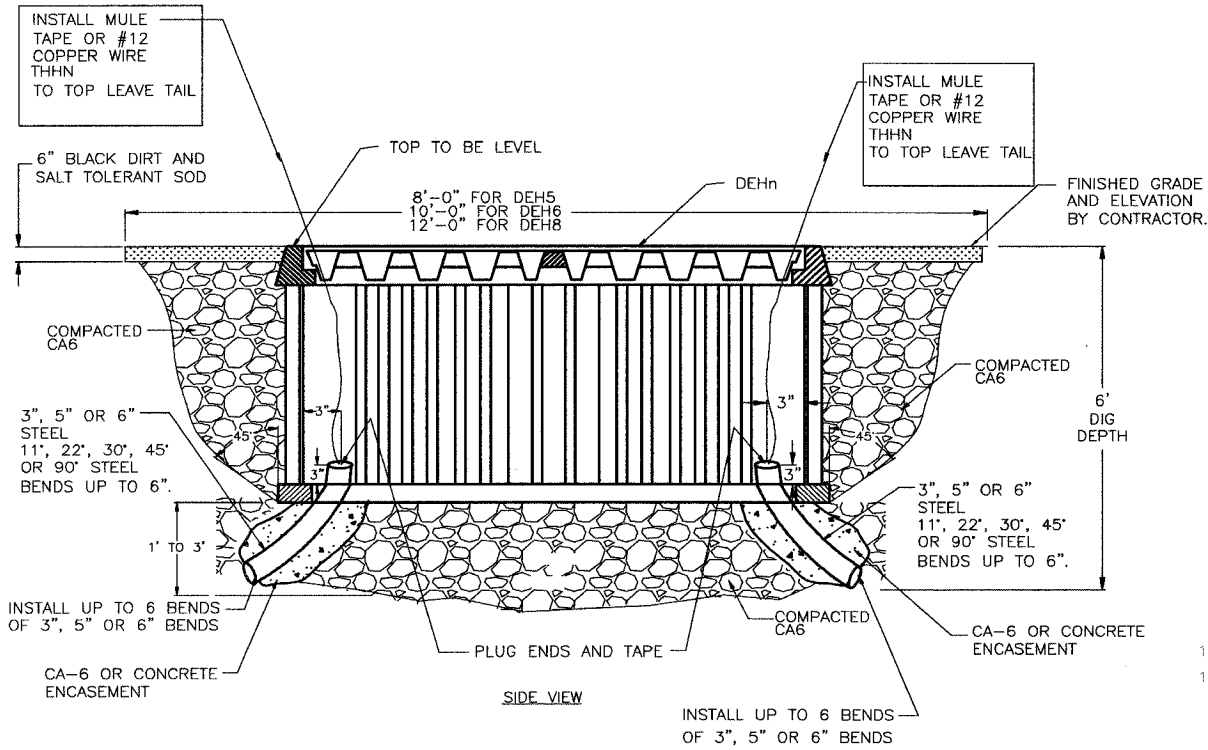

- NOTE:
- BENDS SHALL BE INSTALLED PER FIELD CONDITION.
  - SPARES NOT SHOWN.
  - GROUNDING WILL NOT BE INSTALLED AT TIME OF HANDHOLE INSTALLATION, BUT WILL BE INSTALLED WITH SPLICE.
  - BREAK-AWAY MUST BE WRAPPED WITH AQUA SEAL MASTIC TO PREVENT TEARING OF HEAT SHRINK WRAP AROUND SLEEVE.
  - INSTALL COVERS BEFORE BACKFILLING OPERATIONS TO HELP SUPPORT UPPER BOX SECTION WHILE EARTH IS PLACED AND COMPACTED.
  - EXCAVATION:  
8' LONG BY 6' DEEP BY 6' WIDE DEH5.  
10' LONG BY 6' DEEP BY 6' WIDE DEH6.  
12' LONG BY 6' DEEP BY 6' WIDE DEH8.
  - BACK FILL WITH COMPACTED CA6.
  - CUT HANDHOLE TO INSTALL PIPE, IF REQUIRED.
  - ALL MATERIALS BY THE CITY EXCEPT BACKFILL AND RESTORATION.
  - CABLE WORK NOT REQUIRED.
  - RESTORATION BY CONTRACTOR.

DEHn: HANDHOLE (SPLICE BOX)

Item Code	Description 1	Description 2	DEH			
			5	6	8	8A
284 104 00010	HANDHOLE	36" X 60" X 36"	1			
284 104 00020	HANDHOLE	48" X 78" X 36"		1		
284 104 00030	HANDHOLE	48" X 96" X 36"			1	
284 104 00040	HANDHOLE, ADJUSTABLE	48" X 96" X 36"				1

DnBxxP: BEND, PVC

Assembly	Item Code	Description 1	Description 2	Qty
D3B30P	285 101 00025	ELBOW, PVC 30 DEG 3"	STANDARD RADIUS SCH 40	1
D3B45P	285 101 00030	ELBOW, 36"R PVC 45 DEG 3"	SCH 40	1
D3B90P	285 101 00040	ELBOW, 36"R PVC 90 DEG 3"	SCH 40	1
D5B30P	285 101 00080	ELBOW, 36"R PVC 30 DEG 5"	SCH 40	1
D5B45P	285 101 00090	ELBOW, 36"R PVC 45 DEG 5"	SCH 40	1
D5B90P	285 101 00100	ELBOW, 36"R PVC 90 DEG 5"	SCH 40	1
D6B30P	285 101 00220	ELBOW, 48"R PVC 30 DEG 6"	SCH 40	1
D6B45P	285 101 00230	ELBOW, 48"R PVC 45 DEG 6"	SCH 40	1
D6B90P	285 101 00240	ELBOW, 48"R PVC 90 DEG 6"	SCH 40	1

D3BxxS: BEND, 3" STEEL

Item Code	Description 1	Description 2	D3B90S Qty
285 101 00140	ELBOW, 30"R STL 90 DEG 3"	GALVANIZED	1
285 102 00040	COUPLING, PVC 3"	LONG LINE SCH 40	1

D5BxxS: BEND, 5" STEEL

Item Code	Description 1	Description 2	D5B30S Qty	D5B45S Qty	D5B90S Qty
			Qty	Qty	Qty
285 101 00160	ELBOW, 36"R STL 30 DEG 5"	GALVANIZED	1		
285 101 00170	ELBOW, 36"R STL 45 DEG 5"	GALVANIZED		1	
285 101 00180	ELBOW, 36"R STL 90 DEG 5"	GALVANIZED			1
285 102 00110	COUPLING, PVC 5"	LONG LINE SCH 40	1	1	1

D6BxxS: BEND, 6" STEEL

Item Code	Description 1	Description 2	D6B11S Qty	D6B22S Qty	D6B30S Qty	D6B45S Qty	D6B90S Qty
			Qty	Qty	Qty	Qty	Qty
285 101 00186	ELBOW, 48"R STL 11 DEG 6"	GALVANIZED	1				
285 101 00188	ELBOW, 48"R 22.5 DEG 6"	GALVANIZED		1			
285 101 00190	ELBOW, 48"R STL 30 DEG 6"	GALVANIZED			1		
285 101 00200	ELBOW, 48"R STL 45 DEG 6"	GALVANIZED				1	
285 101 00210	ELBOW, 48"R STL 90 DEG 6"	GALVANIZED					1
285 102 00140	COUPLING, PVC 6"	LONG LINE SCH 40	1	1	1	1	1

UGHn: GROUNDING, HANDHOLE

Item Code	Description 1	Description 2	UGH1 Qty	UGH3 Qty
			Qty	Qty
280 107 00020	CU BARE SD	#2 SOL	10	30
283 156 00010	GROUND ROD COPPER CLAD	5/8" X 10'	1	1
286 100 00320	CONNECTOR, WEDGE CU	4/0 STR(7) - 5/8" ROD	1	1
286 101 00010	SHELL, WEDGE AMF	BLUE	1	1
286 199 00210	CONNECTOR, BREAK-AWAY CU	2SOL-2/OSTR X 2SOL 2/OSTR		2

WF# INFORMATION		CITY OF NAPERVILLE/DEPARTMENT OF PUBLIC UTILITIES - ELECTRIC			
WF# 59481 WASHINGTON ST. 75TH TO OLYMPUS DR. EAST SIDE	JOB 1 EU-73	PROJECT TITLE 75TH ST. AND WASHINGTON ST. ROAD IMPROVEMENTS		MAP NO.:	CAD FILE: D056270001D40.DWG
WF# 59482 75TH WASHINGTON ST. TO OLYMPUS DR. NORTH SIDE	JOB 2 EU-73	PROJECT DESCRIPTION TRENCH SECTION DETAILS		DRWN BY: JK, PM	PROJECT NO.: EU72-08-03 EU73
WF# 59484 75TH WASHINGTON ST. TO CLYDE DR. SOUTH SIDE	JOB 3 EU-73	DATE 4-01-08	WORK REQUEST NO. 56270	ISSUED	COMPLETED BY:
WF# 59485 WASHINGTON ST. 75TH TO BAILEY RD. EAST SIDE	JOB 4 EU-73	ENGINEER RPS	APPR:	SCALE: NTS	SHEET 40 OF 73
		REVISION			

CALL J.U.L.I.E. 48 HRS. PRIOR TO CONSTRUCTION