CONTRACT NO. 97340

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
9306	04-00042-01-PV	MONROE	39	8
STA. 26+64.28	TO STA. 36+51.56			
TYPICAL SECTIONS				
FEDERAL AID PROJECT				

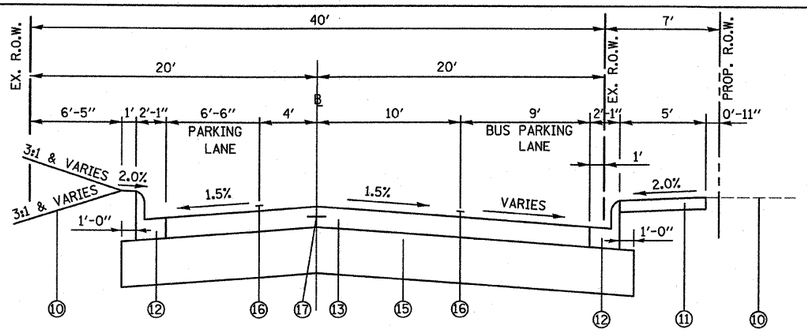

PROPOSED LEGION STREET
STA. 31+03.20 TO STA. 31+72.99

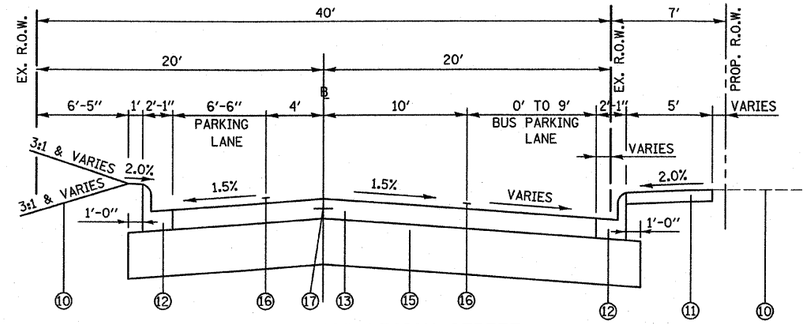

PROPOSED LEGION STREET
STA. 30+93.18 TO STA. 31+03.20
STA. 31+72.99 TO STA. 31+82.99

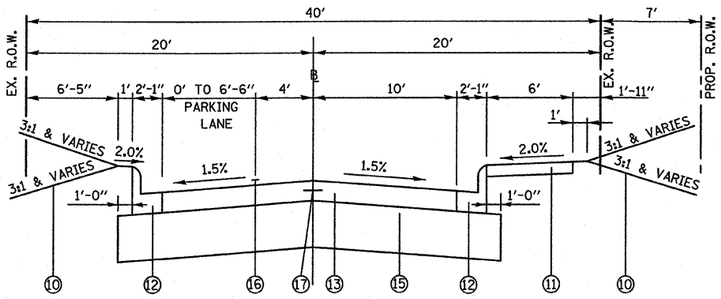

PROPOSED LEGION STREET
STA. 29+07.99 TO STA. 30+93.18
STA. 31+82.99 TO STA. 32+72.61

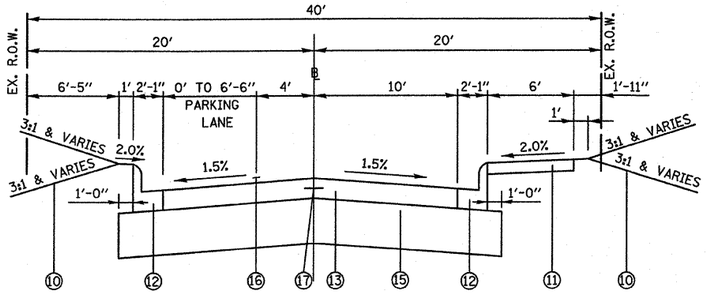

PROPOSED LEGION STREET
STA. 26+64.28 TO STA. 29+07.99

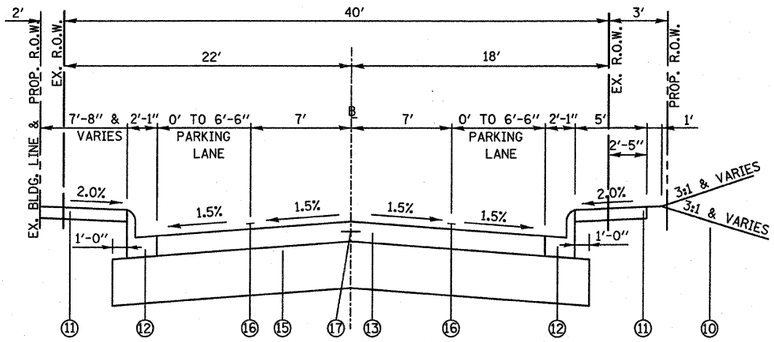

PROPOSED LEGION STREET
STA. 35+51.01 TO STA. 36+51.06

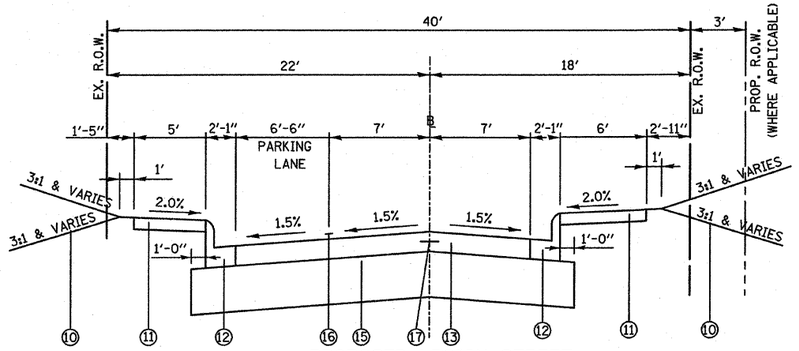

PROPOSED LEGION STREET
STA. 33+22.65 TO STA. 35+51.01

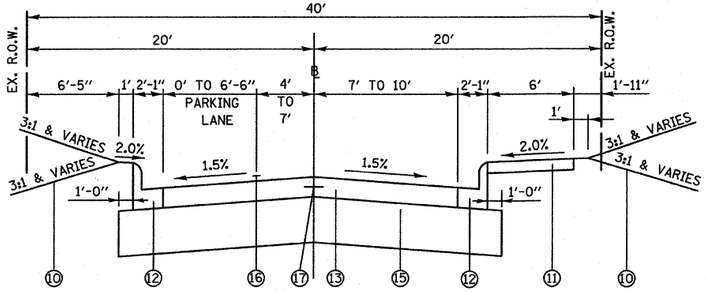

PROPOSED LEGION STREET
STA. 32+72.61 TO STA. 33+22.65

① EXISTING OIL & CHIP ROADWAY

② EXISTING COMBINATION CONCRETE CURB & GUTTER

③ EXISTING EARTH AREA

④ EXISTING CONCRETE SIDEWALK

⑤ EXISTING AGGREGATE SURFACE

⑥ EXISTING ASPHALT PARKING

⑦ EXISTING CONCRETE ROADWAY

⑧ EXISTING CONCRETE CURB

⑨ EXISTING CONCRETE PARKING

⑩ PROPOSED GRASS AREA

⑪ PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK, 4″

⑫ PROPOSED COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.18

⑬ PROPOSED PCC PAVEMENT, 7″
- a. SEE HIGHWAY STANDARD BLR 10 FOR:
  - -PAVEMENT JOINT LAYOUT DETAILS.
  - -TRANSVERSE JOINT DETAILS.
  - -EXPANSION JOINT DETAILS.
- b. SEE HIGHWAY STANDARD 420001 FOR:
  - -LONGITUDINAL JOINT DETAILS.
- c. SEE HIGHWAY STANDARD 606001 FOR:
  - -TIE BAR DETAILS ALONG THE EXISTING CURB.
- d. PORTLAND CEMENT CONCRETE SHALL HAVE TYPE A FINISH.

⑭ RESERVED

⑮ PROPOSED AGGREGATE BASE COURSE, TYPE A, 12″

⑯ PROPOSED PAVEMENT MARKING LINE - 4″ (SOLID WHITE)

⑰ LONGITUDINAL SAWED JOINT, KEY JOINT, OR CONSTRUCTION JOINT (SEE PAVEMENT JOINT LAYOUT SHEETS)

MIXTURE REQUIREMENTS

20 YR ESAL'S	
MIXTURE USE	INCIDENTAL HOT-MIX ASPHALT SURF
AC/PG	PG 64-22
RAP% (MAX)	15%
DESIGN AIR VOIDS	4.0% @ NDES=50
MIX COMPOSITION (GRADATION MIXTURE)	
FRICTION AGG	MIXTURE C

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

PROPOSED TYPICAL SECTIONS

LEGION STREET
SECTION 04-00042-01-PV
MONROE COUNTY

PLOT DATE = 7/14/2020
FILE NAME = &FILE&
PLOT SCALE = &SCALE&
USER NAME = &USER&