

WEST EDGE OF SHOULDER

Location	Station	Offset (ft.)	Theoretical Grade Elevations
S. End of N. Approach	734+43.50	-16.00	636.46
A3	734+53.50	-16.00	636.57
A4	734+63.50	-16.00	636.69
N. End of N. Approach	734+73.50	-16.00	636.82

WEST EDGE OF PAVEMENT

Location	Station	Offset (ft.)	Theoretical Grade Elevations
S. End of N. Approach	734+43.50	-12.00	636.54
A3	734+53.50	-12.00	636.65
A4	734+63.50	-12.00 </td <td>636.77</td>	636.77
N. End of N. Approach	734+73.50	-12.00	636.90

CL IL RTE. 92 & PROFILE GRADE LINE

Location	Station	Offset (ft.)	Theoretical Grade Elevations
S. End of N. Approach	734+43.50	0.00	636.73
A3	734+53.50	0.00	636.84
A4	734+63.50	0.00	636.96
N. End of N. Approach	734+73.50	0.00	637.09




EAST EDGE OF PAVEMENT

Location	Station	Offset (ft.)	Theoretical Grade Elevations
S. End of N. Approach	734+43.50	12.00	636.54
A3	734+53.50	12.00	636.65
A4	734+63.50	12.00	636.77
N. End of N. Approach	734+73.50	12.00	636.90

EAST EDGE OF SHOULDER

Location	Station	Offset (ft.)	Theoretical Grade Elevations
S. End of N. Approach	734+43.50	16.00	636.46
A3	734+53.50	16.00	636.57
A4	734+63.50	16.00	636.69
N. End of N. Approach	734+73.50	16.00	636.82

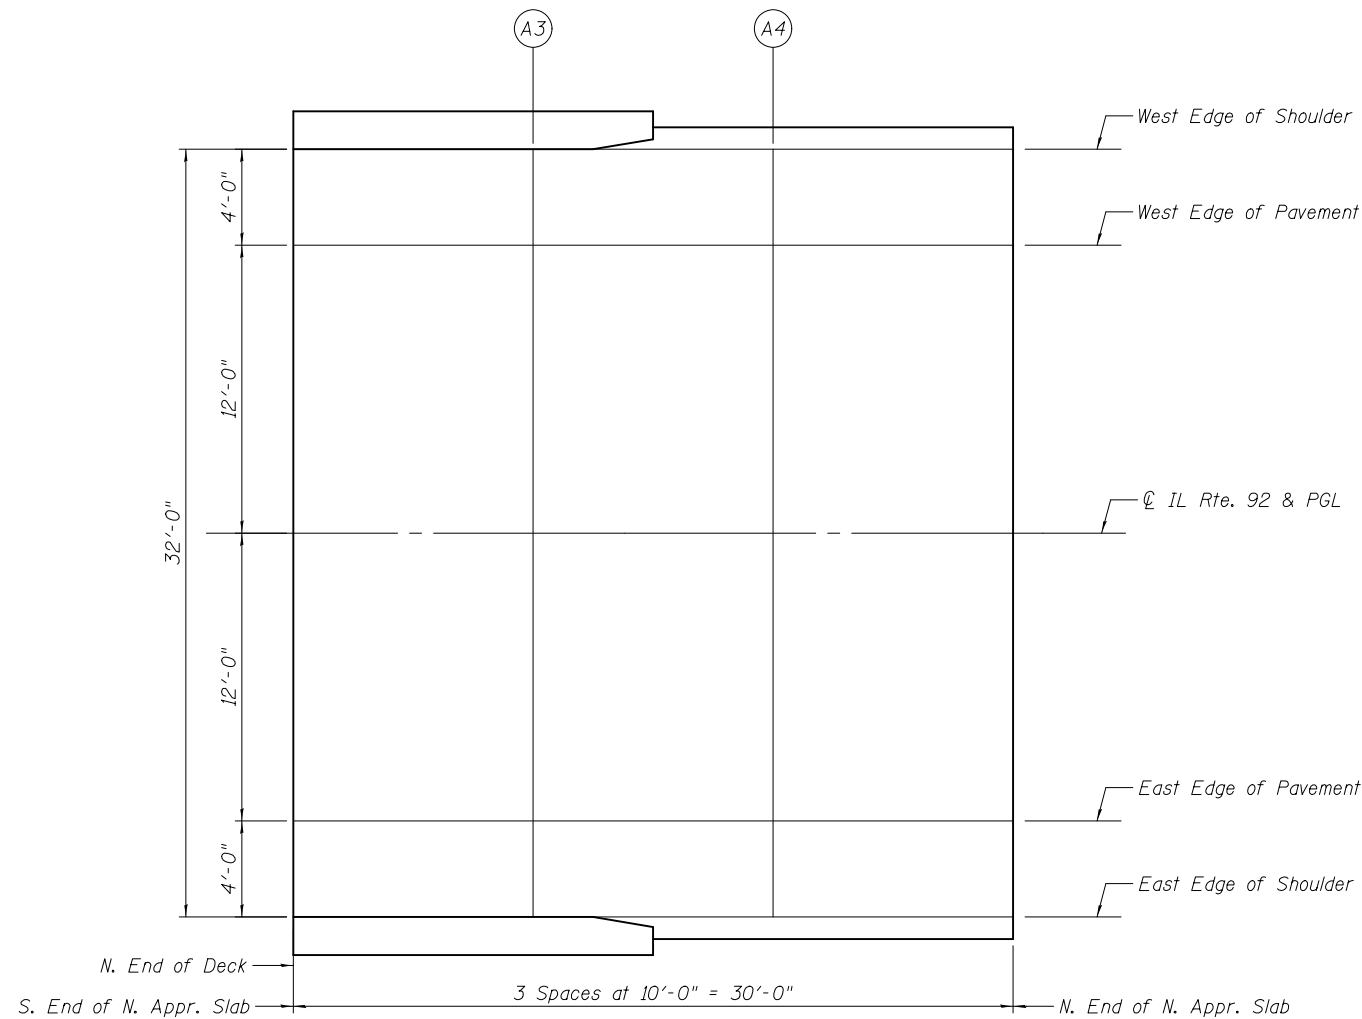

PLAN

Note:
Offsets are measured from CL IL Rte. 92 & PGL.

6/19/2013 5:32:06 PM 0810196_64D18_008_T0A02.dgn



DESIGNED - MWS	REVISED -
CHECKED - TAY	REVISED -
DRAWN - MWS	REVISED -
CHECKED - BJM	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TOP OF NORTH APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0196**

F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
599	103MFT-BR	ROCK ISLAND	88	39
CONTRACT NO. 64D18			ILLINOIS FED. AID PROJECT	

SHEET NO. 8 OF 20 SHEETS