



**PLAN
PAVEMENT REMOVAL**

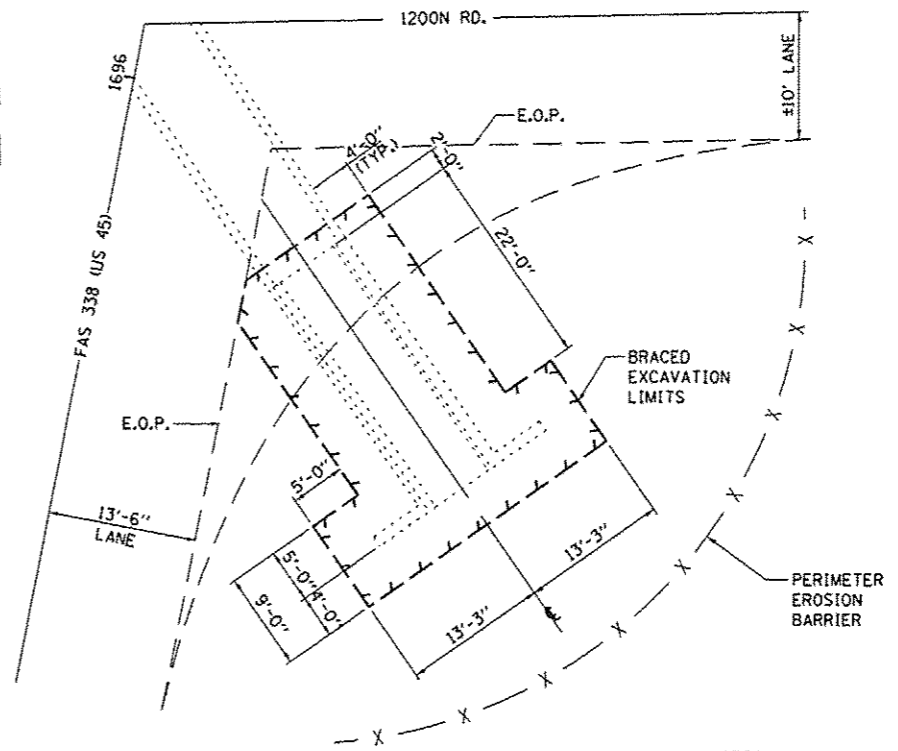


**PLAN
BRACED EXCAVATION**

NOTES:
EXCAVATED MATERIALS DEEMED SUITABLE FOR RECONSTRUCTION SHALL BE STOCKPILED AND USED FOR BACKFILLING OPERATIONS.

EXCAVATED MATERIALS DEEMED UNSUITABLE FOR CONSTRUCTION SHALL BE DISPOSED OF AS SPECIFIED ELSEWHERE ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

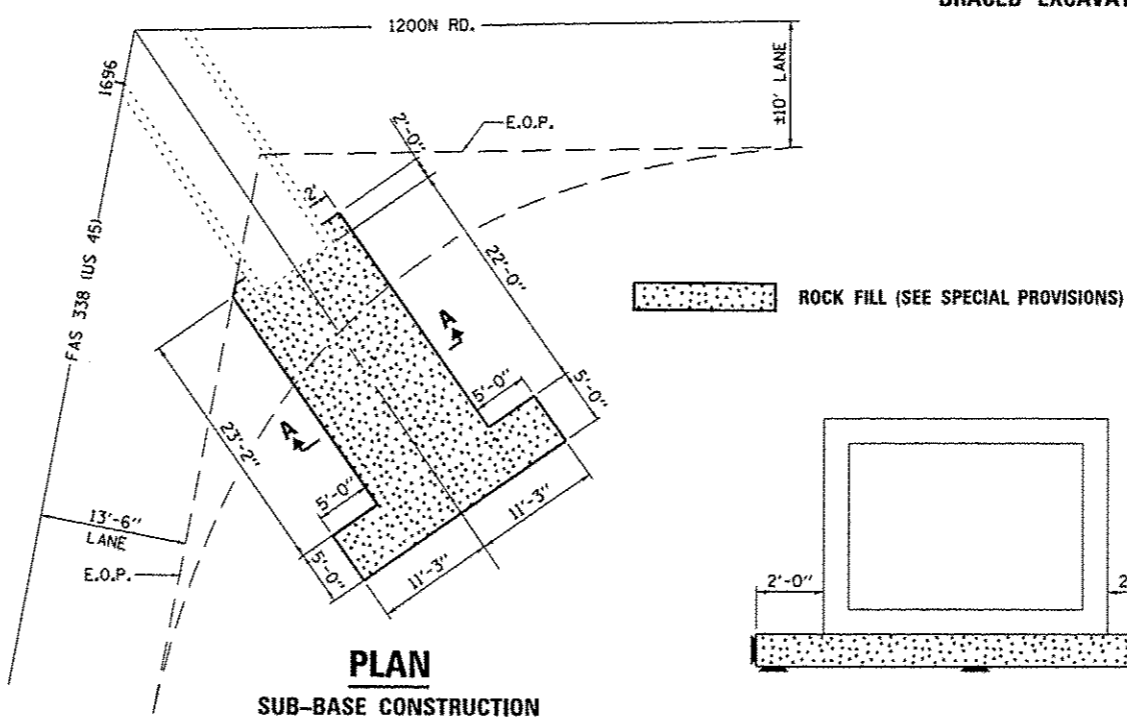

**PLAN
SUB-BASE CONSTRUCTION**

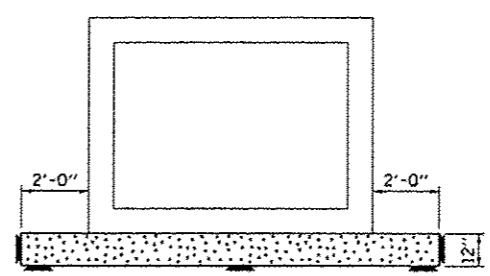

SECTION A-A

BILL OF MATERIALS

ITEM	UNIT	TOTAL
PAVEMENT REMOVAL	SO YD	18
BRACED EXCAVATION	CU YD	146.7
PERIMETER EROSION BARRIER	FOOT	100
ROCK FILL	CU YD	40

FILE NAME :	USER NAME : patelyj	DESIGNED - RW	REVISED -
c:\pawork\pawidat\patelyj\10332421\0366079-ah1-detail1.dgn		DRAWN - RW	REVISED -
	PLOT SCALE = 100.0000 1/1 in.	CHECKED -	REVISED -
	PLOT DATE = 7/9/2013	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

CONSTRUCTION DETAILS

SCALE: SHEET 2 OF 4 SHEETS STA. 1695+95

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
338	(35)C	IRROUOIS	10	8
			CONTRACT NO. 66C79	
ILLINOIS FED. AID PROJECT				