



PIER 2
(Looking North)

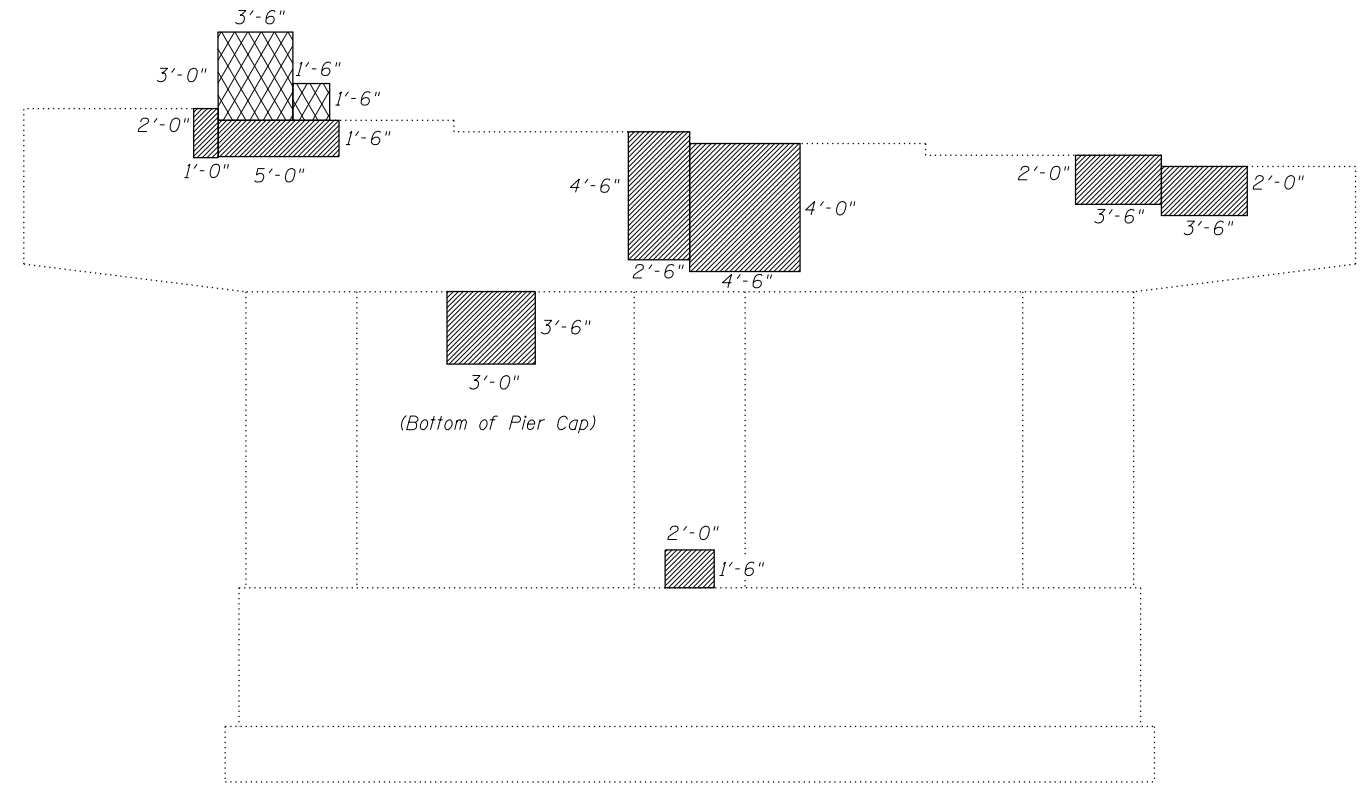

PIER 2
(Looking South)

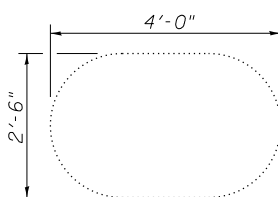

SECTION A-A
Typical Section
Through Column

- Indicates Concrete Removal (Special)
- Indicates Structural Repair of Concrete

Notes:
 Rubbed finish for Structural Repair of Concrete areas shall be completed according to Article 503.15 of the Standard Specifications.
 The quantities shown are for estimating purposes only. The area to be repaired will be determined by the Engineer at the time of construction. Actual repair locations shall be shown on As-built plans.

BILL OF MATERIAL

Item	Unit	Total
Rubbed Finish	Sq. Ft.	119
Concrete Removal (Special)	Sq. Yd.	3.0
Structural Repair of Concrete (Depth equal to or less than 5")	Sq. Ft.	119

FILE NAME = 0250002-74295-028.dgn	USER NAME =	DESIGNED - BB	REVISED -
BERNHARDEN * LOCHMULLER & ASSOCIATES, INC. 3 OAK DRIVE MARYVILLE, IL 62442 PHONE (618) 281-4666 FAX (618) 281-4666	CHECKED - ACS	DRAWN - WJS	REVISED -
PLOT SCALE =	DRAWN - WJS	CHECKED - CJF & BB	REVISED -
PLOT DATE = 1:56:20 PM 8/15/2013	CHECKED - CJF & BB	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PIER 2 REPAIR DETAILS
STRUCTURE NO. 025-0002

SHEET NO. 28 OF 28 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(25-4HB)I-4	EFFINGHAM	1760	1705
SN 025-0002		CONTRACT NO. 74295		
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT				