

002

09-20-2019 LETTING ITEM 002

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. D-9 HT PVMNT MRK RPR 20-23	VARIOUS	ILLINOIS	5	1
CONTRACT NO. 46535				

D-9

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


**PROPOSED
HIGHWAY PLANS**

VARIOUS ROUTES
D-9 HT PVMNT MRK RPR 20-23

VARIOUS COUNTIES

M-60-016-20

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 3-5

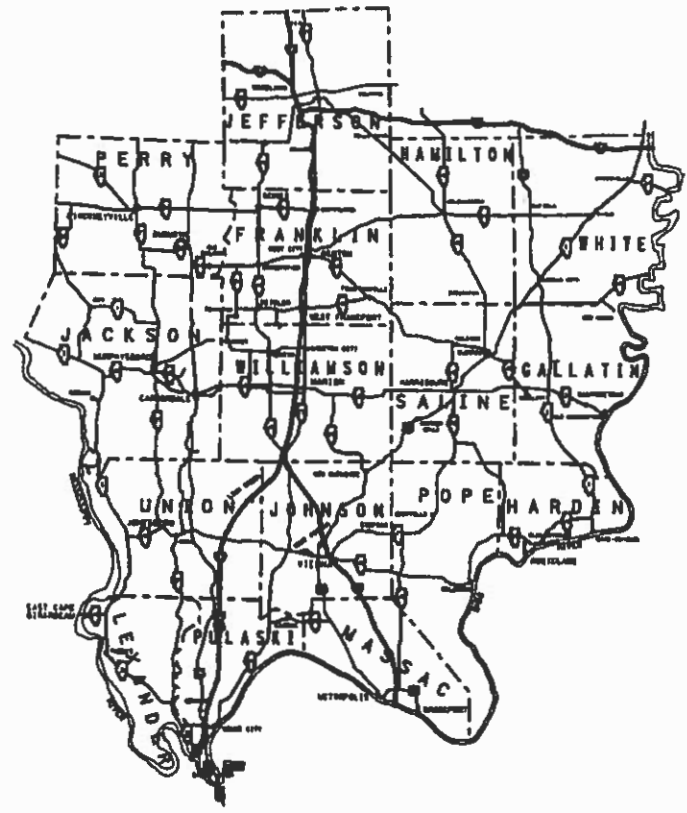

J.U.L.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 07-10 20 19

[Signature]
REGION FIVE ENGINEER

Aug 16 20 19

[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

Aug 16 20 19

[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PROJECT ENGINEER : SUSAN POE

CONTRACT NO. 46535

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET, INDEX OF SHEETS, STANDARDS
3-5	SUMMARY OF QUANTITIES

LIST OF STANDARDS

- 000001-07 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701311-03 LANE CLOSURE 2L, 2W MOVING OPERATIONS - DAY ONLY
- 701426-09 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS
FOR SPEEDS \geq 45 MPH
- 701427-05 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATIONS
FOR SPEEDS \leq 45 MPH
- 701901-08 TRAFFIC CONTROL DEVICES
- 780001-05 TYPICAL PAVEMENT MARKINGS

Prepared By: Charles Steir
DISTRICT STUDIES & PLANS ENGINEER

Examined By: Nancy Lee
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Carrie
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: Kelley
DISTRICT OPERATIONS ENGINEER

Examined By: [Signature]
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: _____
DISTRICT CONSTRUCTION ENGINEER

Examined By: [Signature]
DISTRICT MATERIALS ENGINEER

SUMMARY OF QUANTITIES

COUNTY: VARIOUS
 ROUTE: VARIOUS
 FUNDING: 100% STATE

CODE NUMBER	ITEM DESCRIPTION	UNIT	ROADWAY 0021
78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	20,000
78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	4,000
78000300	THERMOPLASTIC PAVEMENT MARKING - LINE 5"	FOOT	500
78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	500
78000500	THERMOPLASTIC PAVEMENT MARKING - LINE 8"	FOOT	200
78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	500
78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	20,000
78003100	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LETTERS AND SYMBOLS	SQ FT	100
78003110	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 4"	FOOT	50
78003120	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 5"	FOOT	50
78003130	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 6"	FOOT	50
78003140	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 8"	FOOT	50
78003150	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 12"	FOOT	50
78003180	PREFORMED PLASTIC PAVEMENT MARKING, TYPE B - LINE 24"	FOOT	100
78008210	POLYUREA PAVEMENT MARKING TYPE I - LINE 4"	FOOT	100

SUMMARY OF QUANTITIES - CONT

COUNTY: VARIOUS
 ROUTE: VARIOUS
 FUNDING: 100% STATE

CODE NUMBER	ITEM DESCRIPTION	UNIT	ROADWAY 0021
78008220	POLYUREA PAVEMENT MARKING TYPE I - LINE 5"	FOOT	100
78008230	POLYUREA PAVEMENT MARKING TYPE I - LINE 6"	FOOT	100
78008240	POLYUREA PAVEMENT MARKING TYPE I - LINE 8"	FOOT	100
78008310	POLYUREA PAVEMENT MARKING TYPE II - LINE 4"	FOOT	100
78008320	POLYUREA PAVEMENT MARKING TYPE II - LINE 5"	FOOT	100
78008330	POLYUREA PAVEMENT MARKING TYPE II - LINE 6"	FOOT	100
78008340	POLYUREA PAVEMENT MARKING TYPE II - LINE 8"	FOOT	100
78009000	MODIFIED URETHANE PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	5,000
78009004	MODIFIED URETHANE PAVEMENT MARKING - LINE 4"	FOOT	200,000
78009005	MODIFIED URETHANE PAVEMENT MARKING - LINE 5"	FOOT	1,000
78009006	MODIFIED URETHANE PAVEMENT MARKING - LINE 6"	FOOT	500
78009008	MODIFIED URETHANE PAVEMENT MARKING - LINE 8"	FOOT	1,000
78009012	MODIFIED URETHANE PAVEMENT MARKING - LINE 12"	FOOT	1,000
78009024	MODIFIED URETHANE PAVEMENT MARKING - LINE 24"	FOOT	5,000
X0327979	PAVEMENT MARKING REMOVAL - GRINDING	SQ FT	5,000

SUMMARY OF QUANTITIES - CONT

COUNTY:	VARIOUS
ROUTE:	VARIOUS
FUNDING:	100% STATE

CODE NUMBER	ITEM DESCRIPTION	UNIT	ROADWAY 0021
X0327980	PAVEMENT MARKING REMOVAL - WATER BLASTING	SQ FT	5,000
X7800815	HOT SPRAY THERMOPLASTIC PAVEMENT MARKING LINE - 4 INCH	FOOT	2,000,000
X7800825	HOT SPRAY THERMOPLASTIC PAVEMENT MARKING LINE - 5 INCH	FOOT	100,000
X7800835	HOT SPRAY THERMOPLASTIC PAVEMENT MARKING LINE - 6 INCH	FOOT	200
X7800845	HOT SPRAY THERMOPLASTIC PAVEMENT MARKING LINE - 8 INCH	FOOT	20,000
X7830068	GROOVING FOR RECESSED PAVEMENT MARKING, LETTERS, NUMBERS AND SYMBOLS	SQ FT	3,000
X7830070	GROOVING FOR RECESSED PAVEMENT MARKING 5"	FOOT	5,000
X7830072	GROOVING FOR RECESSED PAVEMENT MARKING 6"	FOOT	1,000
X7830074	GROOVING FOR RECESSED PAVEMENT MARKING 7"	FOOT	500
X7830076	GROOVING FOR RECESSED PAVEMENT MARKING 9"	FOOT	500
X7830078	GROOVING FOR RECESSED PAVEMENT MARKING 13"	FOOT	5,000
X7830090	GROOVING FOR RECESSED PAVEMENT MARKING 25"	FOOT	2,000
Z0008758	AERIAL SPEED CHECK MARKING	FOOT	50