

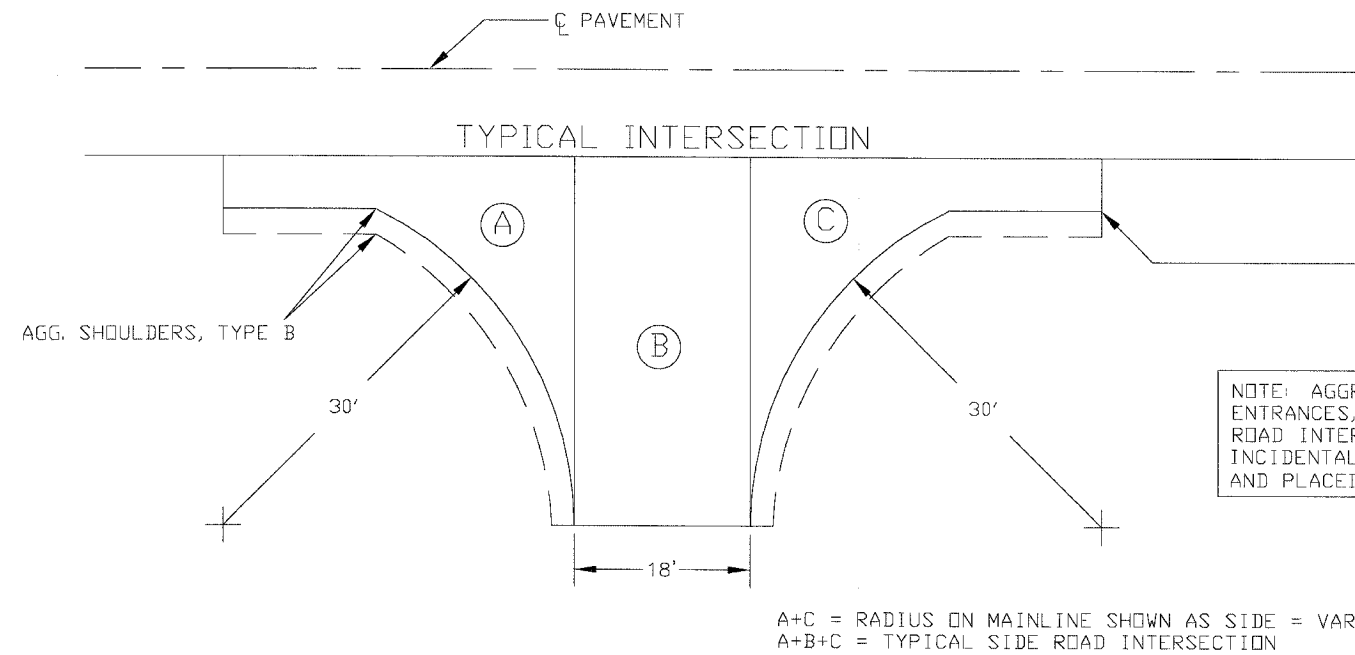


ROUTE NO. FAS 330	SECTION 04-00220-04-RS	COUNTY IROQUOIS	TOTAL SHEETS 4	SHEET NO. 4
F. H. W. A. REG. 4 ILLINOIS			PROJECT RS 330(107)	
CONTRACT 87305				

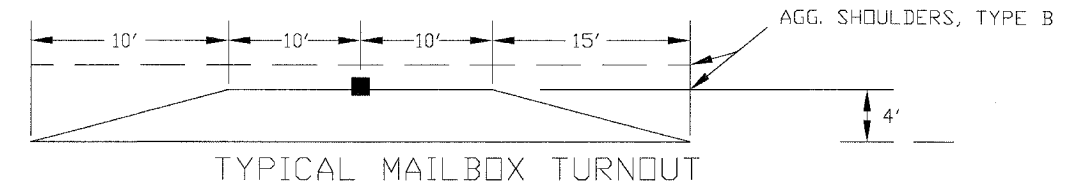

NOTE: AGGREGATE AROUND ALL PRIVATE ENTRANCES, MAIL BOX TURNOUTS AND SIDE ROAD INTERSECTIONS SHALL BE CONSIDERED INCIDENTAL TO AGGREGATE SHOULDERS, TYPE B AND PLACED AS DIRECTED BY THE ENGINEER.

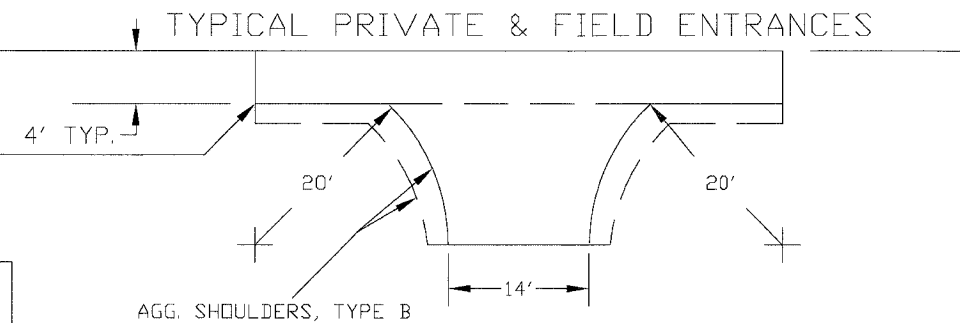

TYPICAL MAILBOX TURNOUT

STATION	SIDE	SQ. YD.	TON	STATION	SIDE	SQ. YD.	TON
111+73	LT	15	4	261+45	RT	15	4
113+65	LT	15	4	281+05	RT	15	4
147+10	LT	15	4	291+90	RT	15	4
211+93	RT	15	4	327+00	RT	15	4
228+18	RT	15	4	340+84	RT	15	4
TOTALS		150 SQ YDS	40 TON				

TYPICAL PRIVATE ENTRANCES

STATION	TYPE	SIDE	SQ. YD.	TON	STATION	TYPE	SIDE	SQ. YD.	TON
112+00	PE	RT	57	8	258+55	PE	LT	57	8
113+73	PE	RT	57	8	259+75	PE	LT	57	8
*131+81	PE	RT	20	4	261+15	PE	LT	57	8
*135+16	PE	RT	20	4	*267+61	PE	RT	20	4
146+54	PE	RT	57	8	280+78	PE	RT	57	8
175+87	PE	LT	57	8	292+10	PE	LT	57	8
212+60	PE	LT	57	8	294+10	PE	LT	57	8
218+09	PE	LT	57	8	327+59	PE	RT	57	8
220+73	PE	LT	57	8	*341+17	PE	RT	20	4
225+68	PE	LT	57	8	341+61	PE	RT	57	8
227+93	PE	RT	57	8	368+09	PE	RT	57	8
*249+76	PE	LT	20	4	373+54	PE	LT	57	8
257+90	PE	LT	57	8	374+60	PE	LT	57	8
TOTALS				1297 SQ YD					188 TON

NOTE: ALL PRIVATE ENTRANCES, MAIL BOX TURNOUTS AND SIDE ROAD INTERSECTIONS SHALL BE PAID FOR AS INCIDENTAL HOT-MIX ASPHALT SURFACING - TOTAL 423 TON.

TYPICAL INTERSECTION

STATION	SIDE	WIDTH	SQ. YD.	TON	STATION	SIDE	WIDTH	SQ. YD.	TON
161+37	TR 330	LT	18'	138	307+62	TR 390A	RT	18'	138
161+38	TR 330	RT	18'	138	347+60	TR 404	LT	18'	138
201+33	CH 15	LT	18'	138	347+62	TR 404	RT	18'	138
201+33	CH 15	RT	18'	138	381+28	SCHOOL ST	RT	18'	138
227+64	TR 348	LT	18'	138	384+27	PICKAMINCH ST	RT	18'	138
254+19	TR 362A	LT	18'	138	387+40	SPRING ST	RT	18'	138
307+62	TR 390A	LT	18'	138					
TOTALS				1794 SQ YD					195 TON

* THESE ENTRANCES SHALL RECEIVE ONLY A FOUR FOOT PAVED APRON.