


**STREET LIGHTING – BILL OF MATERIAL – THIS SHEET**

PAY ITEM	UNIT	QTY
CONDUIT EMBEDDED IN STRUCTURE, 2" DIA., PVC	FOOT	1556
ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 6	FOOT	1626
ELECTRIC CABLE IN CONDUIT, 600V (XLP-TYPE USE) 1/C NO. 4	FOOT	3252
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400 WATT	EACH	14
LIGHT POLE FOUNDATION, SPECIAL	FOOT	35
LIGHT POLE, GALVANIZED STEEL, 50 FT. M.H., 12 FT. MAST ARM, TWIN	EACH	7



FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-shr-1-74-light104.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -

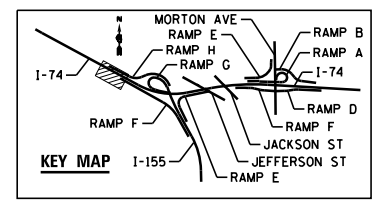

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**I-74  
LIGHTING PLANS**  
SCALE: 1"=50' SHEET NO. 6 OF 138 SHEETS STA. 501+00 TO STA. 516+00

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HVB)BRJ	TAZEWELL	ILLINOIS	2433	1721
CONTRACT NO. 68620				