


STREET LIGHTING – BILL OF MATERIAL – THIS SHEET

PAY ITEM	UNIT	QTY
UNDERGROUND CONDUIT, PVC, 2" DIA.	FOOT	60
UNIT DUCT, 600V, 2-1C NO.2, 1/C NO.4 GROUND, (XLP-TYPE USE), 1/4" DIA. POLYETHYLENE	FOOT	1543
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 250 WATT	EACH	5
LUMINAIRE, SODIUM VAPOR, HORIZONTAL MOUNT, 400 WATT	EACH	2
LIGHT POLE FOUNDATION, 30" DIAMETER	FOOT	44
BREAKAWAY DEVICE, TRANSFORMER BASE, 15 INCH BOLT CIRCLE	EACH	7
LIGHT POLE, GALVANIZED STEEL, 50 FT. M.H., 15 FT. MAST ARM	EACH	2
LIGHT POLE, GALVANIZED STEEL, 40 FT. M.H., 15 FT. MAST ARM	EACH	5



FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-sh-t-1-155-RampF-light22.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -

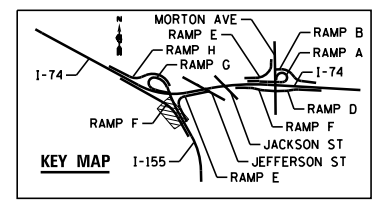

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**I-155 RAMP F
LIGHTING PLANS**

SCALE: 1"=50' SHEET NO. 21 OF 138 SHEETS STA. 326+00 TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HVB)BRJ	TAZEWELL	ILLINOIS	2433	1736
CONTRACT NO. 68620				