


NOTES:

1. ITEMS SHOWN ON THE BILL OF MATERIALS ON THIS SHEET ARE SHOWN FOR INFORMATION ONLY. ALL MATERIALS AND LABOR NECESSARY FOR THE CONSTRUCTION AND REMOVAL OF TEMPORARY LIGHTING ITEMS SHALL BE PAID FOR WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
2. WOOD POLES SHALL BE EMBEDDED 20' BELOW EXISTING GRADE.
3. MULTI-MOUNT LUMINAIRES SHALL BE TILTED 25° OR AS DIRECTED BY THE ENGINEER.

TEMPORARY LIGHTING SYSTEM – BILL OF MATERIAL – THIS SHEET

| PAY ITEM | UNIT | QTY |
|--|------|-----|
| LUMINAIRE, SODIUM VAPOR, MULTI-MOUNT, 400 WATT | EACH | 1 |
| LIGHT POLE, WOOD, 70 FOOT, CLASS 3 | EACH | 1 |
| AERIAL CABLE, 2-1/8 NO. 2 WITH MESSENGER WIRE | FOOT | 93 |

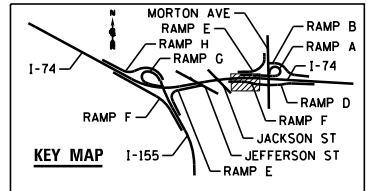

| | | |
|--|----------------------|-----------|
| FILE NAME = | DESIGNED - BENESCH | REVISED - |
| ...ND468620-sh1-1-74-TempStg03-light09.dgn | DRAWN - NLH | REVISED - |
| USER NAME = tblank | CHECKED - GHT | REVISED - |
| PLOT DATE = 9/5/2012 | DATE - JULY 20, 2012 | REVISED - |



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY LIGHTING
CONSTRUCTION STAGE 3

SCALE: 1"=50' SHEET NO. 64 OF 138 SHEETS STA. TO STA.

| | | | | |
|----------------------------|----------|--------|--------------|-----------|
| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| 90-[14R(14HB-4,14,14HB)BR] | TAZEWELL | 2433 | 1779 | |
| CONTRACT NO. 68620 | | | | |
| ILLINOIS FED. AID PROJECT | | | | |