


NOTES:

1. ITEMS SHOWN ON THE BILL OF MATERIALS ON THIS SHEET ARE SHOWN FOR INFORMATION ONLY. ALL MATERIALS AND LABOR NECESSARY FOR THE CONSTRUCTION AND REMOVAL OF TEMPORARY LIGHTING ITEMS SHALL BE PAID FOR WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
2. WOOD POLES SHALL BE EMBEDDED 20' BELOW EXISTING GRADE.
3. MULTI-MOUNT LUMINAIRES SHALL BE TILTED 25° OR AS DIRECTED BY THE ENGINEER.
4. WOOD POLE SHALL BE 100' IN LENGTH. THE POLE SHALL BE EMBEDDED TO A DEPTH OF 20'.
5. CROSSING OF AERIAL CABLES SHALL BE COORDINATED WITH AMEREN/CILCO. CLEARANCE REQUIRED BY AMEREN/CILCO SHALL BE MAINTAINED.



FILE NAME =	DESIGNED - BENESCH	REVISED -
...\\D468620-sh1-1-74-TempStg14-light08.dgn	DRAWN - NLH	REVISED -
USER NAME = tblank	CHECKED - GHT	REVISED -
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -

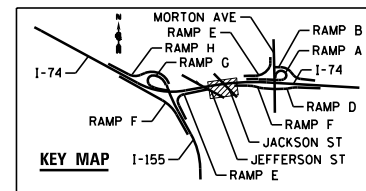

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY LIGHTING
CONSTRUCTION STAGE 14

SCALE: 1"=50' SHEET NO. 99 OF 138 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90-114R(14HB-4,14,14HVB)BRJ		TAZEWELL	2433	1814
			CONTRACT NO. 68620	
ILLINOIS FED. AID PROJECT				