

PAVED DITCH REMOVAL

STA TO STA	OFFSET	QUANTITY
STA 202+72 TO STA 207+60	RIGHT	488 FOOT
STA 208+94 TO STA 211+51	RIGHT	257 FOOT
TOTAL		745 FOOT

GUTTER REMOVAL


STA TO STA	OFFSET	QUANTITY
STA 202+56 TO STA 210+85	LEFT	829 FOOT
TOTAL		829 FOOT

REMOVING INLETS, SPECIAL

STA TO STA	OFFSET	QUANTITY
STA 202+56	LEFT	1.0 EACH
STA 206+58	LEFT	1.0 EACH
TOTAL		2.0 EACH

PIPE CULVERT REMOVAL

STA TO STA	OFFSET	QUANTITY
STA 202+56	10' TO 38' LEFT	28 FOOT
STA 206+58	10' TO 44' LEFT	34 FOOT
TOTAL		62 FOOT

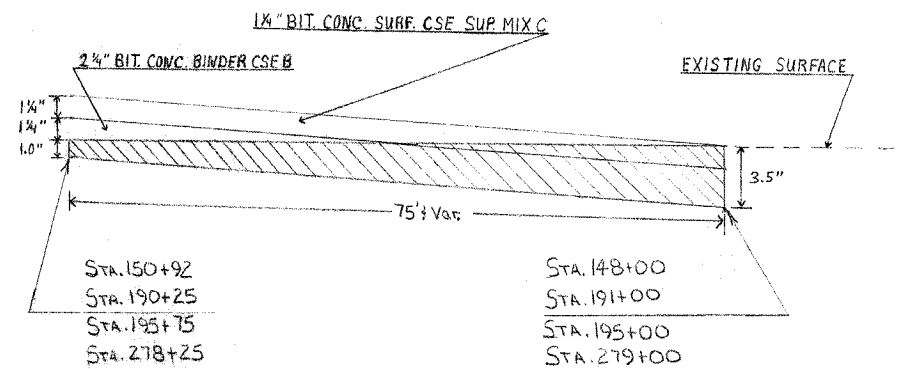


PROPOSED TYPICAL BUTT JOINT

BITUMINOUS SURFACE REMOVAL BUTT JOINT

STA TO STA	LOCATION	QUANTITY
STA 148+00 TO STA 150+92	MAINLINE (LT & RT)	713.8 SQ YD
STA 190+25 TO STA 191+00	MAINLINE (LT & RT)	183.3 SQ YD
STA 195+00 TO STA 195+75	MAINLINE (LT & RT)	183.3 SQ YD
STA 278+25 TO STA 279+00	MAINLINE (LT & RT)	183.3 SQ YD
STA 185+04 LEFT	SIDE ROAD # 1	85.8 SQ YD
STA 224+66 RIGHT	SIDE ROAD # 2	80.2 SQ YD
STA 273+38 RIGHT	CE	191.8 SQ YD
STA 277+71 LEFT	SIDE ROAD # 3	90.9 SQ YD
TOTAL		1712.4 SQ YD

BITUMINOUS SURFACE REMOVAL 1"

STA TO STA	LOCATION	QUANTITY
STA 150+92 TO STA 190+25	M.L. (LT. & RT.)	9614 SQ YD
STA 195+75 TO STA 278+25	M.L. (LT. & RT.)	20167 SQ YD
TOTAL		29781 SQ YD

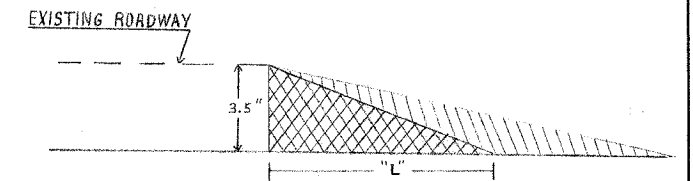

EXISTING ROADWAY
3.5"
"L"
MILLED AREA
TAPER RATE $L = 40 \times (L)$
TEMPORARY RAMP

PROPOSED TYPICAL TEMPORARY RAMP

TEMPORARY RAMPS

STATION	LOCATION	LENGTH "L"	QUANTITY
STA 148+00	MAINLINE	12 FT.	29 SQ YD
STA 191+00	MAINLINE	12 FT.	29 SQ YD
STA 195+00	MAINLINE	12 FT.	29 SQ YD
STA 279+00	MAINLINE	12 FT.	29 SQ YD
STA 185+04	SIDEROAD # 1	5 FT	13 SQ YD
STA 224+66	SIDEROAD # 2	5 FT	12 SQ YD
STA 277+71	SIDEROAD # 3	5 FT	12 SQ YD
	TOTAL		153 SQ YD

MILLING AND TEMPORARY RAMP SCHEDULES

SCALE:	APPROVED BY:	DRAWN BY:
DATE:		REVISED:
		DRAWING NUMBER: