
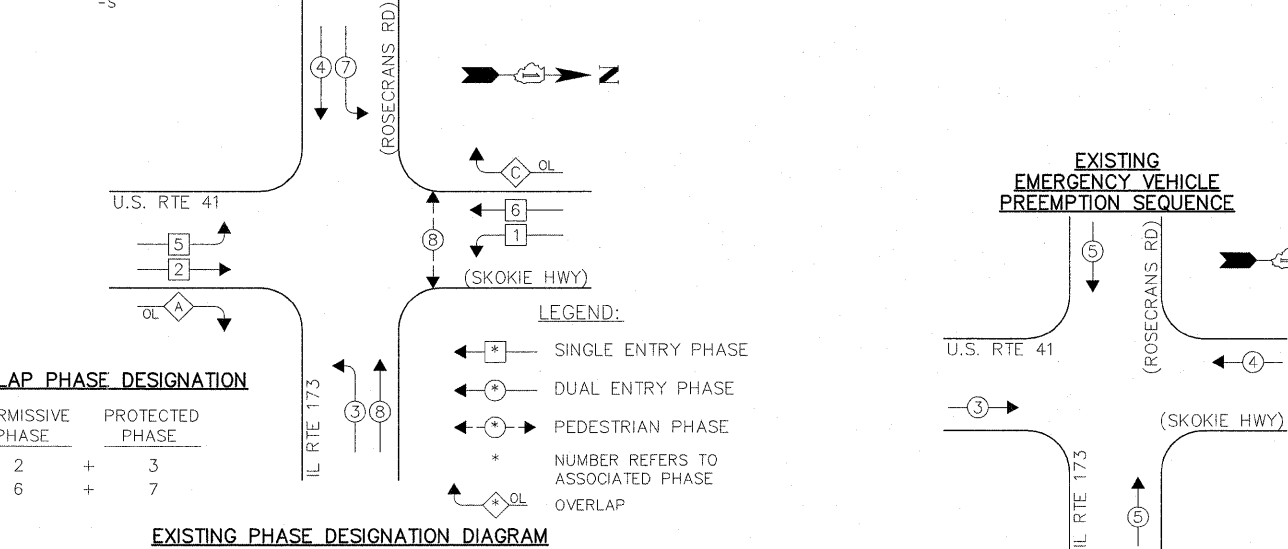


SCHEDULE OF QUANTITIES
U.S. RTE 41 (SKOKIE HIGHWAY) AT IL RTE 173 (ROSECRANS ROAD)

NO.	QUANT.	UNIT	DESCRIPTION
1.	40	SQ FT	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
2.	1	EACH	MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
3.	1	EACH	FULL-ACTUATED CONTROLLER AND TYPE IV CABINET
4.	114	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C
5.	7	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST-ARM MOUNTED
6.	4	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, MAST-ARM MOUNTED
7.	4	EACH	SIGNAL HEAD, LED, 2-FACE, 1-3 SECTION, 1-5 SECTION, BRACKET MOUNTED
8.	2	EACH	PEDESTRIAN SIGNAL HEAD, LED, 1-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER
9.	15	EACH	INDUCTIVE LOOP DETECTOR
10.	4	EACH	PEDESTRIAN PUSH-BUTTON
* 11.	1	EACH	RELOCATE EXISTING EMERGENCY VEHICLE PRIORITY SYSTEM, PHASING UNIT
12.	1	EACH	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
13.	1	EACH	RETROREFLECTIVE TRAFFIC SIGNAL BACKPLATE
14.	1	EACH	UNINTERRUPTIBLE POWER SUPPLY
* 15.			ITEM PAID FOR BY THE NEWPORT TOWNSHIP FIRE PROTECTION DISTRICT

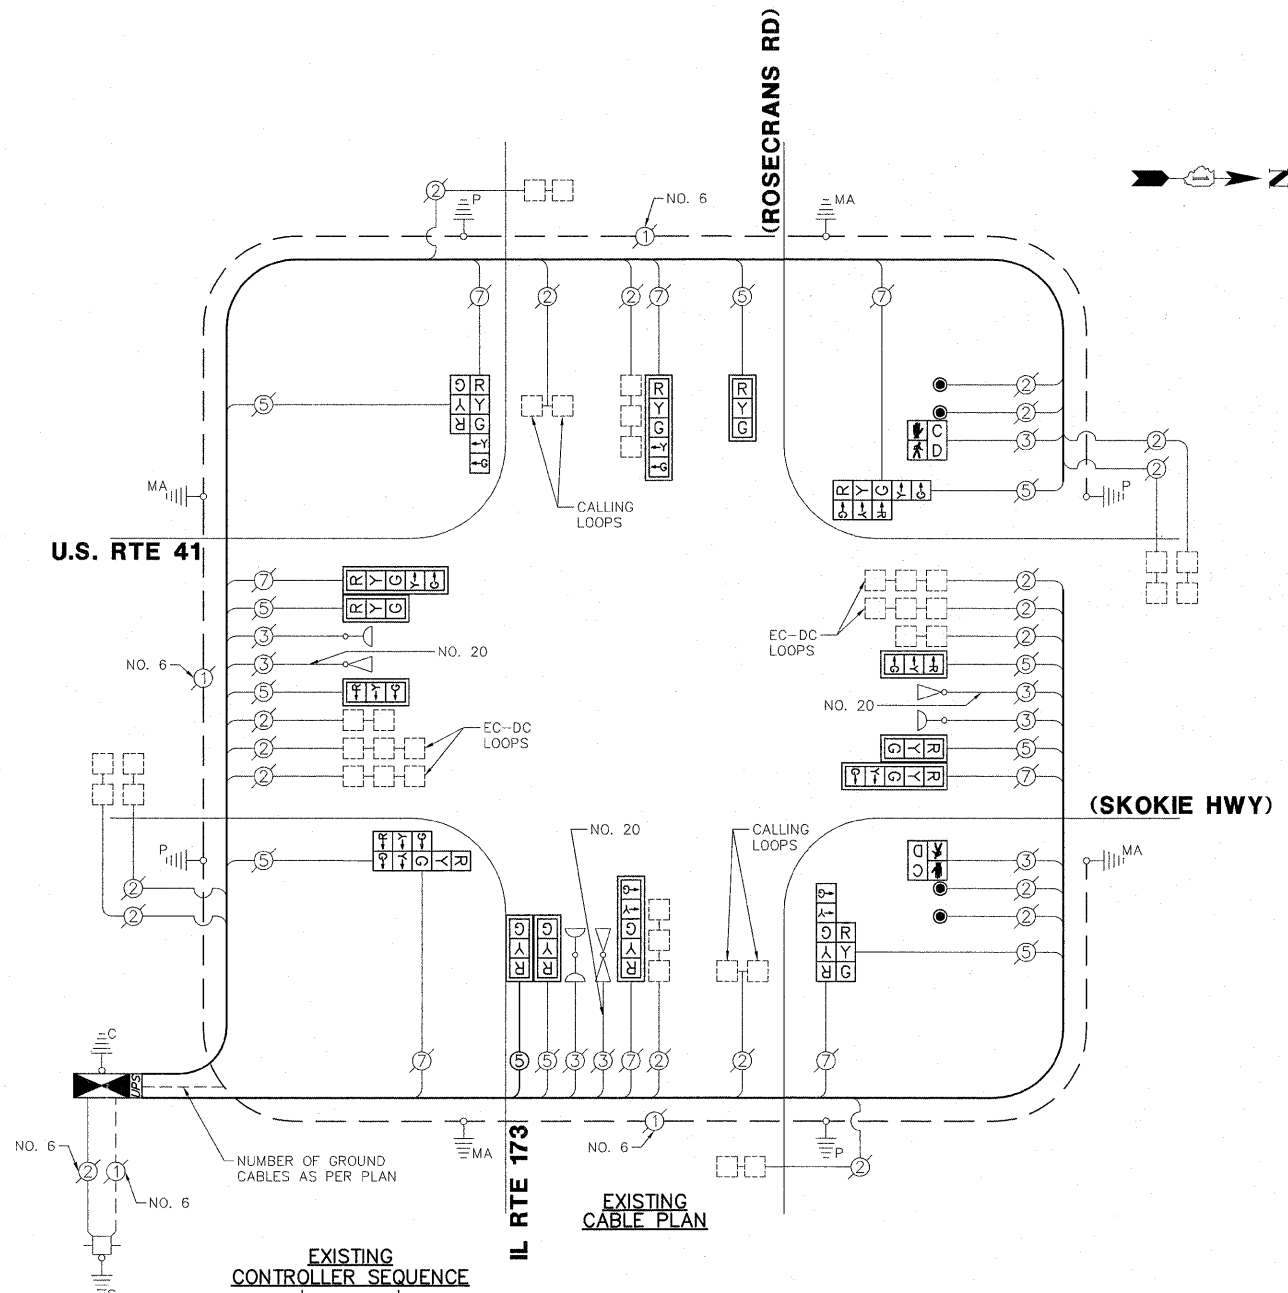

EMERGENCY VEHICLE PREEMPTOR	3	4	5
MOVEMENT			

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO. LAMPS	INCAND.	L.E.D.	% OPERATION	
SIGNAL (RED)	19	135	17	0.50	181.5
SIGNAL (YELLOW)	19	135	25	0.25	118.75
SIGNAL (GREEN)	19	135	15	0.25	71.25
ARROW	16	135	12	0.10	19.2
PED. SIGNAL	2	90	25	1.00	50.0
CONTROLLER	1	-	100	1.00	100.0
LUMINAIRE	-	-	250	0.50	-
L.E.D. ST. NAME SIGN	-	-	64	0.50	-
VIDEO SYSTEM	-	-	150	1.00	-
BATTERY BACKUP	1	-	25	1.00	25.0
ILLUMINATED SIGN	-	-	25	0.05	-
TOTAL =					545.7

ENERGY COSTS - BILLED TO: IDOT DISTRICT 1
(ADDRESS) 201 WEST CENTER COURT
(ADDRESS) SCHAMBURG, IL 60196
ENERGY SUPPLY - CONTACT: ALICE TAYLOR
PHONE: 847.816.5458
COMPANY: COMED