



**Mechanical Room Doors**



There are four sets of double doors (exterior) for the mechanical rooms on either side of the bridge that shall be painted.

There are two interior doors on each side (4 total) that shall be painted.

The fiberglass wall jackets will not need painting, but the interior of all the mechanical rooms walls need to be power washed/steam cleaned per Art. 592.03 of the "Standard Specifications". All mechanical and electrical equipment shall be protected. Cost of cleaning walls included in cost of "Bridge Tender House Rehabilitation".



NOTE: The door on the northwest side; exterior; the locks shall be replaced. Cost included in the cost of "Bridge Tender House Rehabilitation".

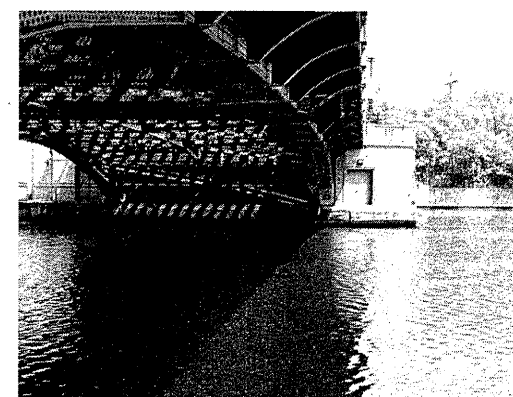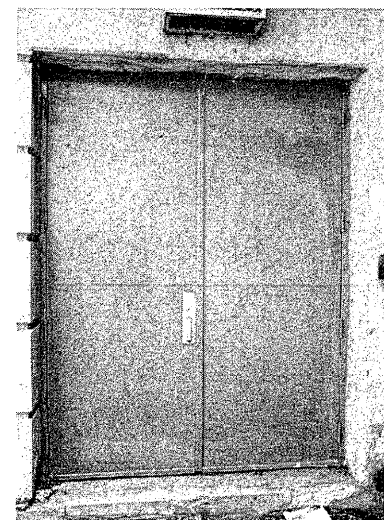

FILE NAME =	USER NAME = mdyjo	DESIGNED - RTD	REVISED -
os:\pw_work\pw\dot\m\dyjo\0148931\Design\		DRAWN -	REVISED -
	PLOT SCALE = 1/8" = 1' / in.	CHECKED -	REVISED -
	PLOT DATE = 7/11/2011	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**RUBY ST OVER DES PLAINES RIVER  
SN 099-9901**

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
112	M-BDR-1	WILL	66	38A
CONTRACT NO. 62714				
ILLINOIS FED. AID PROJECT				