




GRACE STREET
STA. 14+03.30

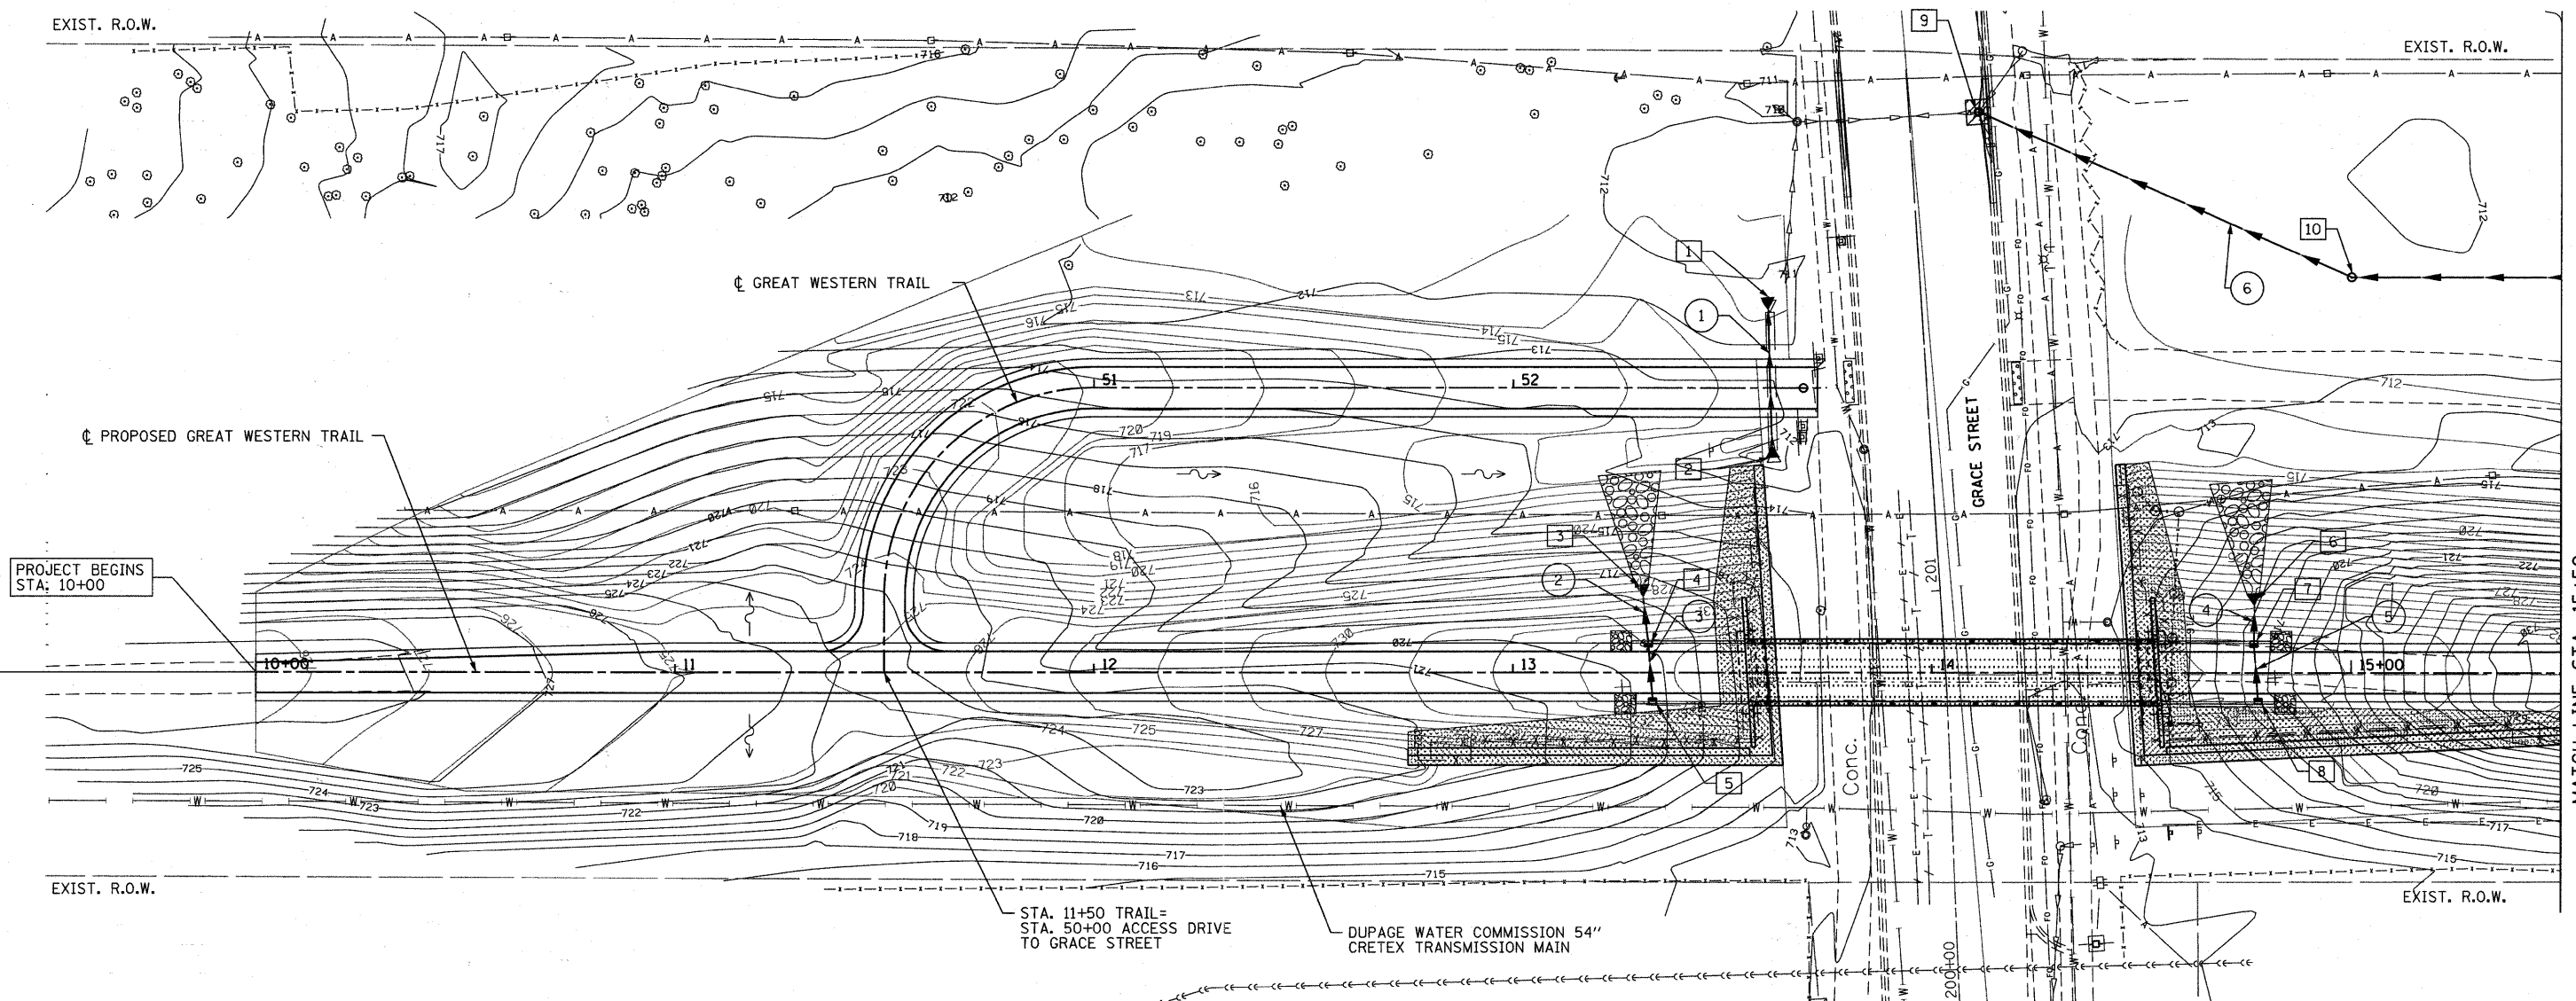

PROJECT BEGINS
STA. 10+00

MATCH LINE STA. 15+50

- | | | |
|--|---|---|
| <p>1 STA. 13+61.00, 90.07' LT
PRC FLAR END SEC, 12"
S INV=711.10</p> <p>2 STA. 13+62.36, 49.85' LT
PRC FLAR END SEC, 12"
N INV=711.40</p> <p>3 STA. 13+30.96, 19.55' LT
PRC FLAR END SEC, 12"
S INV=729.39</p> <p>4 STA. 13+32.29, 6.87' LT
INLET TB, T3 F&G
RIM ELEV=733.70
N INV=729.57
S INV=729.57</p> <p>5 STA. 13+33.30, 6.87 RT
INLET TA, T3 F&G
RIM ELEV=733.70
N INV=729.70</p> | <p>6 STA. 14+76.77, 17.54' LT
PRC FLAR END SEC, 12"
S INV=730.30</p> <p>7 STA. 14+76.80, 6.87' LT
INLET TB, T3 F&G
RIM ELEV=734.59
N INV=730.46
S INV=730.46</p> <p>8 STA. 14+77.81, 6.88' RT
INLET TA, T3 F&G
RIM ELEV=734.59
N INV=730.59</p> <p>9 STA. 14+10.95, 134.90' LT
CB TA, T3 F&G
RIM ELEV=712.00
SE INV=708.00</p> <p>10 STA. 15+00.00, 95.00' LT
INLET TB, T8 F&G
RIM ELEV=711.50
NW INV=708.50
E INV=708.50</p> | <p>1 STORM SEWERS CLASS A,
TYPE 2 - 12" = 30 FT @1%</p> <p>2 STORM SEWERS CLASS A,
TYPE 2 - 12" = 12 FT @1%</p> <p>3 STORM SEWERS CLASS A,
TYPE 2 - 12" = 13 FT @1%</p> <p>4 STORM SEWERS CLASS A,
TYPE 2 - 12" = 10 FT @1%</p> <p>5 STORM SEWERS CLASS A,
TYPE 2 - 12" = 13 FT @1%</p> <p>6 STORM SEWERS CLASS A,
TYPE 2 - 12" = 98 FT @0.5%</p> |
|--|---|---|

STA. 11+50 TRAIL=
STA. 50+00 ACCESS DRIVE
TO GRACE STREET

DUPAGE WATER COMMISSION 54"
CRETEX TRANSMISSION MAIN

FILE NAME = M:\756-004_Lombard - DWG Brdgas Phase II\CADD Sheets\0756004-ant-drain\ldgn

Bollinger, Lach & Associates, Inc.
ITASCIA, ILLINOIS

USER NAME = gonzalo	DESIGNED - BD	REVISED - 9-12-11
PLOT SCALE = 20.00' / IN.	DRAWN - DC	REVISED -
PLOT DATE = 9/13/2011	CHECKED - BD	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS
GREAT WESTERN TRAIL**

DRAINAGE, GRADING AND UTILITIES

SCALE: 1"=20' SHEET NO. SHEETS STA. 10+00 TO STA. 15+50

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	06-00151-00-BR	DUPAGE	201	38
CONTRACT NO. 63568				
ILLINOIS FED. AID PROJECT				