


NOTE:
THE TRAFFIC SIGNAL CONTROL
EQUIPMENT FOR THIS PROJECT
SHALL BE 'EAGLE' TO MATCH
THE EXISTING ADJACENT SYSTEM.

INTERCONNECT SCHEDULE OF QUANTITIES

ITEM	UNIT	TOTAL
CONDUIT IN TRENCH, 2" DIA., GALVANIZED STEEL	FOOT	142
CONDUIT PUSHED, 2" DIA., GALVANIZED STEEL	FOOT	60
TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	138
MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION	EACH	1
FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125, MM12F SM12F	FOOT	578.5
ELECTRIC CABLE IN CONDUIT, TRACER, NO. 14 1C	FOOT	552.5
DRILL EXISTING HANDHOLE	FOOT	1
REMOVE ELECTRIC CABLE FROM CONDUIT	FOOT	1,079.0
OPTIMIZE TRAFFIC SIGNAL SYSTEM	EACH	1
TEMPORARY TRAFFIC SIGNAL TIMING	EACH	1

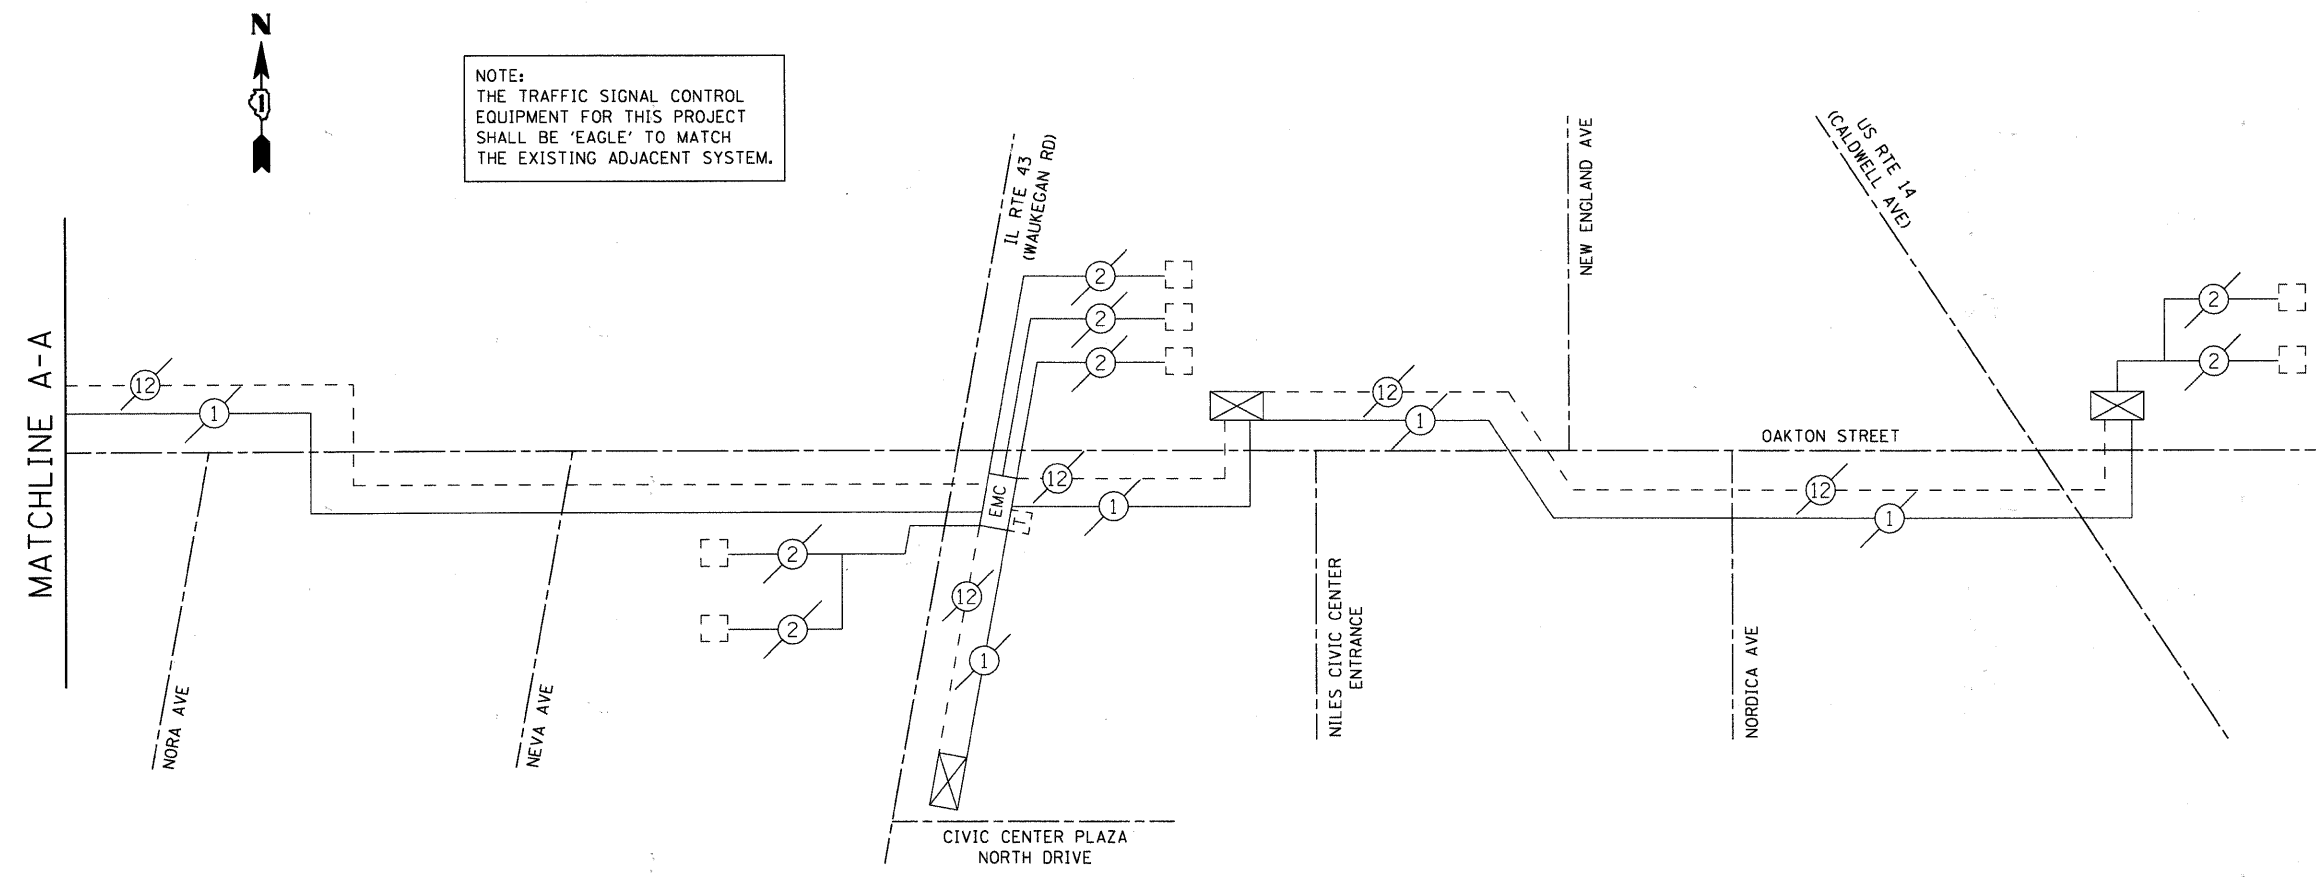

COMPANY NAME: HRGreen.com
PROJECT CONTACT: #PROJECT_CONTACT1
CLIENT: #CLIENT1
DATE PLOTTED: 7/20/2011 4:59:12 PM
FILE NAME: 86100065-sigINTOL.dgn
PLOT DRIVER: pdfLpr
PEN TABLE: standard-trans.tbl



USER NAME = Char-ke	DESIGNED - JJS	REVISED -
	DRAWN - JJS	REVISED -
PLOT SCALE = NTS	CHECKED - PAM	REVISED -
PLOT DATE = 7/20/2011	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**INTERCONNECT SCHEMATIC
OAKTON STREET /OAK MILL MALL ENTRANCE
FROM IL RTE 21 TO US RTE 14**

SCALE: NTS SHEET NO. 8 OF 8 SHEETS STA. TO STA.

F.A.P. RTE. 374	SECTION 10-00111-00-LS	COUNTY COOK	TOTAL SHEETS 62	SHEET NO. 56
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT	
			CONTRACT NO. 63622	